
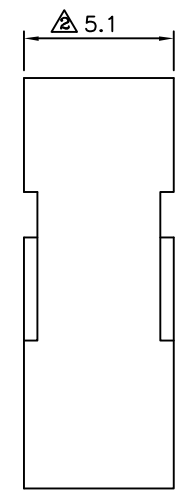


**△ SPECIFICATION**  
 Current Rating:3A AC/DC  
 Voltage Rating:250V AC/DC  
 Temperature Range:-25°C~+85°C  
 Insulation Resistance:1000 Megaohms Min.  
 Withstand Voltage:800V AC/Minute  
**△ Material:**Noryl(UL94V-1),Black  
 RoHS Compliant

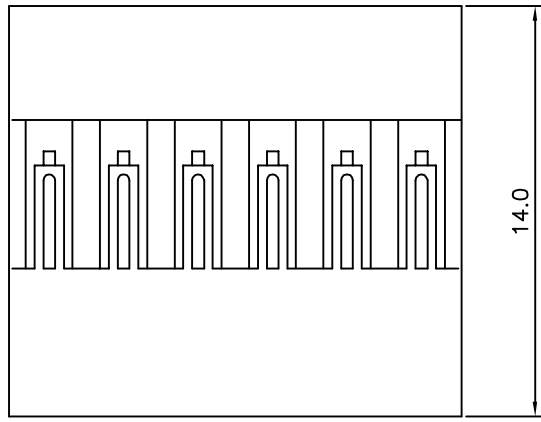

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE $\Delta$ .X $\pm$ 0.38 .XX $\pm$ 0.25				
17471		MEI			$\Delta$ A3	Modify Data	HZF	09/06/2010
		CHECKED BY			$\Delta$ A2	Modify Data	HZF	02/26/2010
		DRAWING BY			$\Delta$ A1	Modify Material	INGRID	09/27/2007
SCALE	NONE	REV.	A3	UNIT	$\Delta$ A0	NEW RELEASE		
				mm	NO. REV. REVISIONS		CHK	DATE