


△ 2 6~12P

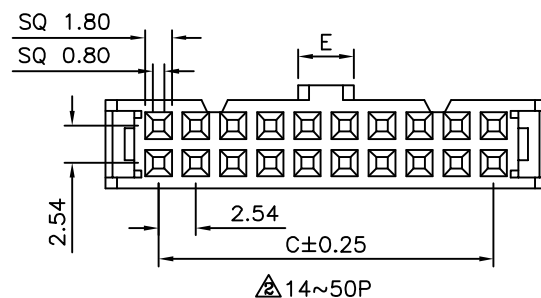

Pin	A	B	C	D	E
6	12.32	6.35	5.08	12.12	1.9
8	14.86	8.89	7.62	14.66	1.9
10	17.40	11.43	10.16	17.20	3.8
12	19.94	13.97	12.70	19.74	3.8
14	22.48	16.51	15.24	22.28	3.8
16	25.02	19.05	17.78	24.82	3.8
20	30.10	24.13	22.86	29.90	3.8
24	35.18	29.21	27.94	34.98	3.8
26	37.72	31.75	30.48	37.52	3.8
30	42.80	36.83	35.56	42.60	3.8
34	47.88	41.91	40.64	47.68	3.8
40	55.50	49.53	48.26	55.30	3.8
50	68.20	62.23	60.96	68.00	3.8

4U CON 元化興業股份有限公司
4U CON TECHNOLOGY INC.

DRAWING No.

17504

SCALE	NONE
-------	------

NONE

APPROVED BY

MEI

CHECKED BY

HZF


DRAWING BY

CYP

REV.	
------	--

B3

UNLESS OTHERWISE SPECIFIED	
TOLERANCES ARE	
$\triangle_3 \triangle_2$	X. ± 0.30
	.X ± 0.20
	.XX ± 0.10
	.XXX ± 0.05



A	D3

3	Modify Data
---	-------------

1175

06 / 24 / 2015

A	B2

2	Modify Data
---	-------------

HZF

09/24/2010

	
	R1

	meanly, data
1	Del. Bin #60 Bin #64

475

11 / 28 / 2007

$\Delta 1$	B1
Δ	B2

1	Del Fm#60,Fm#64
2	NEW RELEASE

HZF

DECM

11/28/2007	
2:12:10000	

		BO

0	NEW RELEASE
---	-------------

BECK

04/04/2006	
------------	--