

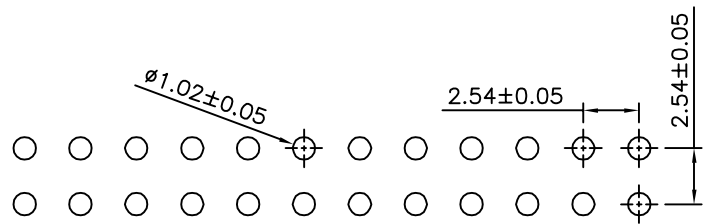
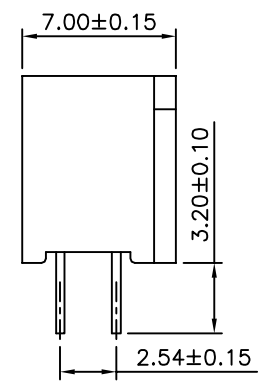


SPECIFICATION
 Current Rating:3 Amp
 Withstand Voltage:500V AC/Minute
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operation Temperature:-40°C~+105°C
 Contact:Brass,Gold Flash Over Nickel
 Insulator:PA6T+30%G.F.(UL94V-0),Black
 RoHS Compliant

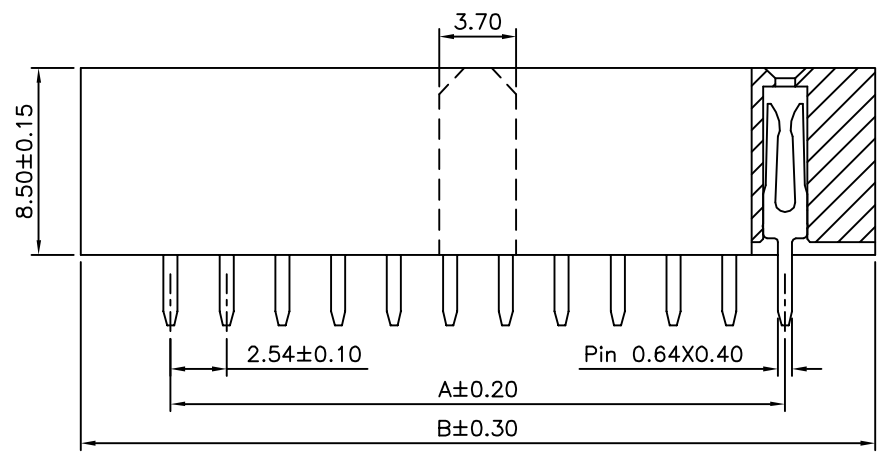

Recommended P.C.B. Layout

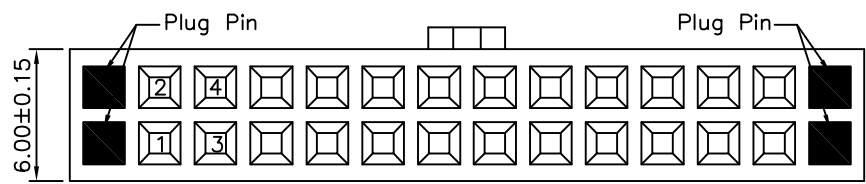

| Pin | A | B | Pin | A | B |
|-----|-------|-------|-----|-------|--------|
| 02 | — | 7.82 | 40 | 48.26 | 56.08 |
| 04 | 2.54 | 10.36 | 42 | 50.80 | 58.62 |
| 06 | 5.08 | 12.90 | 44 | 53.34 | 61.16 |
| 08 | 7.62 | 15.44 | 46 | 55.88 | 63.70 |
| 10 | 10.16 | 17.98 | 48 | 58.42 | 66.24 |
| 12 | 12.70 | 20.52 | 50 | 60.96 | 68.78 |
| 14 | 15.24 | 23.06 | 52 | 63.50 | 71.32 |
| 16 | 17.78 | 25.60 | 54 | 66.04 | 73.86 |
| 18 | 20.32 | 28.14 | 56 | 68.58 | 76.40 |
| 20 | 22.86 | 30.68 | 58 | 71.12 | 78.94 |
| 22 | 25.40 | 33.22 | 60 | 73.66 | 81.48 |
| 24 | 27.94 | 35.76 | 62 | 76.20 | 84.02 |
| 26 | 30.48 | 38.30 | 64 | 78.74 | 86.56 |
| 28 | 33.02 | 40.84 | 66 | 81.28 | 89.10 |
| 30 | 35.56 | 43.38 | 68 | 83.82 | 91.64 |
| 32 | 38.10 | 45.92 | 70 | 86.36 | 94.18 |
| 34 | 40.64 | 48.46 | 72 | 88.90 | 96.72 |
| 36 | 43.18 | 51.00 | 74 | 91.44 | 99.26 |
| 38 | 45.72 | 53.54 | 76 | 93.98 | 101.80 |

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

| | | | | |
|-------------|------|-------------|----|--|
| DRAWING No. | | APPROVED BY | | UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.30 .XX ±0.20 ANG. |
| 17525 | | EMILY | | |
| | | HZF | | |
| | | DRAWING BY | | |
| | | CYP | | |
| SCALE | NONE | REV. | A0 | UNIT mm |

| | | | | |
|------|------|-------------|-----|------------|
| NO. | REV. | DESCRIPTION | CHK | DATE |
| △ A0 | | NEW RELEASE | HZF | 01/31/2015 |
| | | REVISIONS | | |