


SPECIFICATION

- General Characteristics**
3.0mm Micro-Fit Wafer 2XXX SMT 90°
With Post Black Insulator Tin Plated
Tape&Reel 200 PCS/Reel
- Material&Finish**
Insulator:LCP(UL94V-0)
Contact:Brass,Tin Plated
- Electrical Characteristics**
Current Rating:5A AC,DC
Voltage Rating:250V AC,DC
Contact Resistance:10 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Withstand Voltage:1500V AC/Minute
- Environmental Characteristics**
Temperature Range:-25°C~+85°C
- RoHS Compliant**

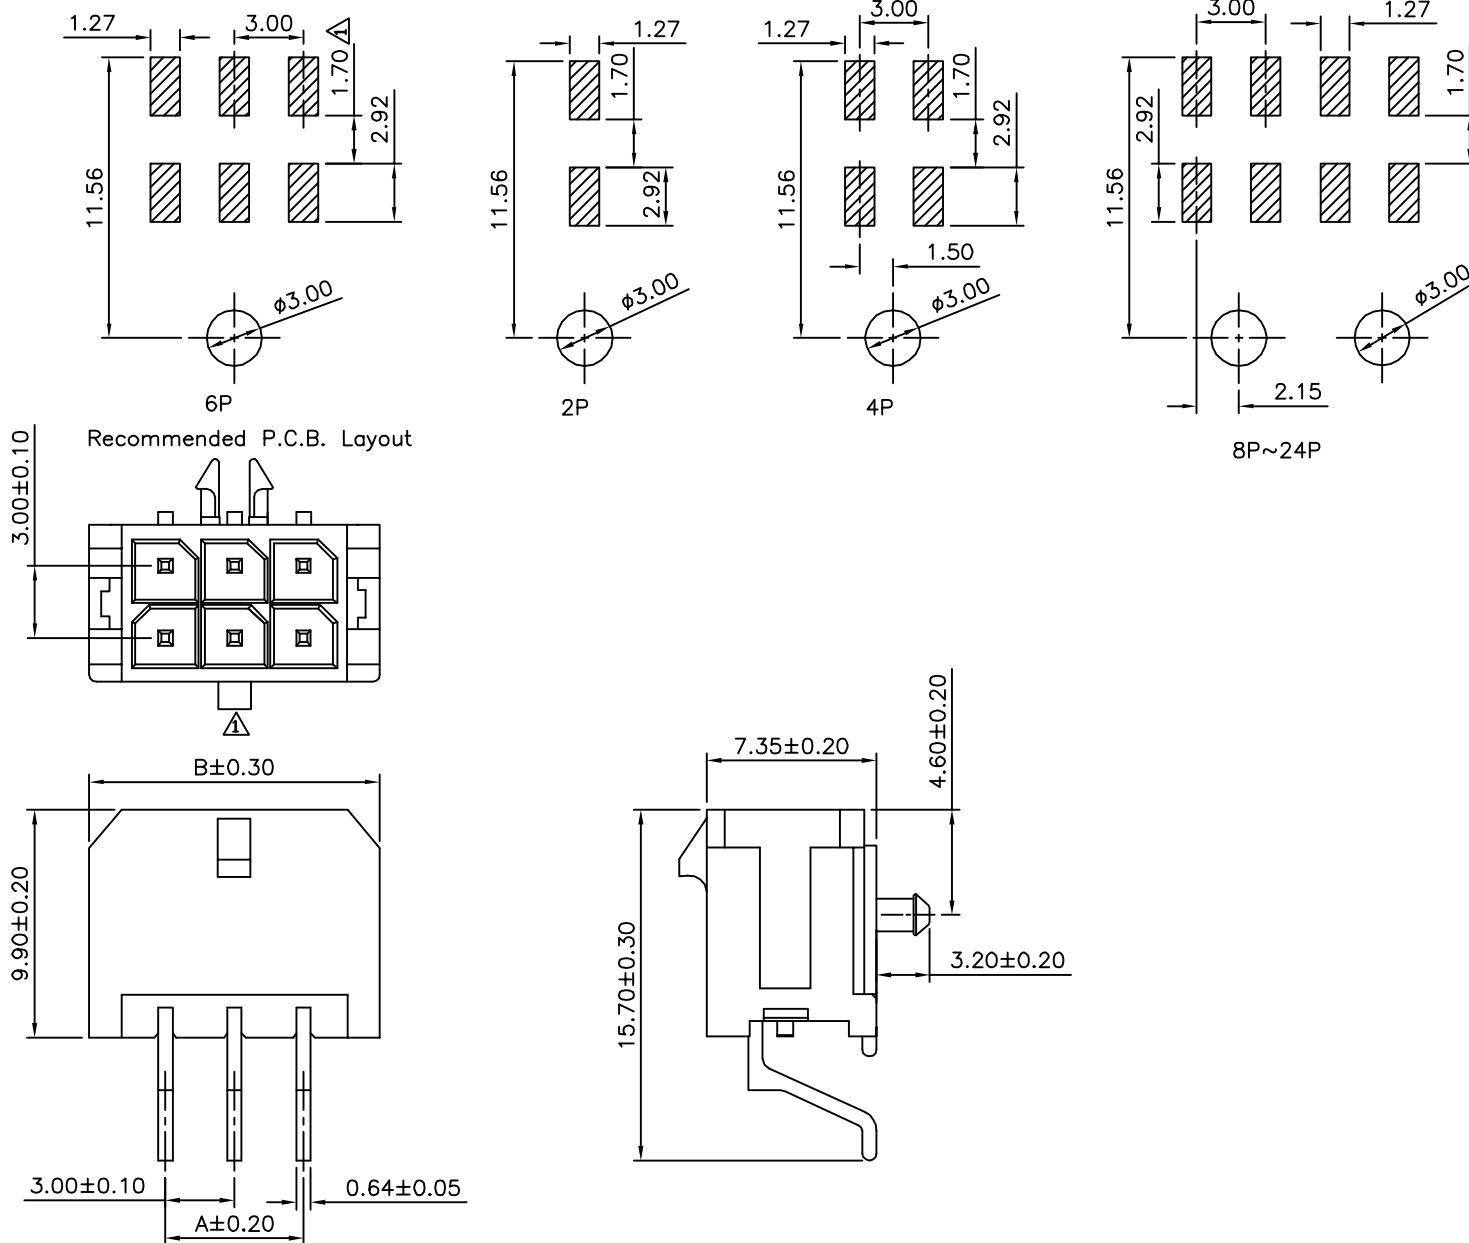

Pin	A	B
2	--	6.65
4	3.00	9.65
6	6.00	12.65
8	9.00	15.65
10	12.00	18.65
12	15.00	21.65
14	18.00	24.65
16	21.00	27.65
18	24.00	30.65
20	27.00	33.65
22	30.00	36.65
24	33.00	39.65

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.
18090

APPROVED BY
MEI
CHECKED BY
HZF
DRAWING BY
CYP

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
X. ±0.30
.X ±0.25
.XX ±0.20
.XXX ±0.015

SCALE NONE


REV. A1

UNIT mm

NO. REV. REVISIONS

CHK DATE

A1 Modify Data HZF 12/18/2014
A0 NEW RELEASE HZF 04/30/2012

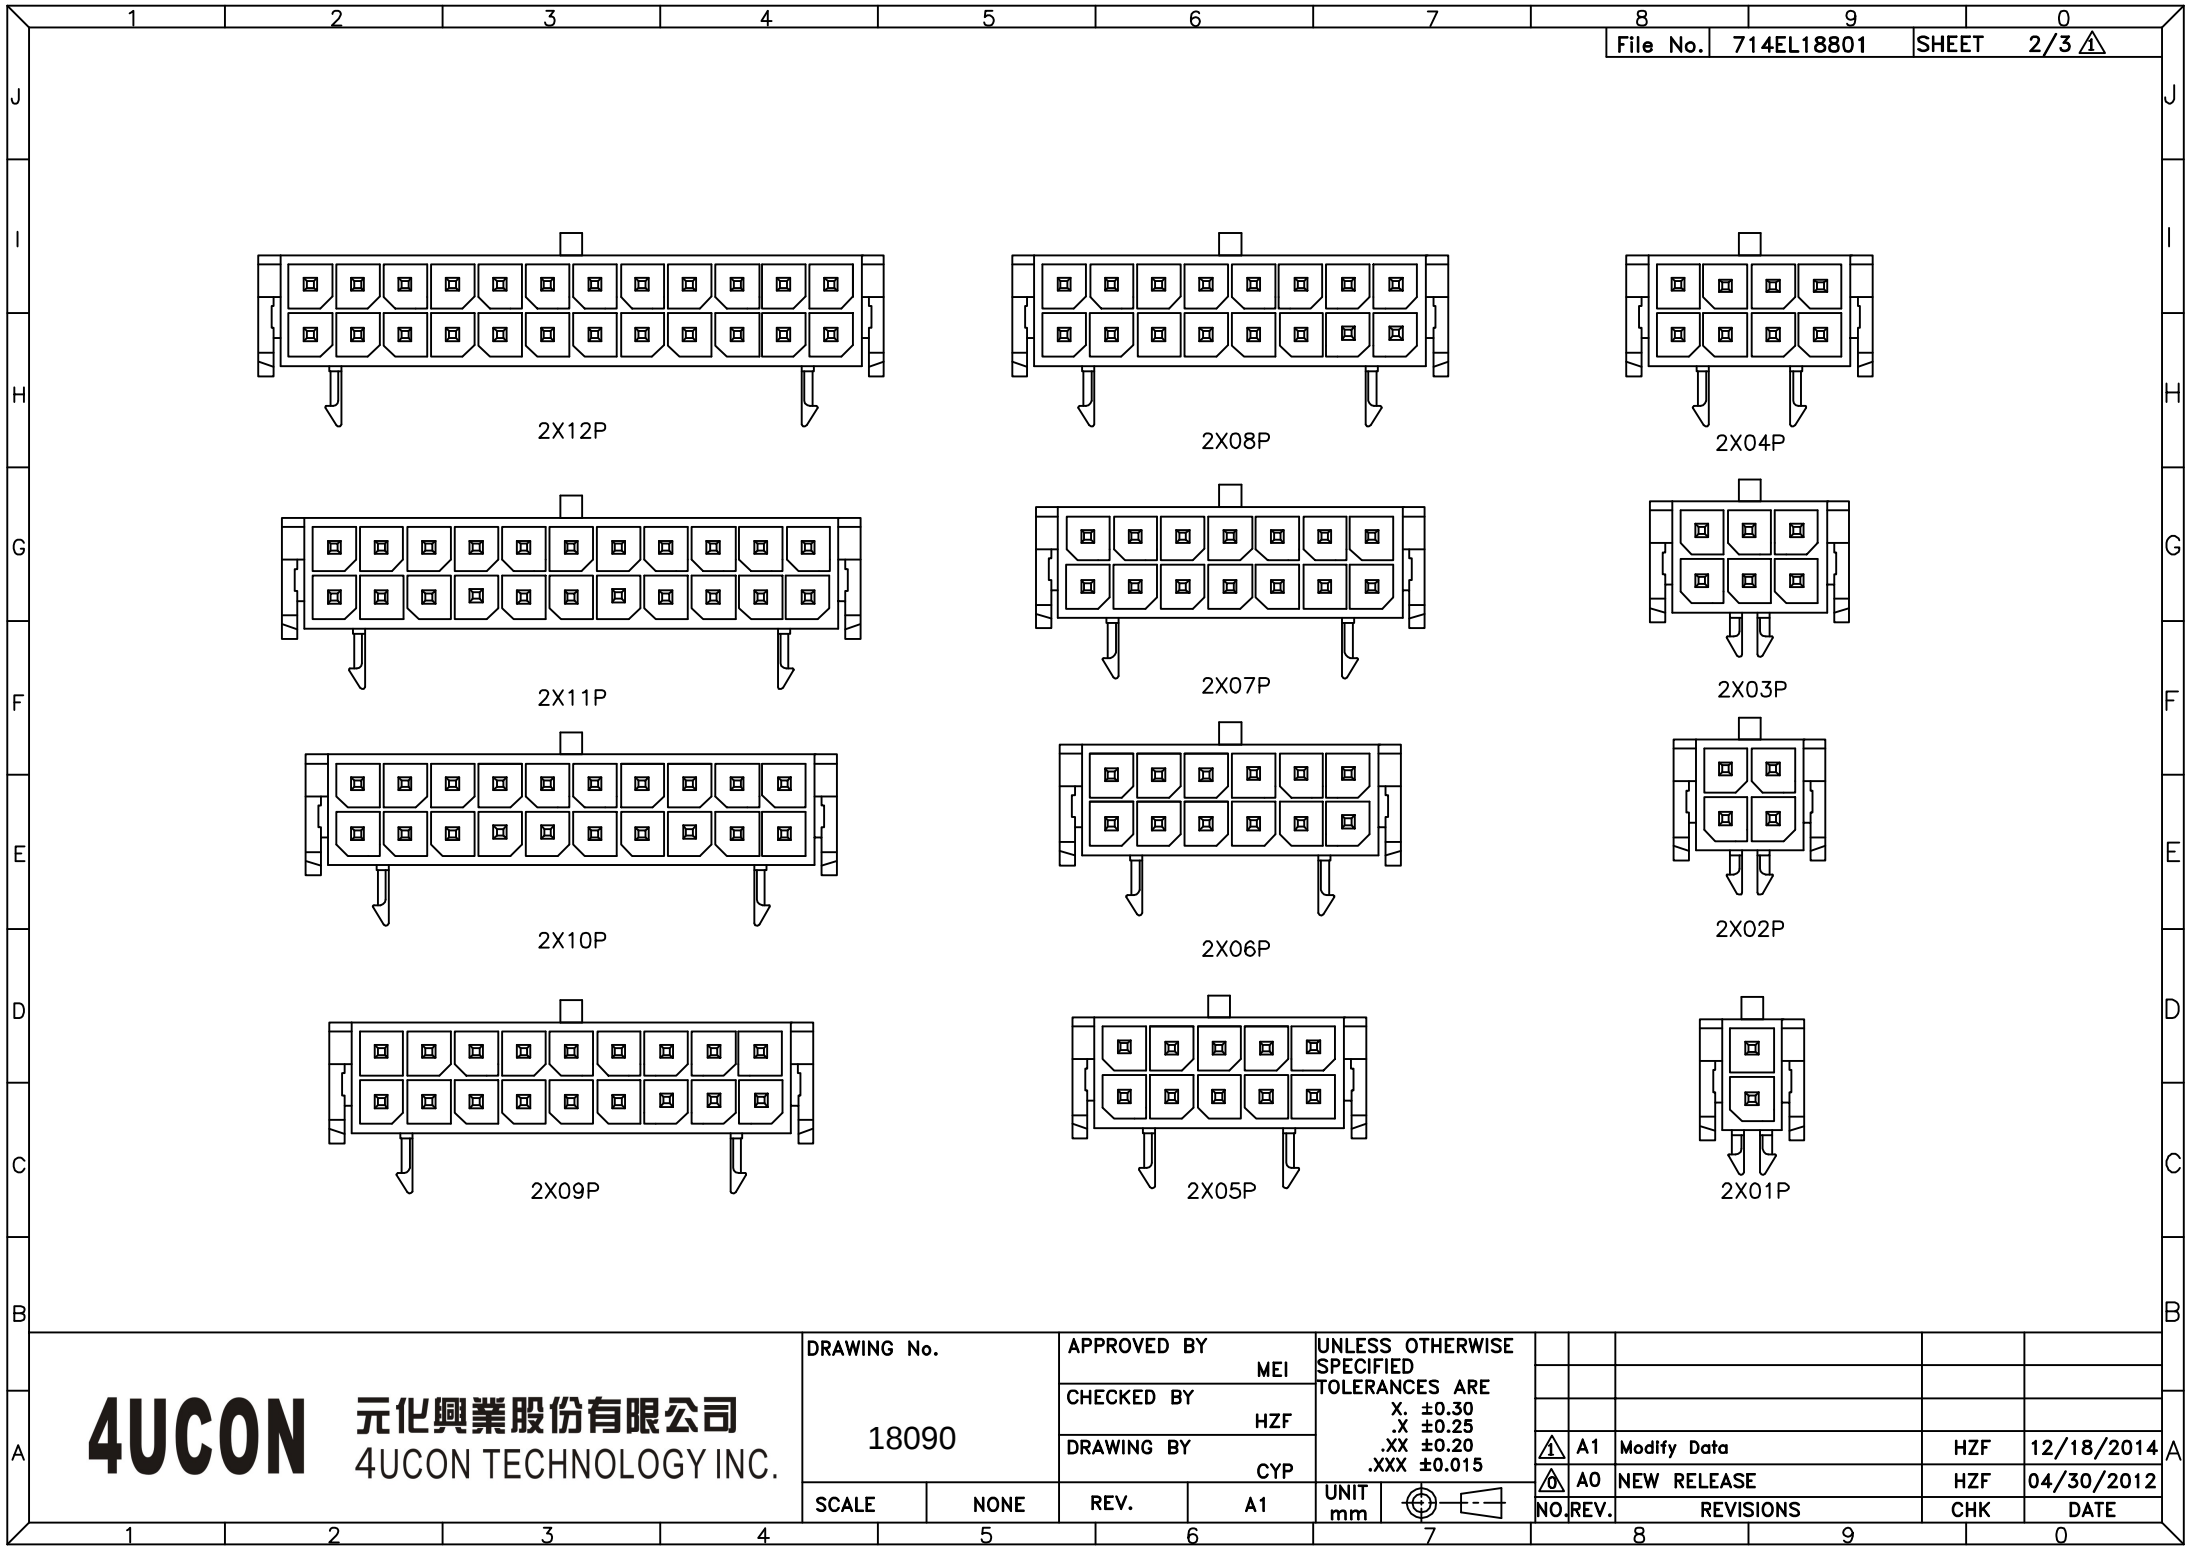




4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY	
		MEI	
		CHECKED BY	
18090		HZF	
		DRAWING BY	
		CYP	
SCALE	NONE	REV.	A1

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
X. ±0.30
.X ±0.25
.XX ±0.20
.XXX ±0.015

⚠	A1	Modify Data		HZF	12/18/2014
⚠	A0	NEW RELEASE		HZF	04/30/2012
NO.	REV.	REVISIONS		CHK	DATE

SPECIFICATION
Q'ty:200 PCS/Reel
RoHS Compliant

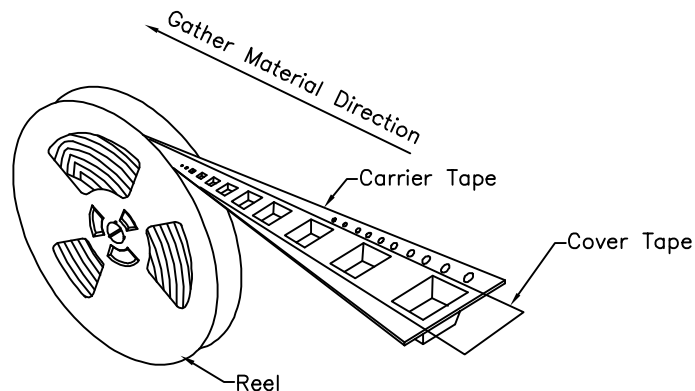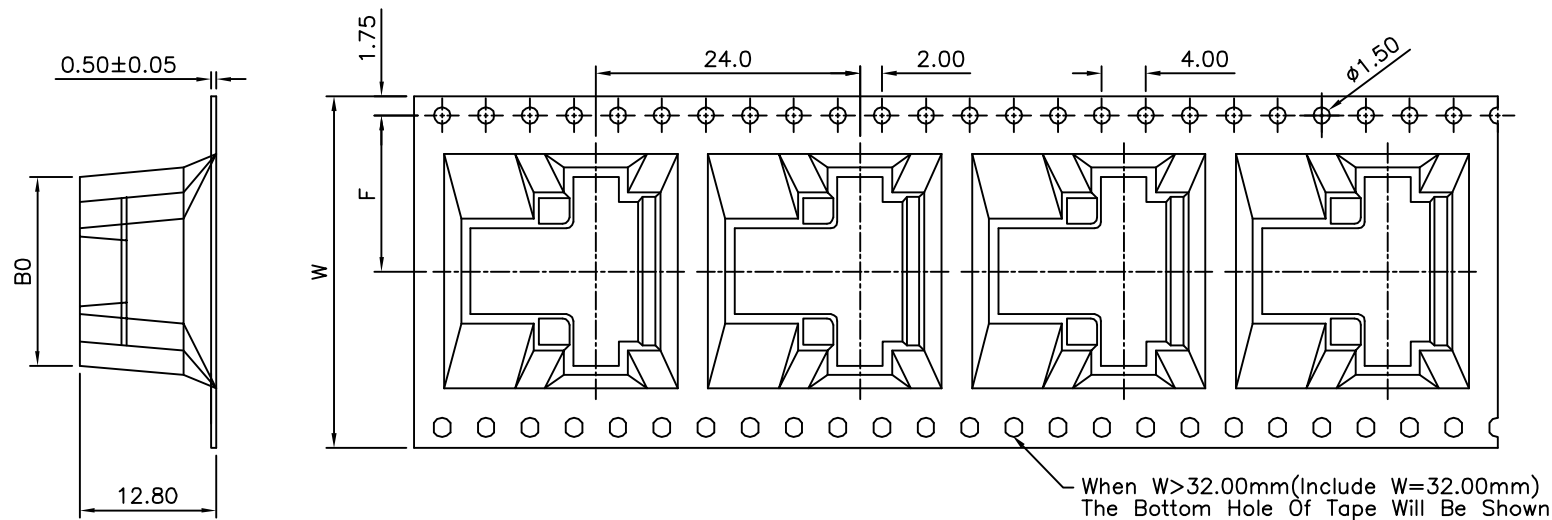

Pin	W	F	B0
02	24.0	11.50	11.0
04	32.0	14.20	13.90
06	32.0	14.20	16.90
08	44.0	20.20	20.50
10	44.0	20.20	22.90
12	44.0	20.20	25.90
14	44.0	20.20	28.90
16	56.0	26.00	31.80
22	56.0	26.00	40.85
24	72.0	34.00	44.20

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.
18090

APPROVED BY
MEI
CHECKED BY
HZF
DRAWING BY
CYP

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
X. ±0.30
.X ±0.25
.XX ±0.20
.XXX ±0.015

SCALE NONE

REV. A1

UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△	A1	Modify Data	HZF	12/18/2014
△	A0	NEW RELEASE	HZF	04/30/2012