

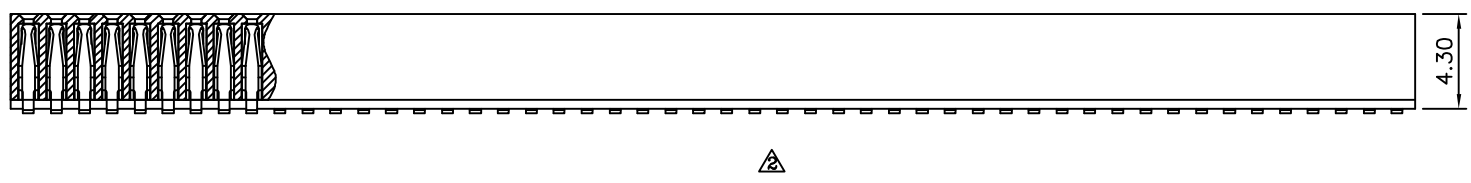
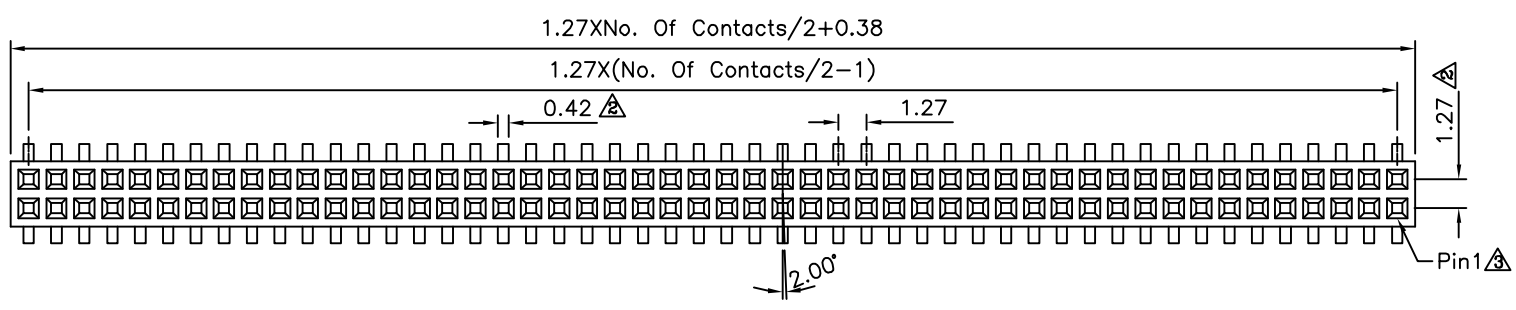


**△ SPECIFICATION**  
 Current Rating: 1 Amp  
 Insulation Resistance: 5000 Megaohms Min.  
 Dielectric Withstanding: 500V AC  
 Operating Temperature: -40°C ~ +105°C  
 Max. Processing Temperature:  
 230°C For 30~60 Seconds  
 (260°C For 10 Seconds)  
**△ Contact:** Phosphor Bronze, Gold Flash Over Nickel  
**Housing:** LCP (UL94V-0), Black  
 RoHS Compliant

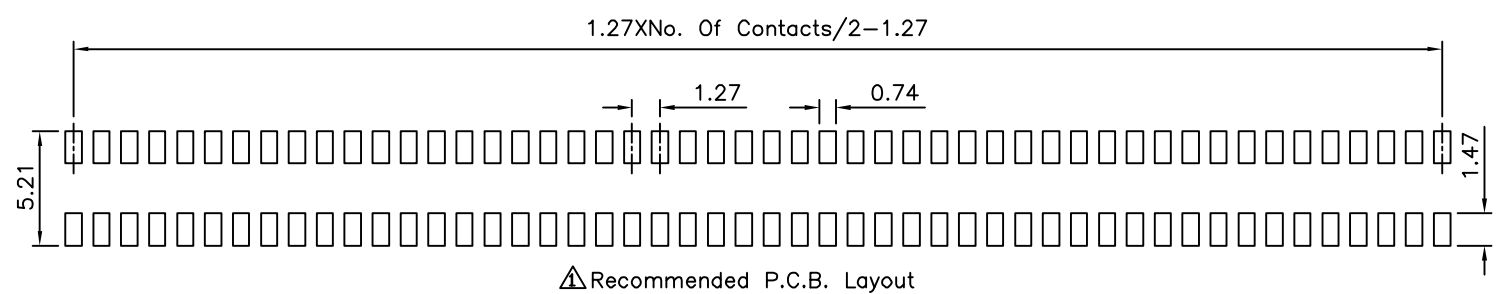

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.20 .X ±0.15 .XX ±0.10 .XXX ±0.05
18464		MEI		
		CHECKED BY		
		HZF		
		DRAWING BY		UNIT mm
		YBL		
SCALE	NONE	REV.	A3	NO. REV.

△ A3	Modify Data	HZF	09/26/2013
△ A2	Modify Data	HZF	04/29/2010
△ A1	Modify Data	BECKY	04/11/2006
△ A0	NEW RELEASE	BECKY	04/06/2005
NO. REV.	REVISIONS	CHK	DATE