

### △ SPECIFICATION

Current:1A

Withstanding Voltage:1000V AC Minute


Contact Resistance:20 Milliohms Max.

Insulation Resistance:5000 Megaohms Min.




Operation Temperature:-55°C~+105°C

Housing:PA6T(UL94V-0),Black

△ Contact:Brass,Gold Flash Over Nickel  
RoHS Compliant

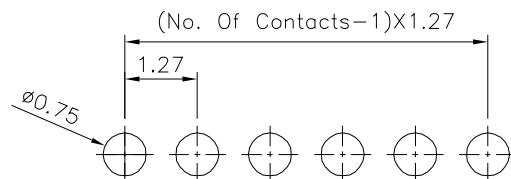

Recommended P.C.B Layout

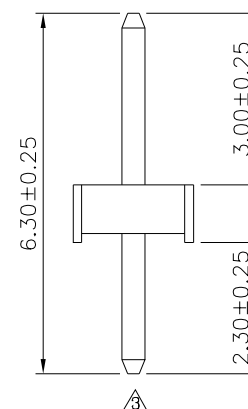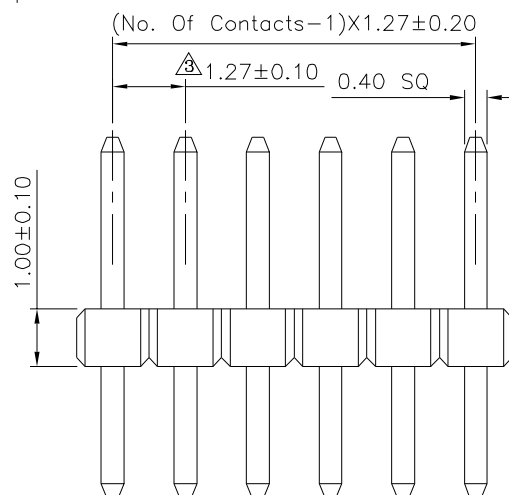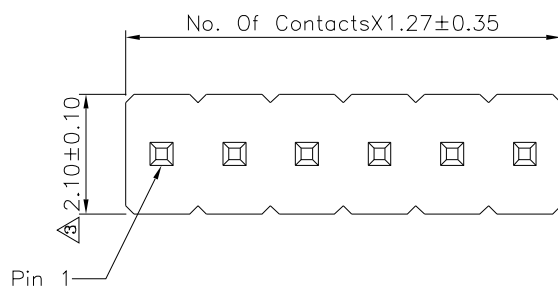

# 4UCON

元化興業股份有限公司  
4UCON TECHNOLOGY INC.

DRAWING No.

18611

SCALE NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

YBL

REV. B3


UNLESS OTHERWISE  
SPECIFIED  
TOLERANCES ARE

.X ±0.38

.XX ±0.25

ANG ±5°

UNIT  
mm



| NO. | REV. | REVISIONS   | CHK | DATE       |
|-----|------|-------------|-----|------------|
| △3  | B3   | Modify Data | HZF | 11/29/2013 |
| △2  | B2   | Modify Data | HZF | 08/25/2010 |
| △1  | B1   | Modify Data | HZF | 08/15/2009 |
| △0  | B0   | NEW RELEASE | HZF | 07/07/2009 |