

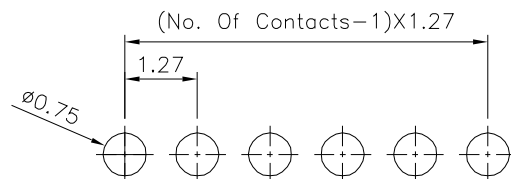
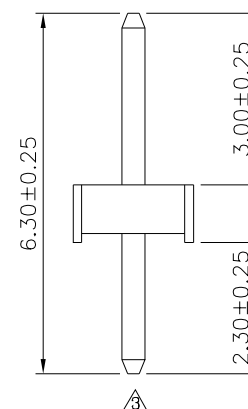


△ SPECIFICATION

Current:1A
 Withstanding Voltage:1000V AC Minute
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:5000 Megaohms Min.
 Operation Temperature:-55°C~+105°C
 Housing:PA6T(UL94V-0),Black
 △ Contact:Brass,Gold Flash Over Nickel
 RoHS Compliant

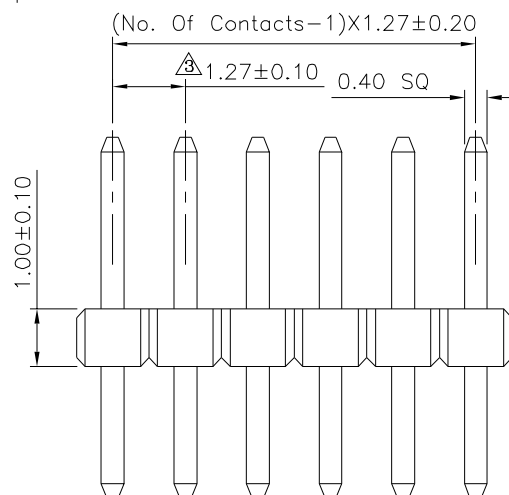

Recommended P.C.B Layout

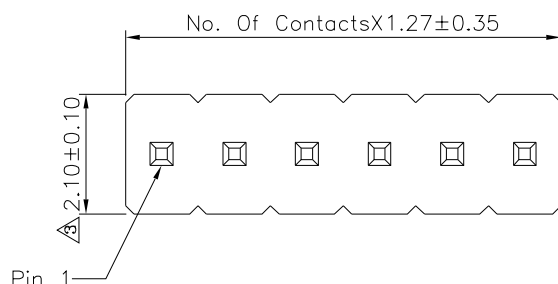

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

18613

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

YBL

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE


.X ±0.38

.XX ±0.25

ANG ±5°

UNIT

mm



NO.	REV.	REVISIONS	CHK	DATE
△3	B3	Modify Data	HZF	11/29/2013
△2	B2	Modify Data	HZF	08/25/2010
△1	B1	Modify Data	HZF	08/15/2009
△0	B0	NEW RELEASE	HZF	07/07/2009

SCALE NONE

REV.

B3