

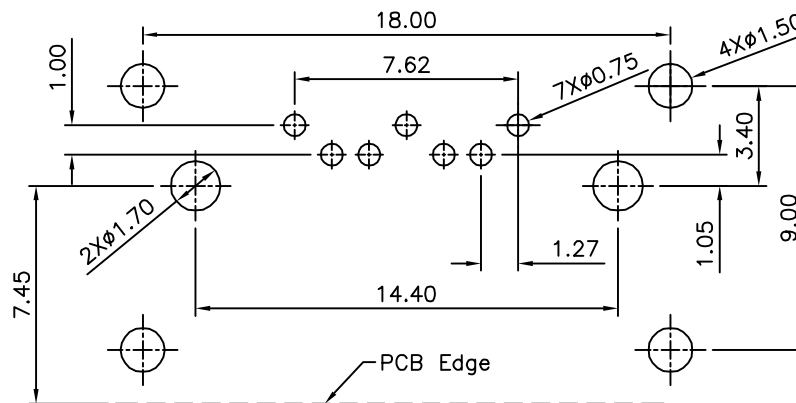
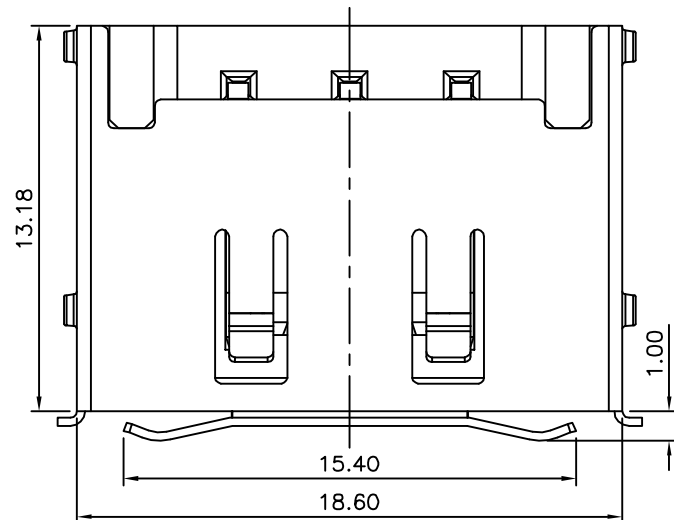


SPECIFICATION

Current Rating:1.5 Ampere Per Contact
 Contact Resistance:30 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Dielectric Withstanding Voltage:500V DC
 Operation Temperature:-40°C~+85°C
 Base:LCP(UL94V-0),Black
 Contact:Copper Alloy
 Gold Flash On Contact Area,
 Misty Tin Plated On Solder Tails,
 Over Nickel
 ⚠ Shell:Copper Alloy,Nickel Plated
 RoHS Compliant

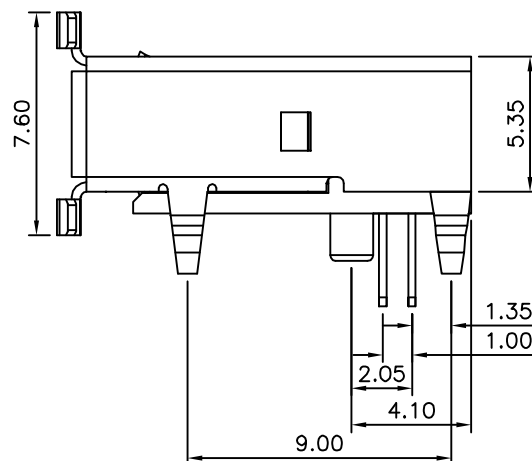

Recommended P.C.B. Layout

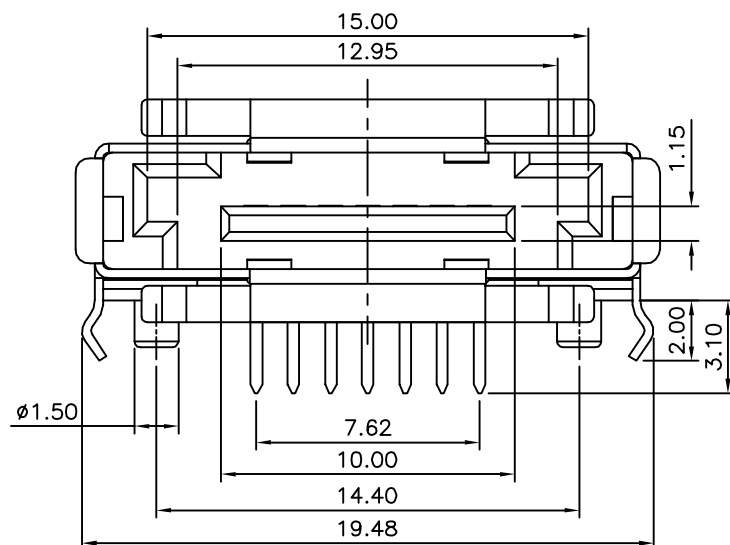

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

18649

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

WSS

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE
 .X ±0.30
 .XX ±0.25
 ANG. ±3°

SCALE

NONE

REV.

A1

UNIT
 mm



NO. REV.

A1 Modify Data

A0 NEW RELEASE

REVISIONS

CHK

DATE

HZF

12/13/2011

HZF

09/05/2010