


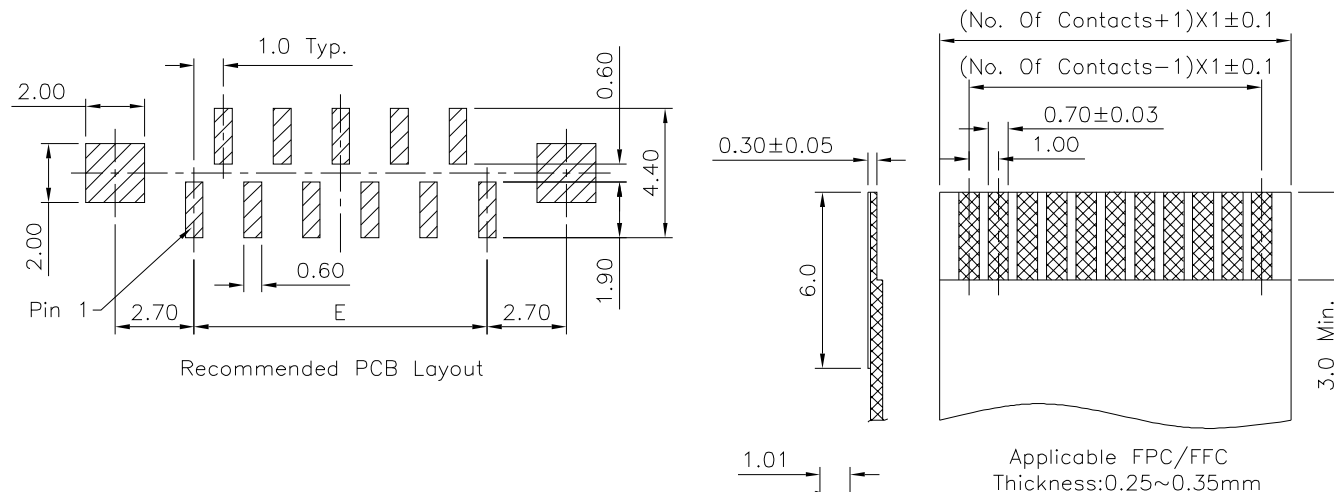

SPECIFICATION

1. General Characteristics:

1.0mm FPC XXP SMT 180° ZIF Single Contact
Standard Layout "Widening ZIF" Tape & Reel
900 PCS/Reel

2. Material&Finish:

Housing:PA9T(UL94V-0),Ivory
Slider:PPS(UL94V-0),Black
Terminal:Phosphor Bronze,Tin Plated Over Nickel
ME:Brass,Tin Plated Over Nickel

3. Electrical Characteristics:

Current Rating:0.5 Amp Max.
Operating Voltage:100V AC Max.
Dielectric Withstanding Voltage:500V AC RMS
Contact Resistance:30 Milliohms Max.
Insulation Resistance:500 Megaohms Min.

4. Environmental Characteristics:

Operation Temperature:-40°C~+85°C

5. RoHS Compliant

Pin	A±0.20	B±0.15	C±0.25	D±0.10	E±0.15
4P	9.85	3.00	11.00	5.05	3.00
5P	10.85	4.00	12.00	6.05	4.00
6P	11.85	5.00	13.00	7.05	5.00
7P	12.85	6.00	14.00	8.05	6.00
8P	13.85	7.00	15.00	9.05	7.00
9P	14.85	8.00	16.00	10.05	8.00
10P	15.85	9.00	17.00	11.05	9.00
11P	16.85	10.00	18.00	12.05	10.00
12P	17.85	11.00	19.00	13.05	11.00
13P	18.85	12.00	20.00	14.05	12.00
14P	19.85	13.00	21.00	15.05	13.00
15P	20.85	14.00	22.00	16.05	14.00
16P	21.85	15.00	23.00	17.05	15.00
17P	22.85	16.00	24.00	18.05	16.00
18P	23.85	17.00	25.00	19.05	17.00
19P	24.85	18.00	26.00	20.05	18.00
20P	25.85	19.00	27.00	21.05	19.00
21P	26.85	20.00	28.00	22.05	20.00
22P	27.85	21.00	29.00	23.05	21.00
23P	28.85	22.00	30.00	24.05	22.00
24P	29.85	23.00	31.00	25.05	23.00
25P	30.85	24.00	32.00	26.05	24.00
26P	31.85	25.00	33.00	27.05	25.00
27P	32.85	26.00	34.00	28.05	26.00
28P	33.85	27.00	35.00	29.05	27.00
29P	34.85	28.00	36.00	30.05	28.00
30P	35.85	29.00	37.00	31.05	29.00
31P	36.85	30.00	38.00	32.05	30.00
32P	37.85	31.00	39.00	33.05	31.00
33P	38.85	32.00	40.00	34.05	32.00
34P	39.85	33.00	41.00	35.05	33.00

The All Numbers Tooled Already

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

18923

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY


CYP

REV.

CO

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

.XX ±0.25

UNIT
mm△ CO
NO. REV.NEW RELEASE
REVISIONSHZF
CHK10/03/2018
DATE