

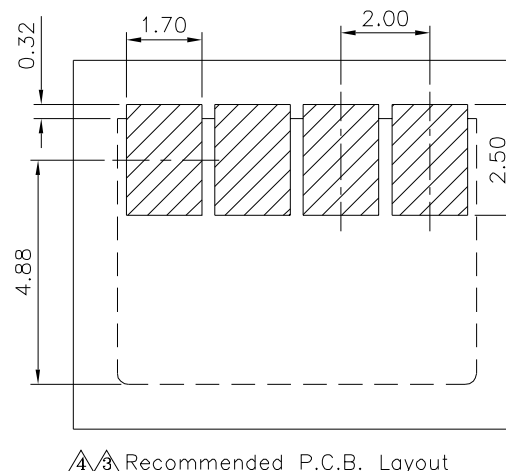
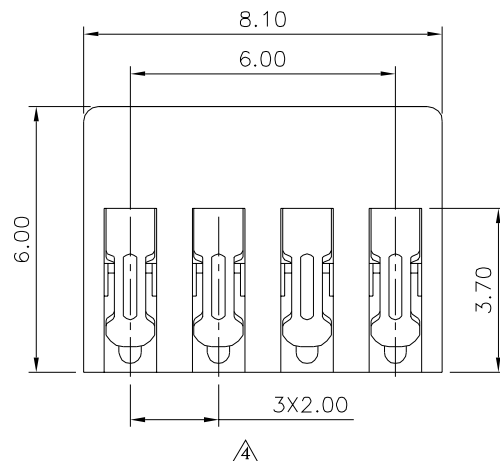
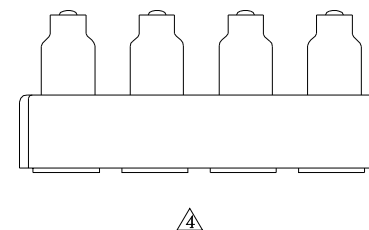


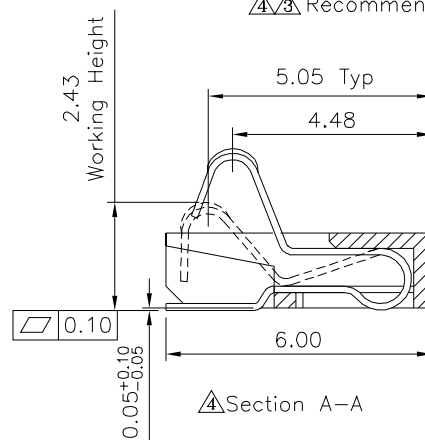

4x3x2x1 SPECIFICATION

- General Characteristics**
2.0mm Battery Connector 04P Female SMT 180°
Contact Height=1.5mm Without Post 1000 PCS/Reel
- Material&Finish**
Insulator:LCP(UL94V-0),Black
Contact:Phosphor Bronze,Gold Plated Over Nickel
- Electrical Characteristics**
Current Rating:2.0A Min.
Voltage Rating:250V AC Min.
Contact Resistance:30 Milliohms Max.
Insulation Resistance:500 Megaohms Min.
Withstand Voltage:500V AC For 1 Minute Min.
- Mechanical Characteristics**
Durability:5000 Cycles
Normal Force At Mated Position:80g Min.
- Environmental Characteristics**
Operation Temperature:-55°C~+125°C
Product Withstand Reflow Soldering 260°C For 10s
- RoHS Compliant**

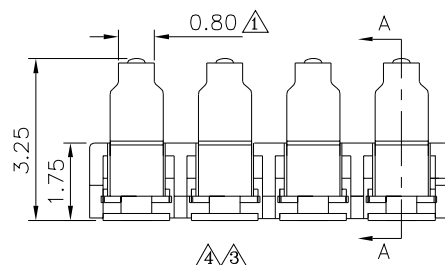

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. 19035

19035

SCALE NONE

APPROVED BY MEI


CHECKED BY HZF

DRAWING BY CYP

REV. A4

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
4x3 .X ±0.25
.XX ±0.20
ANG. ±3°

UNIT
mm



4x3	A4	Modify Data	HZF	08/02/2016
4x3	A3	Modify Data	HZF	07/06/2016
4x3	A2	Modify Data	HZF	06/19/2013
4x3	A1	Modify Data	HZF	04/25/2013
4x3	A0	NEW RELEASE	HZF	07/25/2007
NO.	REV.	REVISIONS	CHK	DATE