
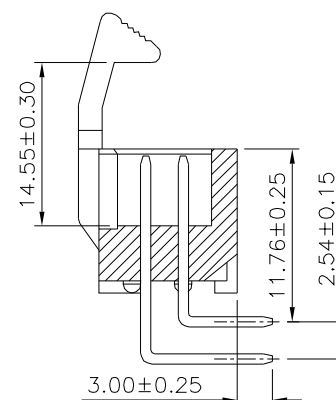
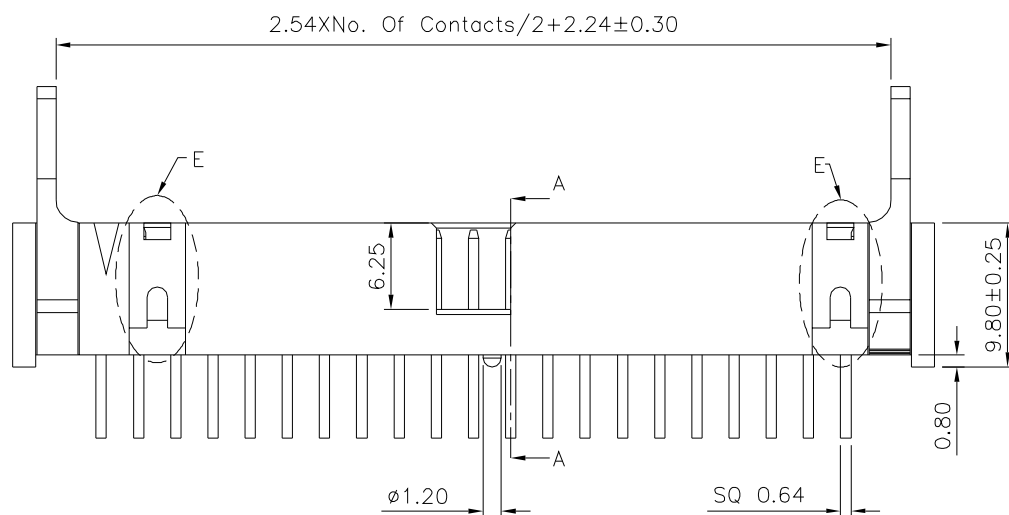


Recommended PCB Layout(Top Side)
(PCB Board Tolerance ± 0.05)

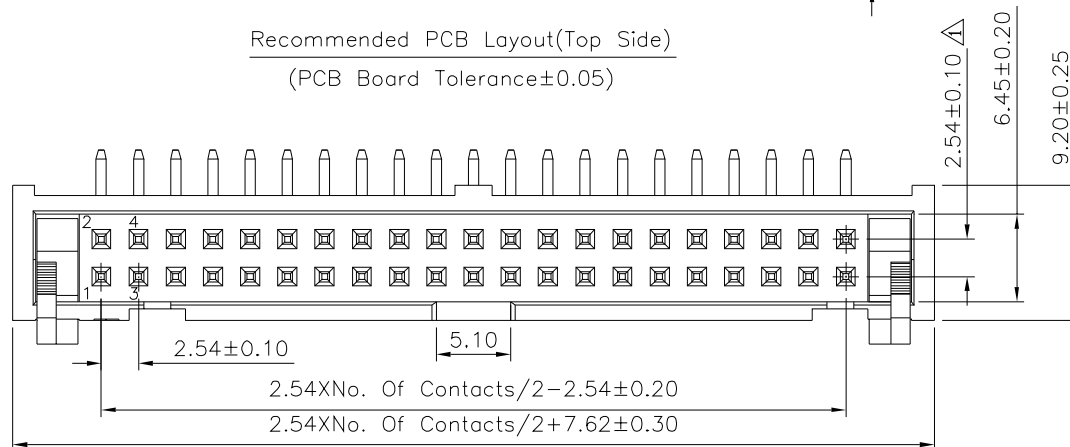

Section A-A

△ SPECIFICATION

Current Rating:3.0 Amp
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Withstand Voltage:1000V AC/DC
Operation Temperature:-40°C~+105°C
Contact:Brass

Gold Flash Over All,Over Nickel

Latch:Zinc Alloy,Nickel Plated
Insulator:PBT+30%G.F.(UL94V-0),Black

△ Above 20 Poles With "E" Profile
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. 19063

19063

SCALE NONE

APPROVED BY EMILY

CHECKED BY HZF

DRAWING BY YBL

REV. A4

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
.X ± 0.40
.XX ± 0.25
.XXX ± 0.15
ANG. $\pm 3^\circ$

UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
4	A4	Modify Data	HZF	01/06/2014
3	A3	Modify Data	HZF	05/14/2012
2	A2	Modify Data	HZF	07/28/2009
1	A1	Modify Data	HZF	07/03/2009
0	A0	NEW RELEASE	HZF	11/06/2007