
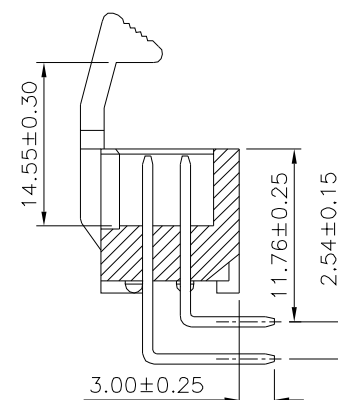
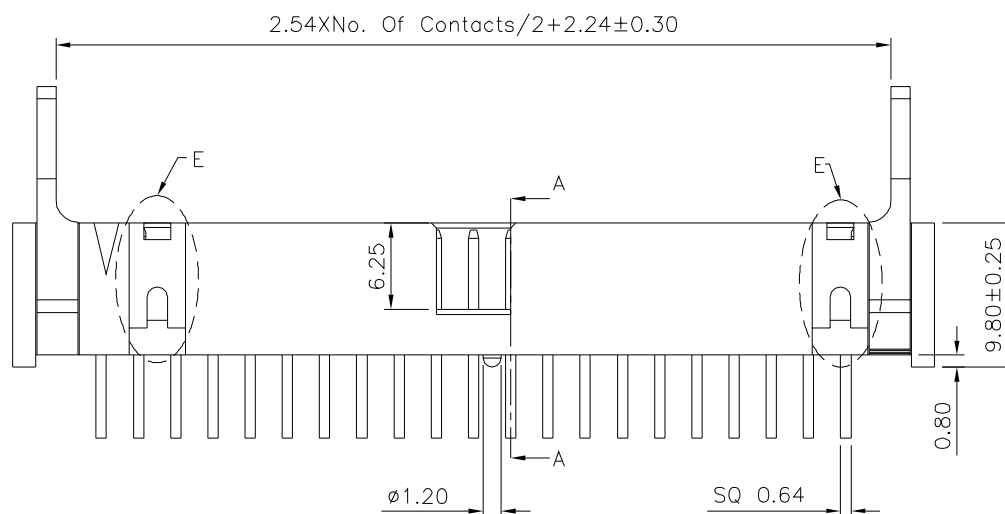


Recommended PCB Layout(Top Side)
(PCB Board Tolerance ± 0.05)

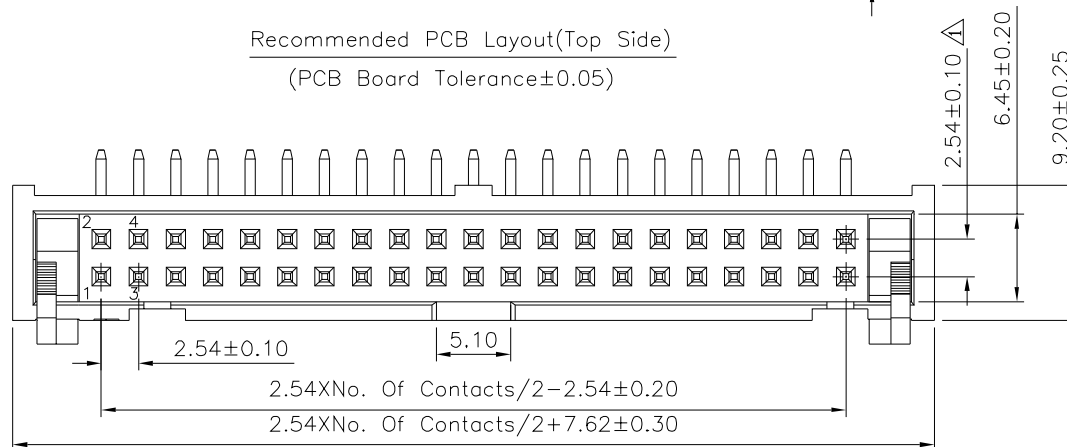

Section A-A

△ SPECIFICATION

Current Rating:3.0 Amp
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Withstand Voltage:1000V AC/DC
Operation Temperature:-40°C~+105°C
Contact:Brass

Gold Flash Over All,Over Nickel

Latch:Zinc Alloy,Nickel Plated
Insulator:PBT+30%G.F.(UL94V-0),Black

△ Above 20 Poles With "E" Profile
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.


DRAWING No. △△

19066

APPROVED BY
EMILY
CHECKED BY
HZF
DRAWING BY
YBL

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
.X ± 0.40
.XX ± 0.25
.XXX ± 0.15
ANG. $\pm 3^\circ$

UNIT
mm



NO.	REV.	REVISIONS	CHK	DATE
△4	A4	Modify Data	HZF	01/06/2014
△3	A3	Modify Data	HZF	05/14/2012
△2	A2	Modify Data	HZF	07/28/2009
△1	A1	Modify Data	HZF	07/03/2009
△0	A0	NEW RELEASE	HZF	11/06/2007