
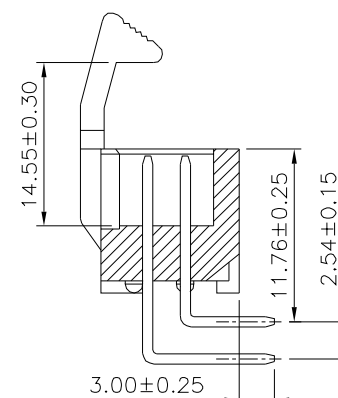
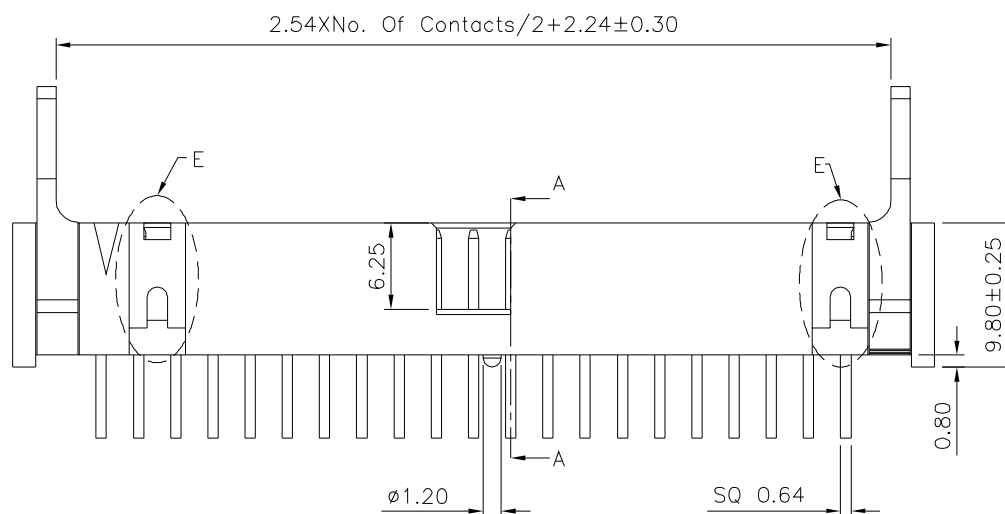


Recommended PCB Layout(Top Side)
(PCB Board Tolerance ± 0.05)

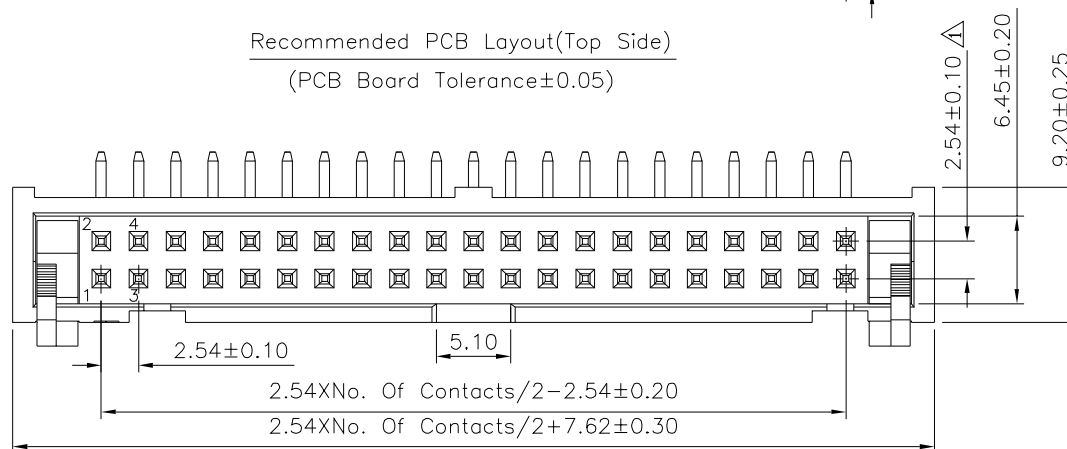

Section A-A

SPECIFICATION

Current Rating:3.0 Amp
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Withstand Voltage:1000V AC/DC
Operation Temperature:-40°C~+105°C
Contact:Brass

Gold Flash Over All,Over Nickel

Latch:Zinc Alloy,Nickel Plated
Insulator:PBT+30%G.F.(UL94V-0),Black

Above 20 Poles With "E" Profile
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. **19068**

19068

SCALE NONE

APPROVED BY EMILY


CHECKED BY HZF

DRAWING BY YBL

REV. A4

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
.X ± 0.40
.XX ± 0.25
.XXX ± 0.15
ANG. $\pm 3^\circ$

UNIT mm



NO.	REV.	REVISIONS	CHK	DATE
4	A4	Modify Data	HZF	01/06/2014
3	A3	Modify Data	HZF	05/14/2012
2	A2	Modify Data	HZF	07/28/2009
1	A1	Modify Data	HZF	07/03/2009
0	A0	NEW RELEASE	HZF	11/06/2007