


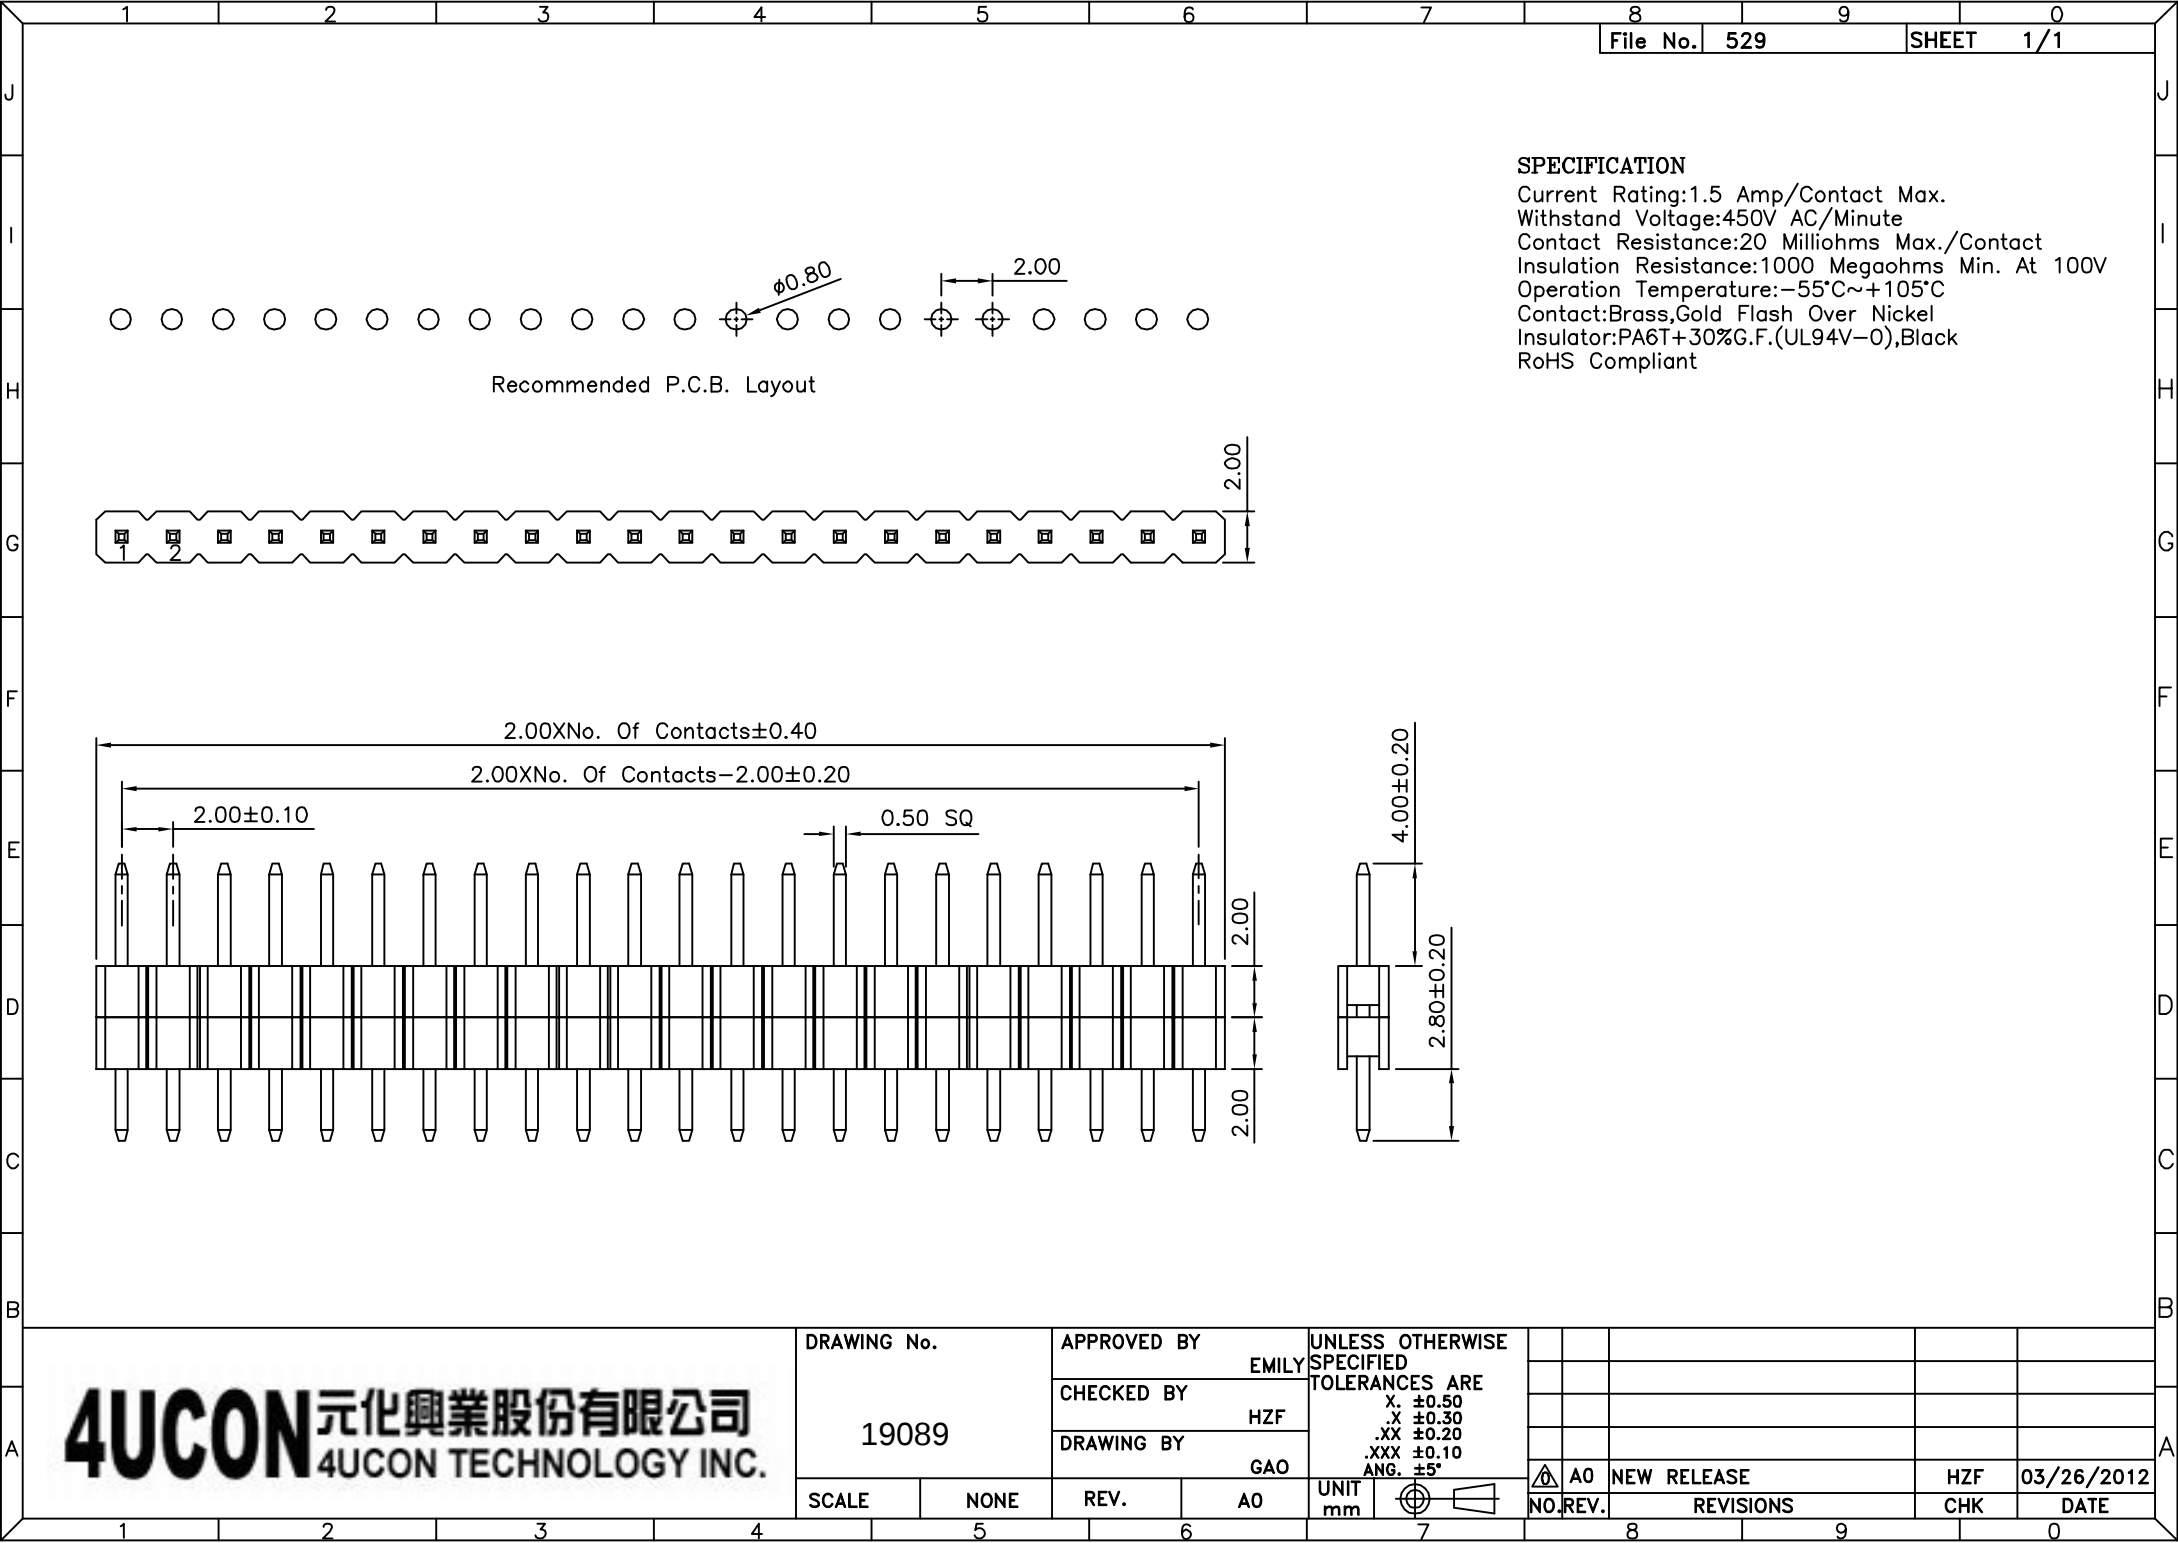

Recommended P.C.B. Layout

SPECIFICATION
Current Rating:1.5 Amp/Contact Max.
Withstand Voltage:450V AC/Minute
Contact Resistance:20 Milliohms Max./Contact
Insulation Resistance:1000 Megaohms Min. At 100V
Operation Temperature:-55°C~+105°C
Contact:Brass,Gold Flash Over Nickel
Insulator:PA6T+30%G.F.(UL94V-O),Black
RoHS Compliant

4UCON元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. 19089		APPROVED BY EMILY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.50 .X ±0.30 .XX ±0.20 .XXX ±0.10 ANG. ±5°						
		CHECKED BY HZF								
		DRAWING BY GAO								
SCALE	NONE	REV.	A0	UNIT mm		 A0	NEW RELEASE		HZF	03/26/2012
						NO. REV.	REVISIONS		CHK	DATE