


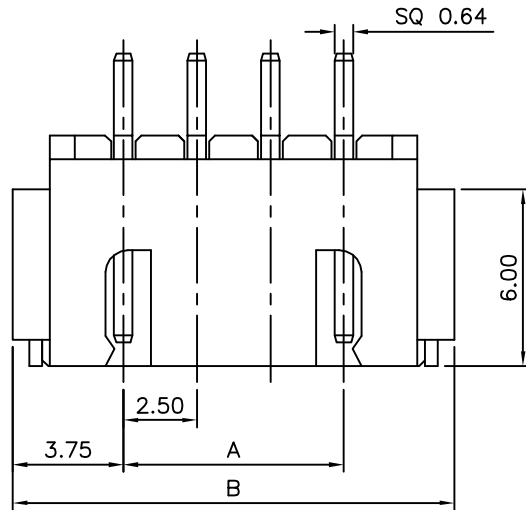




3P~16P

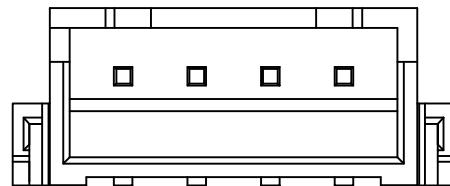

2P

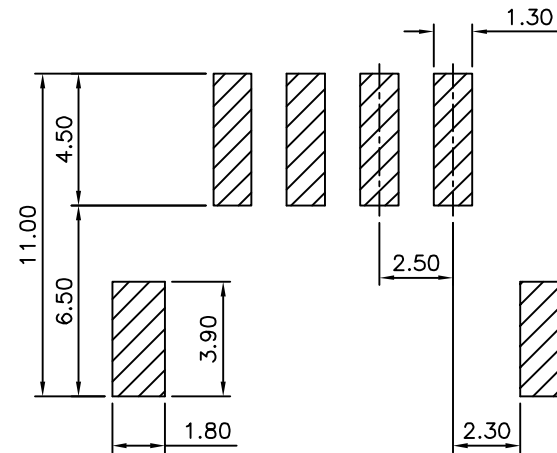

Recommended P.C.B. Layout

SPECIFICATION

Current Rating:3A AC/DC
Voltage Rating:250V AC Max.
Contact Resistance:10 Milliohms Max.
Insulation Resistance:1000 Megohms Min.
Withstanding Voltage:1000V AC/Minute
Operation Temperature:-25°C~+85°C
⚠ Pin:Brass,Gold Flash Over Nickel
Insulator:PA6T,UL94V-0
Solder Tab:Brass,Tin Plated
RoHS Compliant

Pin	A	B
* 2	2.5	10.0
* 3	5.0	12.5
* 4	7.5	15.0
* 5	10.0	17.5
* 6	12.5	20.0
* 7	15.0	22.5
* 8	17.5	25.0
* 9	20.0	27.5
* 10	22.5	30.0
* 11	25.0	32.5
12	27.5	35.0
13	30.0	37.5
14	32.5	40.0
15	35.0	42.5
16	37.5	45.0

The Mark Of "*" Are Toolled Already

DRAWING No.

19274

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

GAO

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

.X ±0.35

.XX ±0.25

ANG.

SCALE

NONE

REV.

A1

UNIT
mm



NO.

REV.

A1 Modify Data

A0 NEW RELEASE

REVISIONS

HZF

HZF

CHK




02/18/2013

10/11/2010

DATE

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

SPECIFICATION
Q'ty:500 PCS/Reel
RoHS Compliant

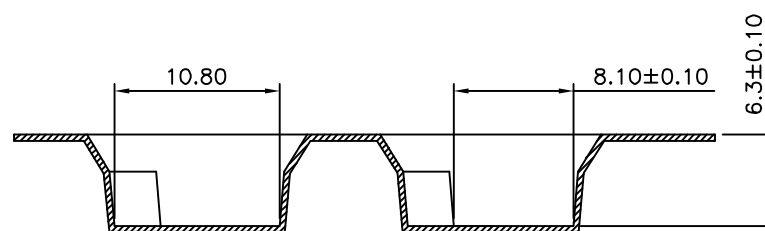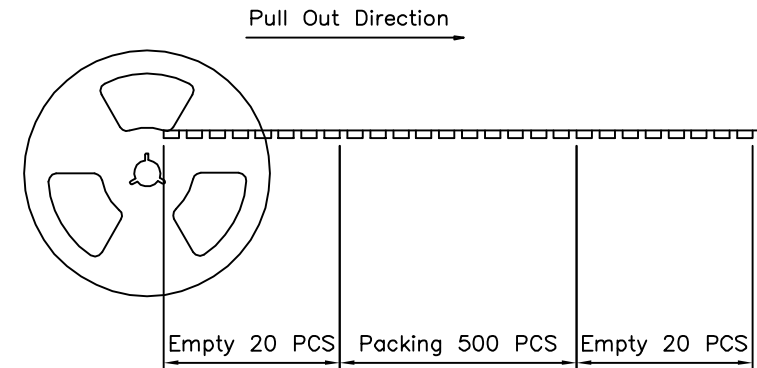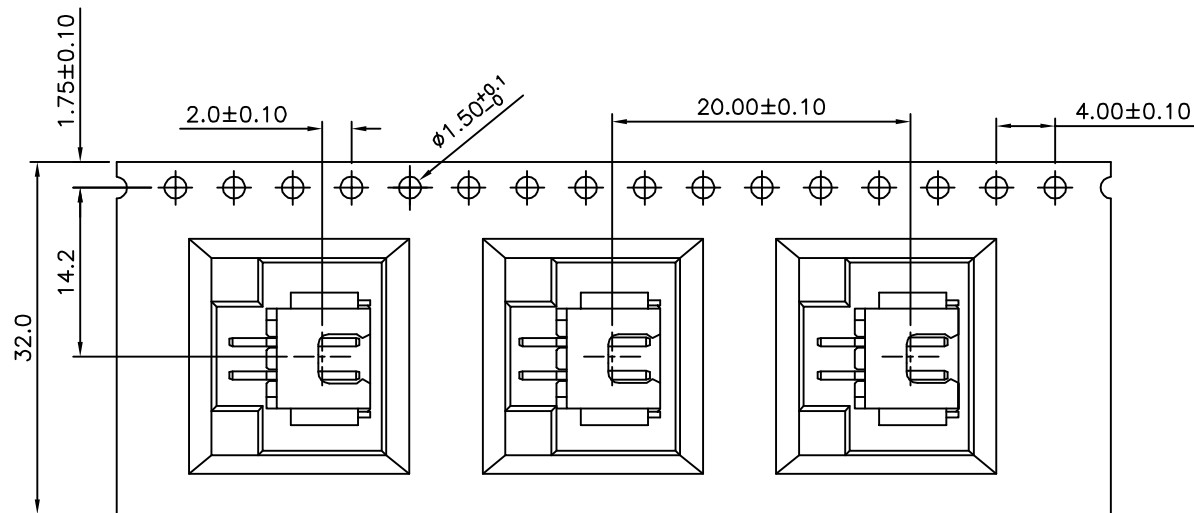

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

19274

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

GAO

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

.X ±0.25

.XX ±0.15


SCALE

NONE

REV.

A1

UNIT
mm



NO.

REV.

REVISIONS

CHK

DATE

△ A1

Modify Data

HZF

02/18/2013

△ A0

NEW RELEASE

HZF

10/11/2010