
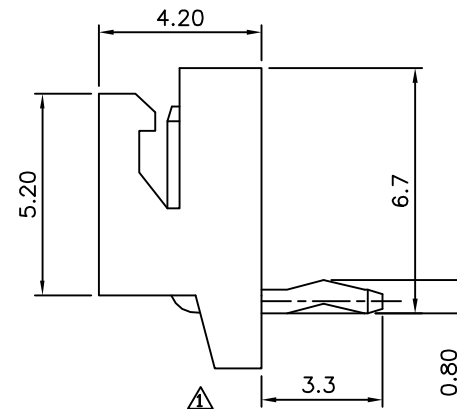
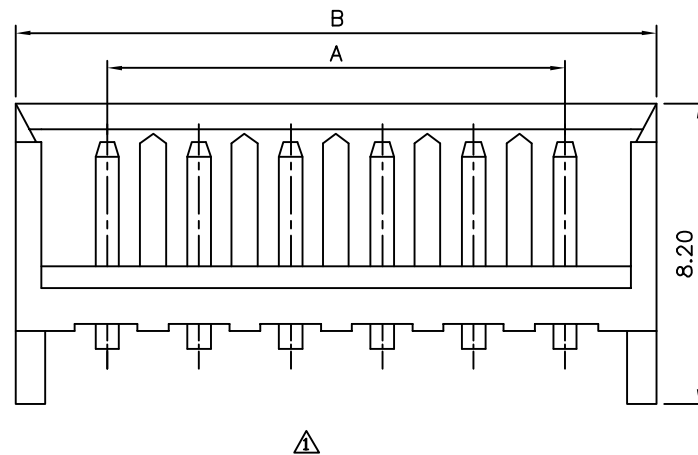


△ Recommended P.C.B. Layout

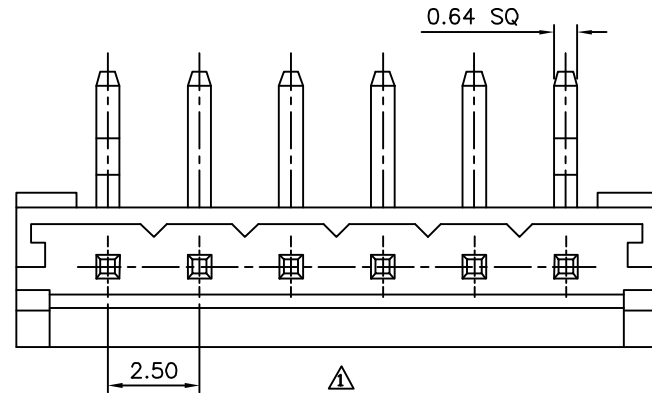

△ SPECIFICATION

Current Rating:3A AC/DC
Voltage Rating:250V AC Max.
Contact Resistance:10 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Temperature Range:-25°C~+85°C
Dielectric Withstanding:800V AC/Minute
Insulator:PA66(UL94V-0)
Contact:Brass,Tin Plated
RoHS Compliant

Pin	A	B
2	2.50	7.50
3	5.00	10.00
4	7.50	12.50
5	10.00	15.00
6	12.50	17.50
7	15.00	20.00
8	17.50	22.50
9	20.00	25.00
10	22.50	27.50
11	25.00	30.00
12	27.50	32.50

DRAWING No.

19572

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

WSS

REV.

A2

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

.X ±0.3
.XX ±0.2 △

UNIT mm



	A2	Delete 13~15 Pin	HZF	05/11/2012
	A1	Modify Data	HZF	03/01/2011
	A0	NEW RELEASE	RAN	
NO.	REV.	REVISIONS	CHK	DATE

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.