

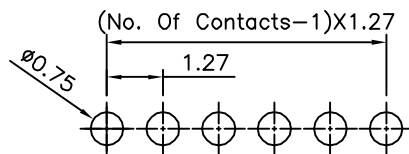
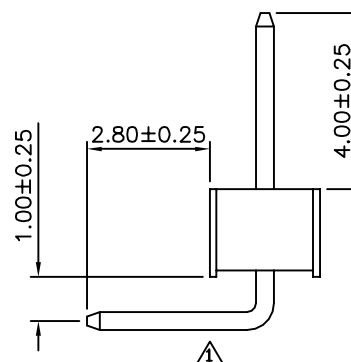


△ SPECIFICATION
 Current Rating: 1A
 Withstand Voltage: 1000V AC For 1 Minute
 Contact Resistance: 20 Milliohms Max.
 Insulation Resistance: 5000 Megaohms Min.
 Operating Temperature: -55°C~+105°C
 Housing: PA6T(UL94V-0), Black
 Contact: Brass, Gold Flash Over Nickel
 No. Of Contacts: 02~50 Contacts
 RoHS Compliant

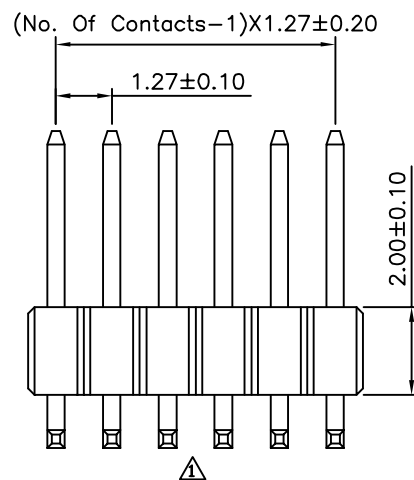

Recommended P.C.B Layout

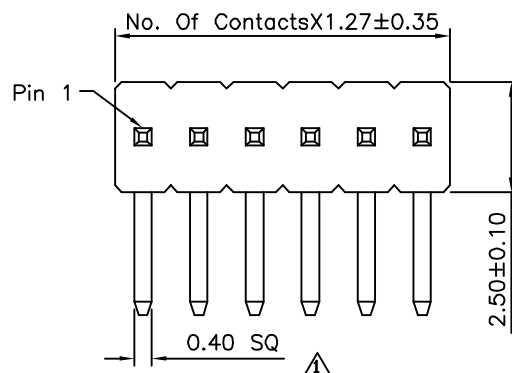

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

19626

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

CYP

REV.

A1

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE

.X ±0.38

.XX ±0.25

ANG ±5°

UNIT
 mm



NO.

REV.

REVISIONS

CHK

DATE

△ A1

Modify Data

HZF

08/26/2015

△ A0

NEW RELEASE

HZF

01/10/2009