
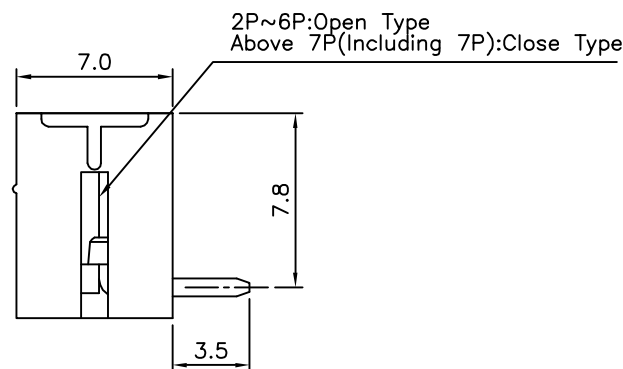
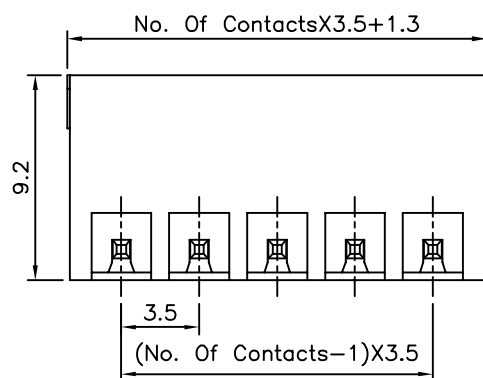


Recommended P.C.B. Layout

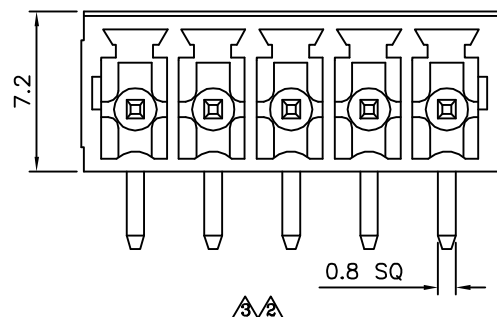

△ SPECIFICATION

Current Rating:12 Amp/Way Max.

Voltage Rating:300V AC

Withstanding Voltage:2500V AC For 1 Minute

Test Time=60 Sec/1 PCS

Operation Temperature:-40°C~+105°C

Soldering Reliability:Test Temperature=250°C±10°C
5 Seconds Max.

△ Insulator Body(Housing):Polyamide+G.F.(UL94V-0),Green
Solder Pin:Copper Alloy,Tin Plated
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

19839

APPROVED BY

EMILY

CHECKED BY

HZF


DRAWING BY

HAO

UNLESS OTHERWISE
SPECIFIED

TOLERANCES ARE
X. ±0.50
.X ±0.30
.XX ±0.20
X* ±1°

UNIT
mm



NO.	REV.	REVISIONS	CHK	DATE
△ A4		Modify Data	HZF	09/04/2015
△ A3		Modify Data	HZF	05/31/2012
△ A2		Modify Data	HZF	11/23/2011
△ A1		Modify Data	HZF	07/30/2010
△ A0		NEW RELEASE	HZF	04/07/2009

SCALE

NONE

REV.

A4