




SPECIFICATION

Current Rating:1 Amp
 Withstand Voltage:500V AC/DC
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operation Temperature:-40°C~+105°C
 Contact:Brass,Gold Plated Over Nickel
 Insulator:PA9T+30%G.F.(UL94V-0),Black
 6~8 Pin No "D" Configuration
 RoHS Compliant

Recommended P.C.B Layout(Top Side) (PCB Board Tolerance±0.05)

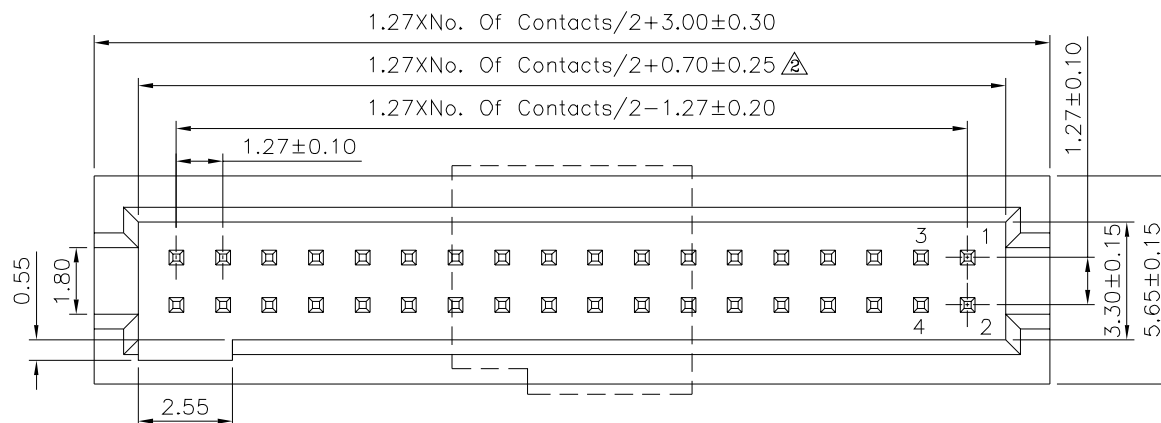

Note:The 16 Pin Numbers Tooled Not Already

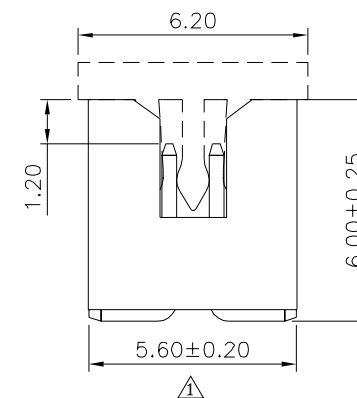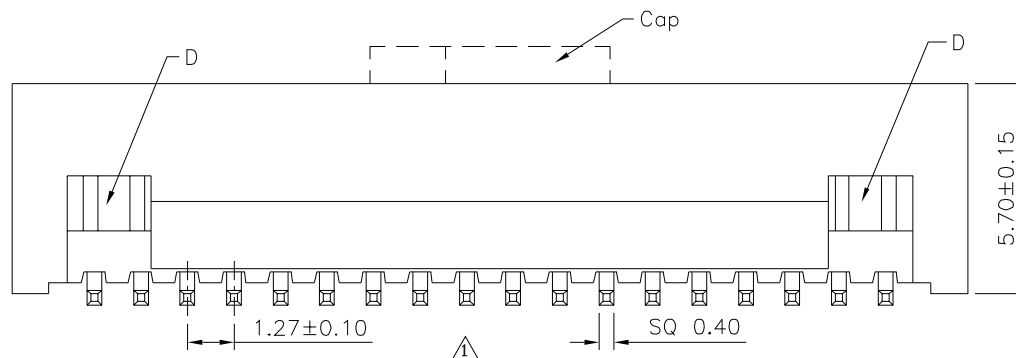

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

19903

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP

REV.

B2

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE
 .X ±0.40
 .XX ±0.25
 .XXX ±0.15
 ANG. ±3°

UNIT
mm



NO.	REV.	REVISIONS	CHK	DATE
$\triangle$	B2	Modify Data	HZF	11/05/2022
$\triangle$	B1	Modify Data	HZF	12/18/2015
$\triangle$	B0	NEW RELEASE	HZF	09/26/2013