


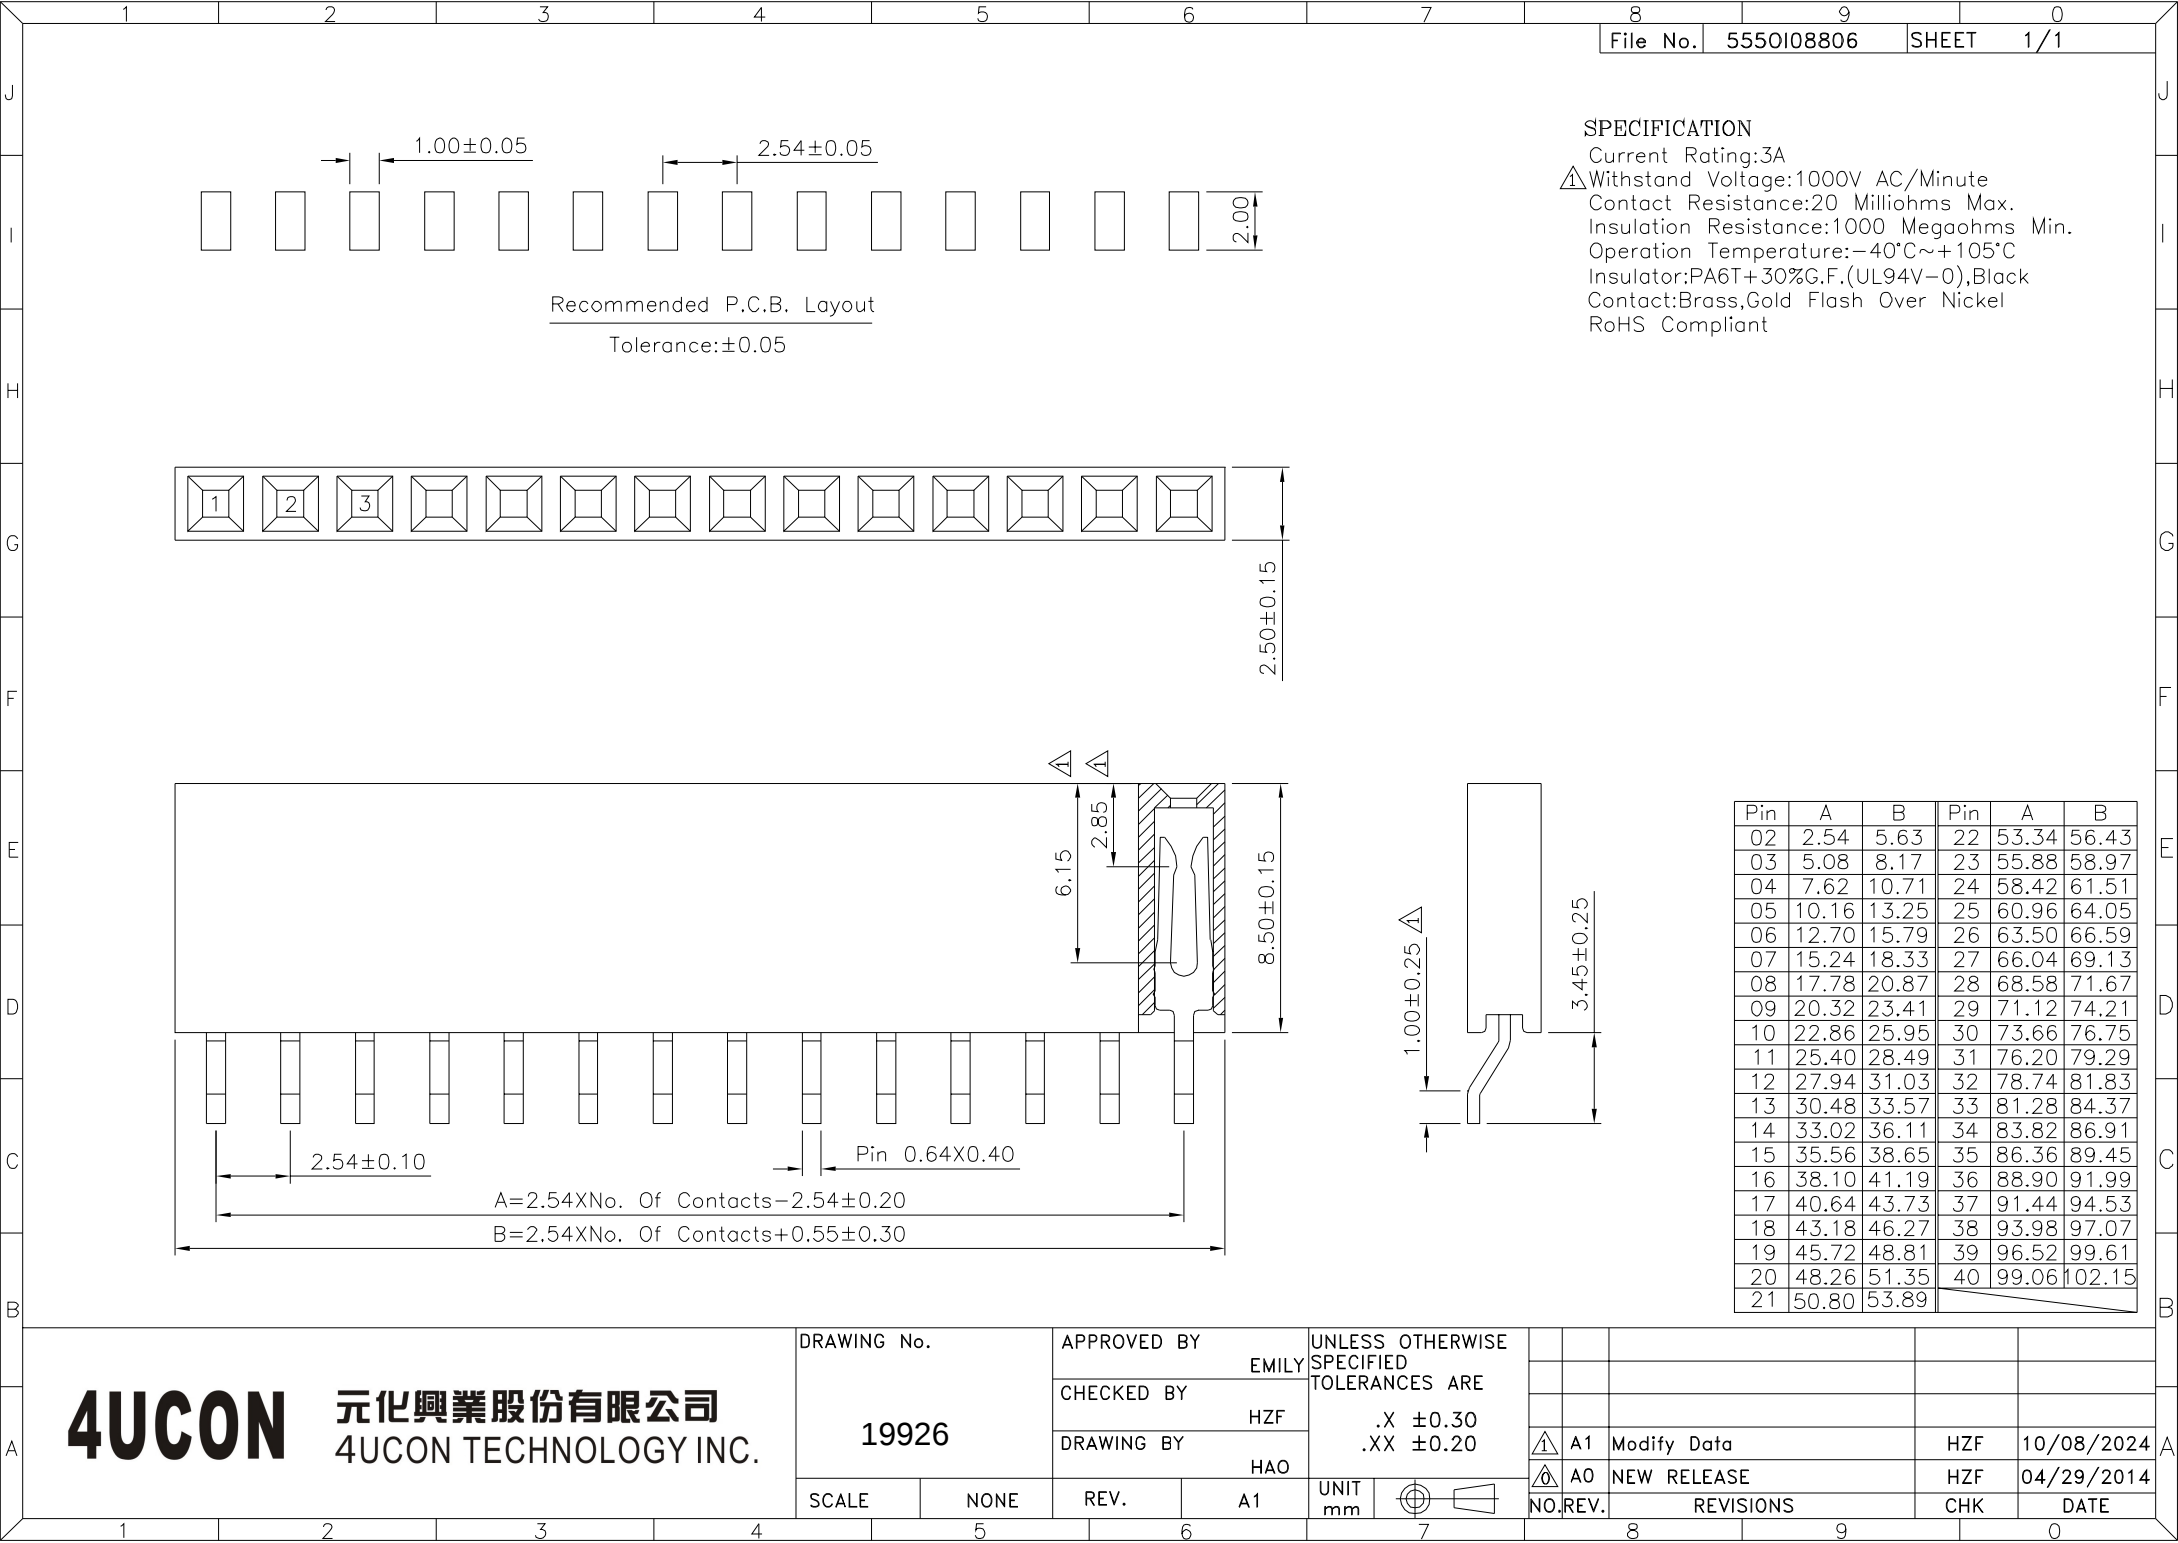

SPECIFICATION

- Current Rating:3A
- Withstand Voltage:1000V AC/Minute
- Contact Resistance:20 Milliohms Max.
- Insulation Resistance:1000 Megaohms Min.
- Operation Temperature:-40°C~+105°C
- Insulator:PA6T+30%G.F.(UL94V-0),Black
- Contact:Brass,Gold Flash Over Nickel
- RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

19926

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

HAO

SCALE

NONE

REV.


A1

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

.X ±0.30

.XX ±0.20

UNIT
mm



NO.

REV.

A1

A0

CHK

DATE

Modify Data

NEW RELEASE

REVISIONS

DATE

HZF

HZF

CHK

DATE

10/08/2024

04/29/2014