

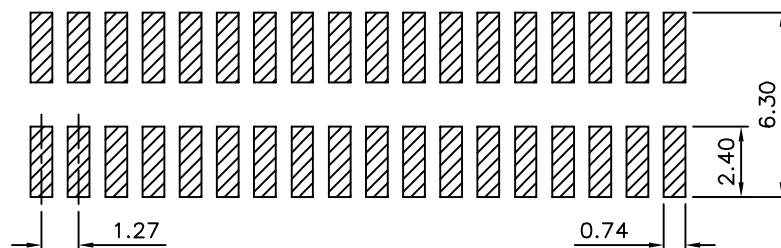
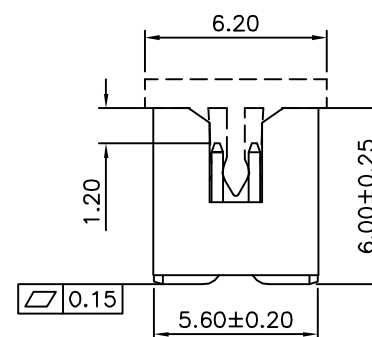


SPECIFICATION

Current Rating:1 Amp
 Withstand Voltage:500V AC/DC
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operation Temperature:-40°C~+105°C
 Contact:Brass,Gold Plated Over Nickel
 Insulator:PA6T+30%G.F.(UL94V-0),Black
 6~8 Pin No "D" Configuration
 RoHS Compliant

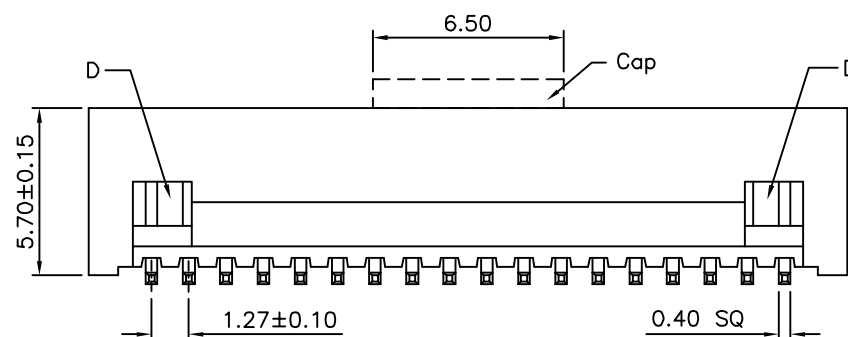

Recommended P.C.B Layout(Top Side)
 (PCB Board Tolerance±0.05)

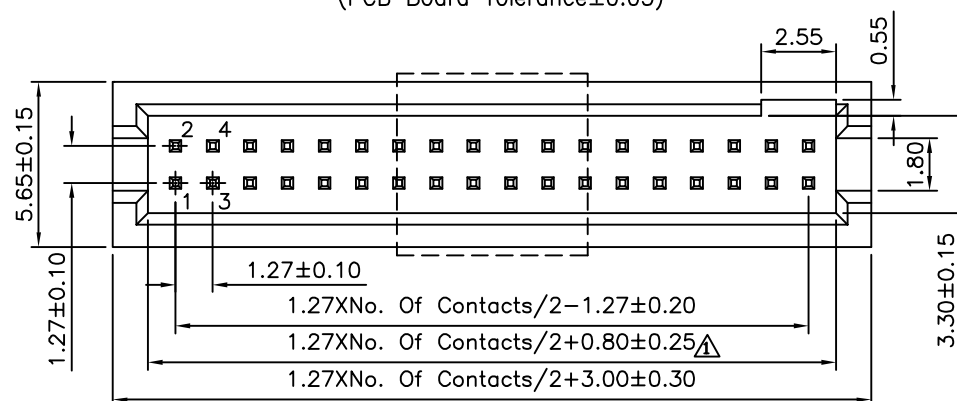

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

19947

SCALE NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

GAO

REV.

A1

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE
 .X ±0.40
 .XX ±0.25
 .XXX ±0.15
 ANG. ±3°




UNIT
 mm



NO.	REV.	REVISIONS	CHK	DATE
△ A1		Modify Data	HZF	08/17/2012
△ A0		NEW RELEASE	HZF	03/15/2010

SPECIFICATION

Reel:13"X32 mm
Carrier Tape:8000X32 mm
With 25.5mm Width Cover Tape
RoHS Compliant

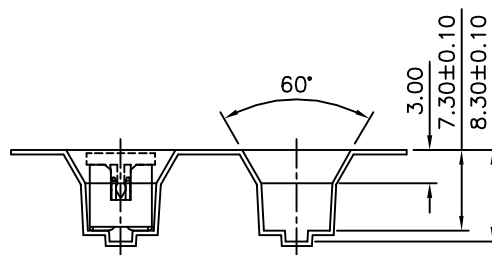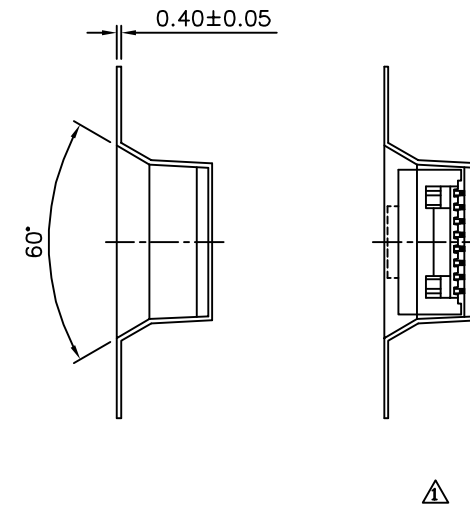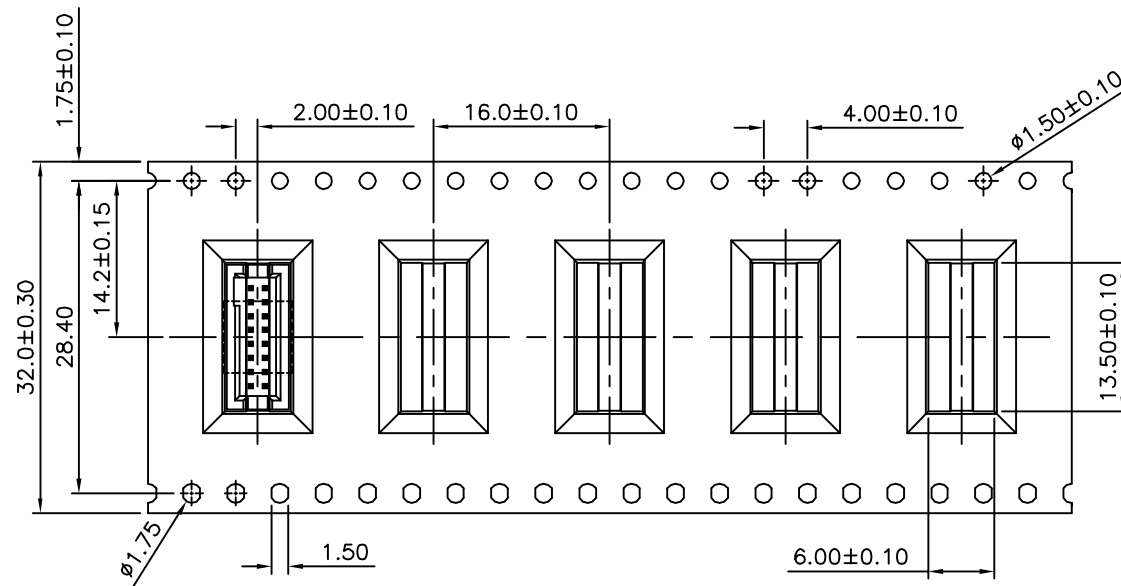

A	Item No.	No. Of Position/Per Row	Q'ty/Reel
	19947	08	450 PCS

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

APPROVED BY	EMILY
-------------	-------

CHECKED BY

DRAWING BY

SCALE	NONE
-------	------

NONE

REV.

A1

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
.X	±0.20
.XX	±0.10
.XXX	±0.05
ANG.	±2°

UNIT	mm	
------	----	---

$\triangle 1$	A1
---------------	----

1	Modify Data
---	-------------

	A0
--	----

0	NEW RELEASE
---	-------------

HZF

08/17/2012	
------------	--

HZF

03/15/2010

NO.	REV.
-----	------

REVISIONS

CHK

	DATE
--	------