

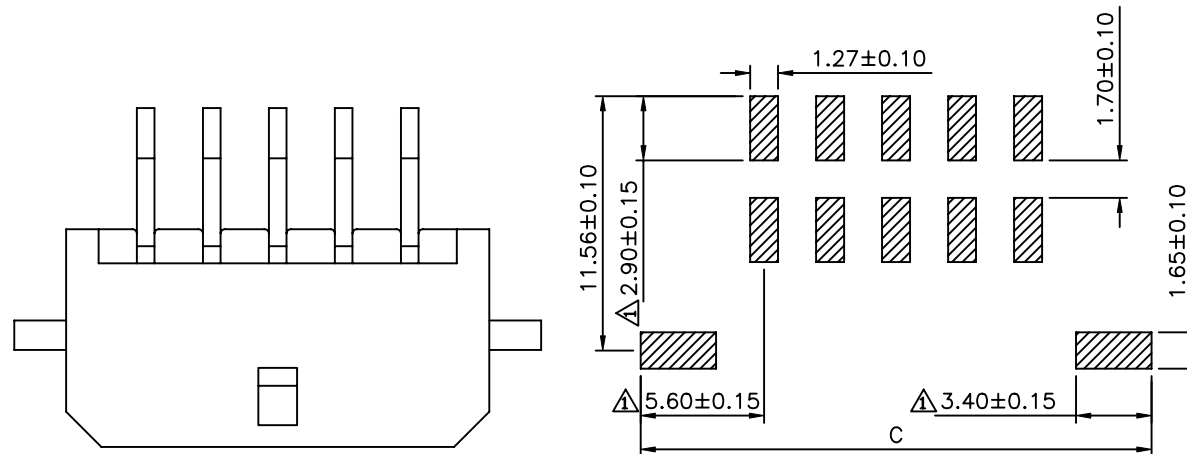


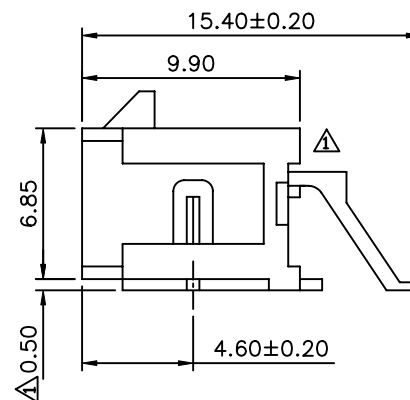

Recommended P.C.B. Layout

- △ SPECIFICATION**
- 1.General Characteristics**
3.0mm Micro Fit 2XXX SMT 90° Wafer Shell Tap:SMT
 - 2.Material&Finish**
Pin:Brass,Matte-Tin Plated
Base:LCP UL94V-0,Black
 - 3.Electrical Characteristics**
Current Rating:5A AC/DC
Voltage Rating:250V AC/DC
Insulation Resistance:1000 Megaohms Min.
Withstanding Voltage:1500V AC/Minute
 - 4.RoHS Compliant**

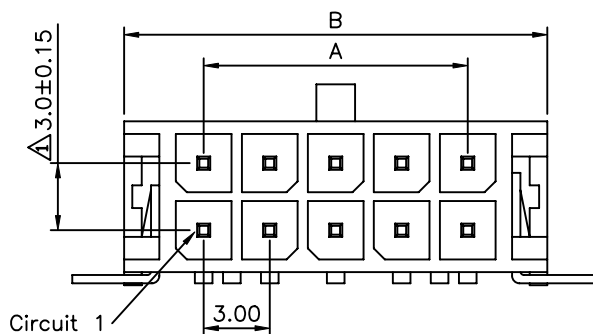

Circuit	A	B	C
2		6.70	11.20
4	3.00	9.70	14.20
6	6.00	12.70	17.20
8	9.00	15.70	20.20
10	12.00	18.70	23.20
12	15.00	21.70	26.20
14	18.00	24.70	29.20
16	21.00	27.70	32.20
18	24.00	30.70	35.20
20	27.00	33.70	38.20
22	30.00	36.70	41.20
24	33.00	39.70	44.20

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

19997

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

WZL

UNLESS OTHERWISE SPECIFIED

TOLERANCES ARE
.X ±0.50
.XX ±0.25
.XXX ±0.10
ANG: ±2°

SCALE

NONE

REV.

A1

UNIT

mm



NO.

REV.

REVISIONS

CHK

DATE

△ A1

Modify Data

HZF


12/25/2009

△ A0

NEW RELEASE

HZF

11/28/2007

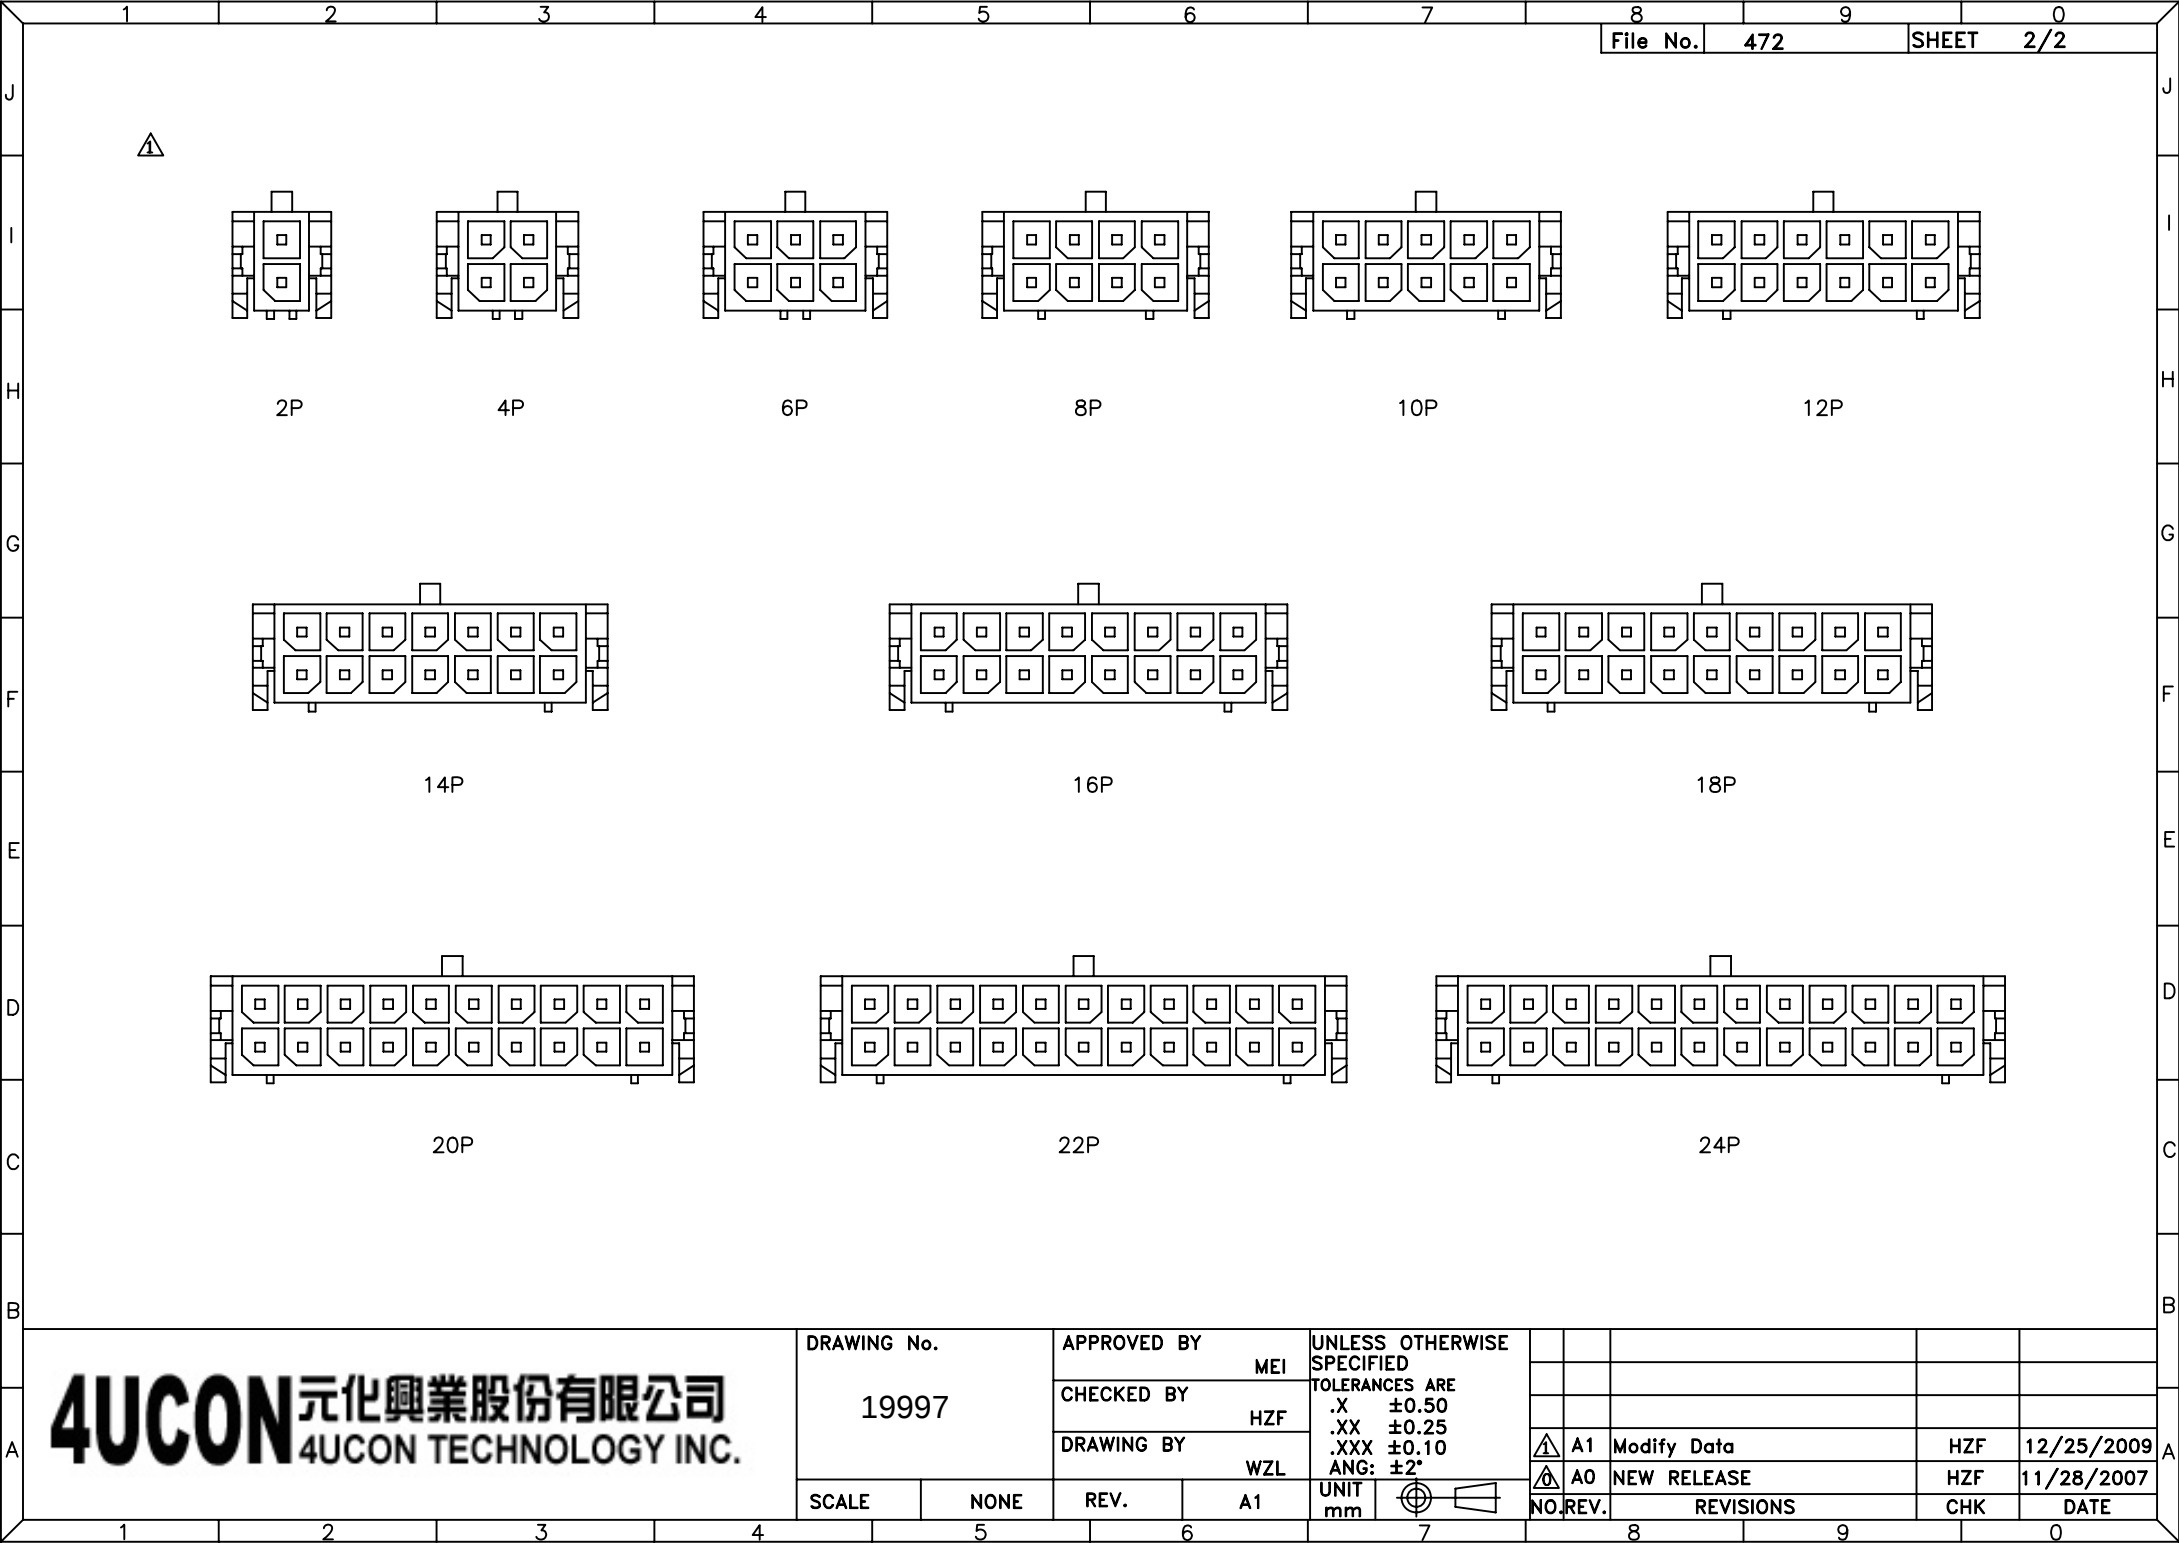

2P

4P

6P

8P

10P

12P

14P

16P

18P

20P

22P

24P

4UCON元化興業股份有限公司

4UCON TECHNOLOGY INC.

DRAWING No.

19997

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

WZL

SCALE

NONE

REV.

A1

UNLESS OTHERWISE SPECIFIED

TOLERANCES ARE


.X ±0.50

.XX ±0.25

.XXX ±0.10

ANG: ±2°

UNIT
mm



A1

Modify Data

HZF

12/25/2009



A0

NEW RELEASE

HZF

11/28/2007

NO. REV.

REVISIONS

CHK

DATE