

## SPECIFICATION

Rated Voltage And Current:1.5A At 250V AC Min.

Dielectric Withstanding Voltage:

750V AC RMS For 1 Minute(Rev. 1.1)

Contact Resistance:30 Milliohms Max.

Insulation Resistance:




1000 Megaohms Min. At 500V DC

Insertion Force:35N Max.


Extraction Force:10N Min.

Durability(Life Test):1500 Cycles

RoHS Compliant

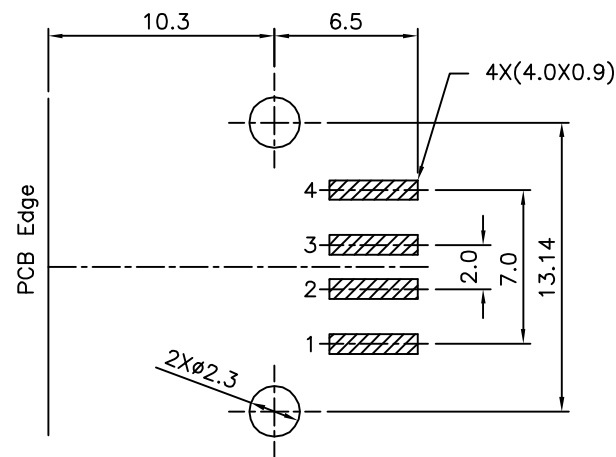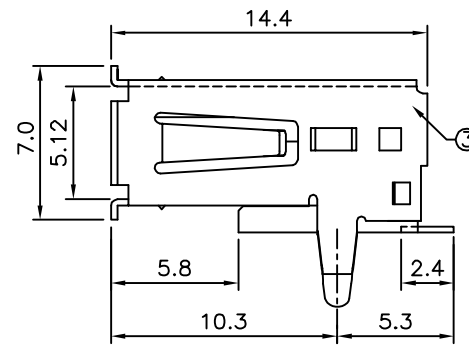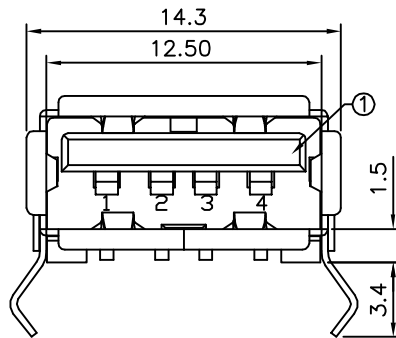

Recommended P.C.B. Layout(Bottom View)

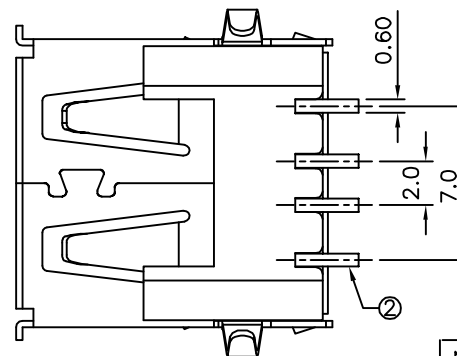

| No. | Description | Q'ty | Material        | Remark                                                                   |
|-----|-------------|------|-----------------|--------------------------------------------------------------------------|
| ①   | Housing     | 1    | PA9T+G.F.       | 20082:White<br>20057:Black                                               |
| ②   | Terminal    | 4    | Phosphor Bronze | Gold Plated On Contact<br>Area,Tin Plated On Solder<br>Tails,Over Nickel |
| ③   | Shell       | 1    | Brass           | Nickel Plated                                                            |

**4UCON** 元化興業股份有限公司  
4UCON TECHNOLOGY INC.

DRAWING No.

20082

APPROVED BY

MEI


CHECKED BY

HZF

DRAWING BY

CYP

UNLESS OTHERWISE  
SPECIFIED  
TOLERANCES ARE  
X. ±0.38  
.X ±0.25  
.XX ±0.13  
.XXX ±0.05

UNIT  
mm

A1

Modify Data

HZF

03/30/2016

A0

NEW RELEASE

HZF

07/18/2010

NO.REV.

REVISIONS

CHK

DATE