


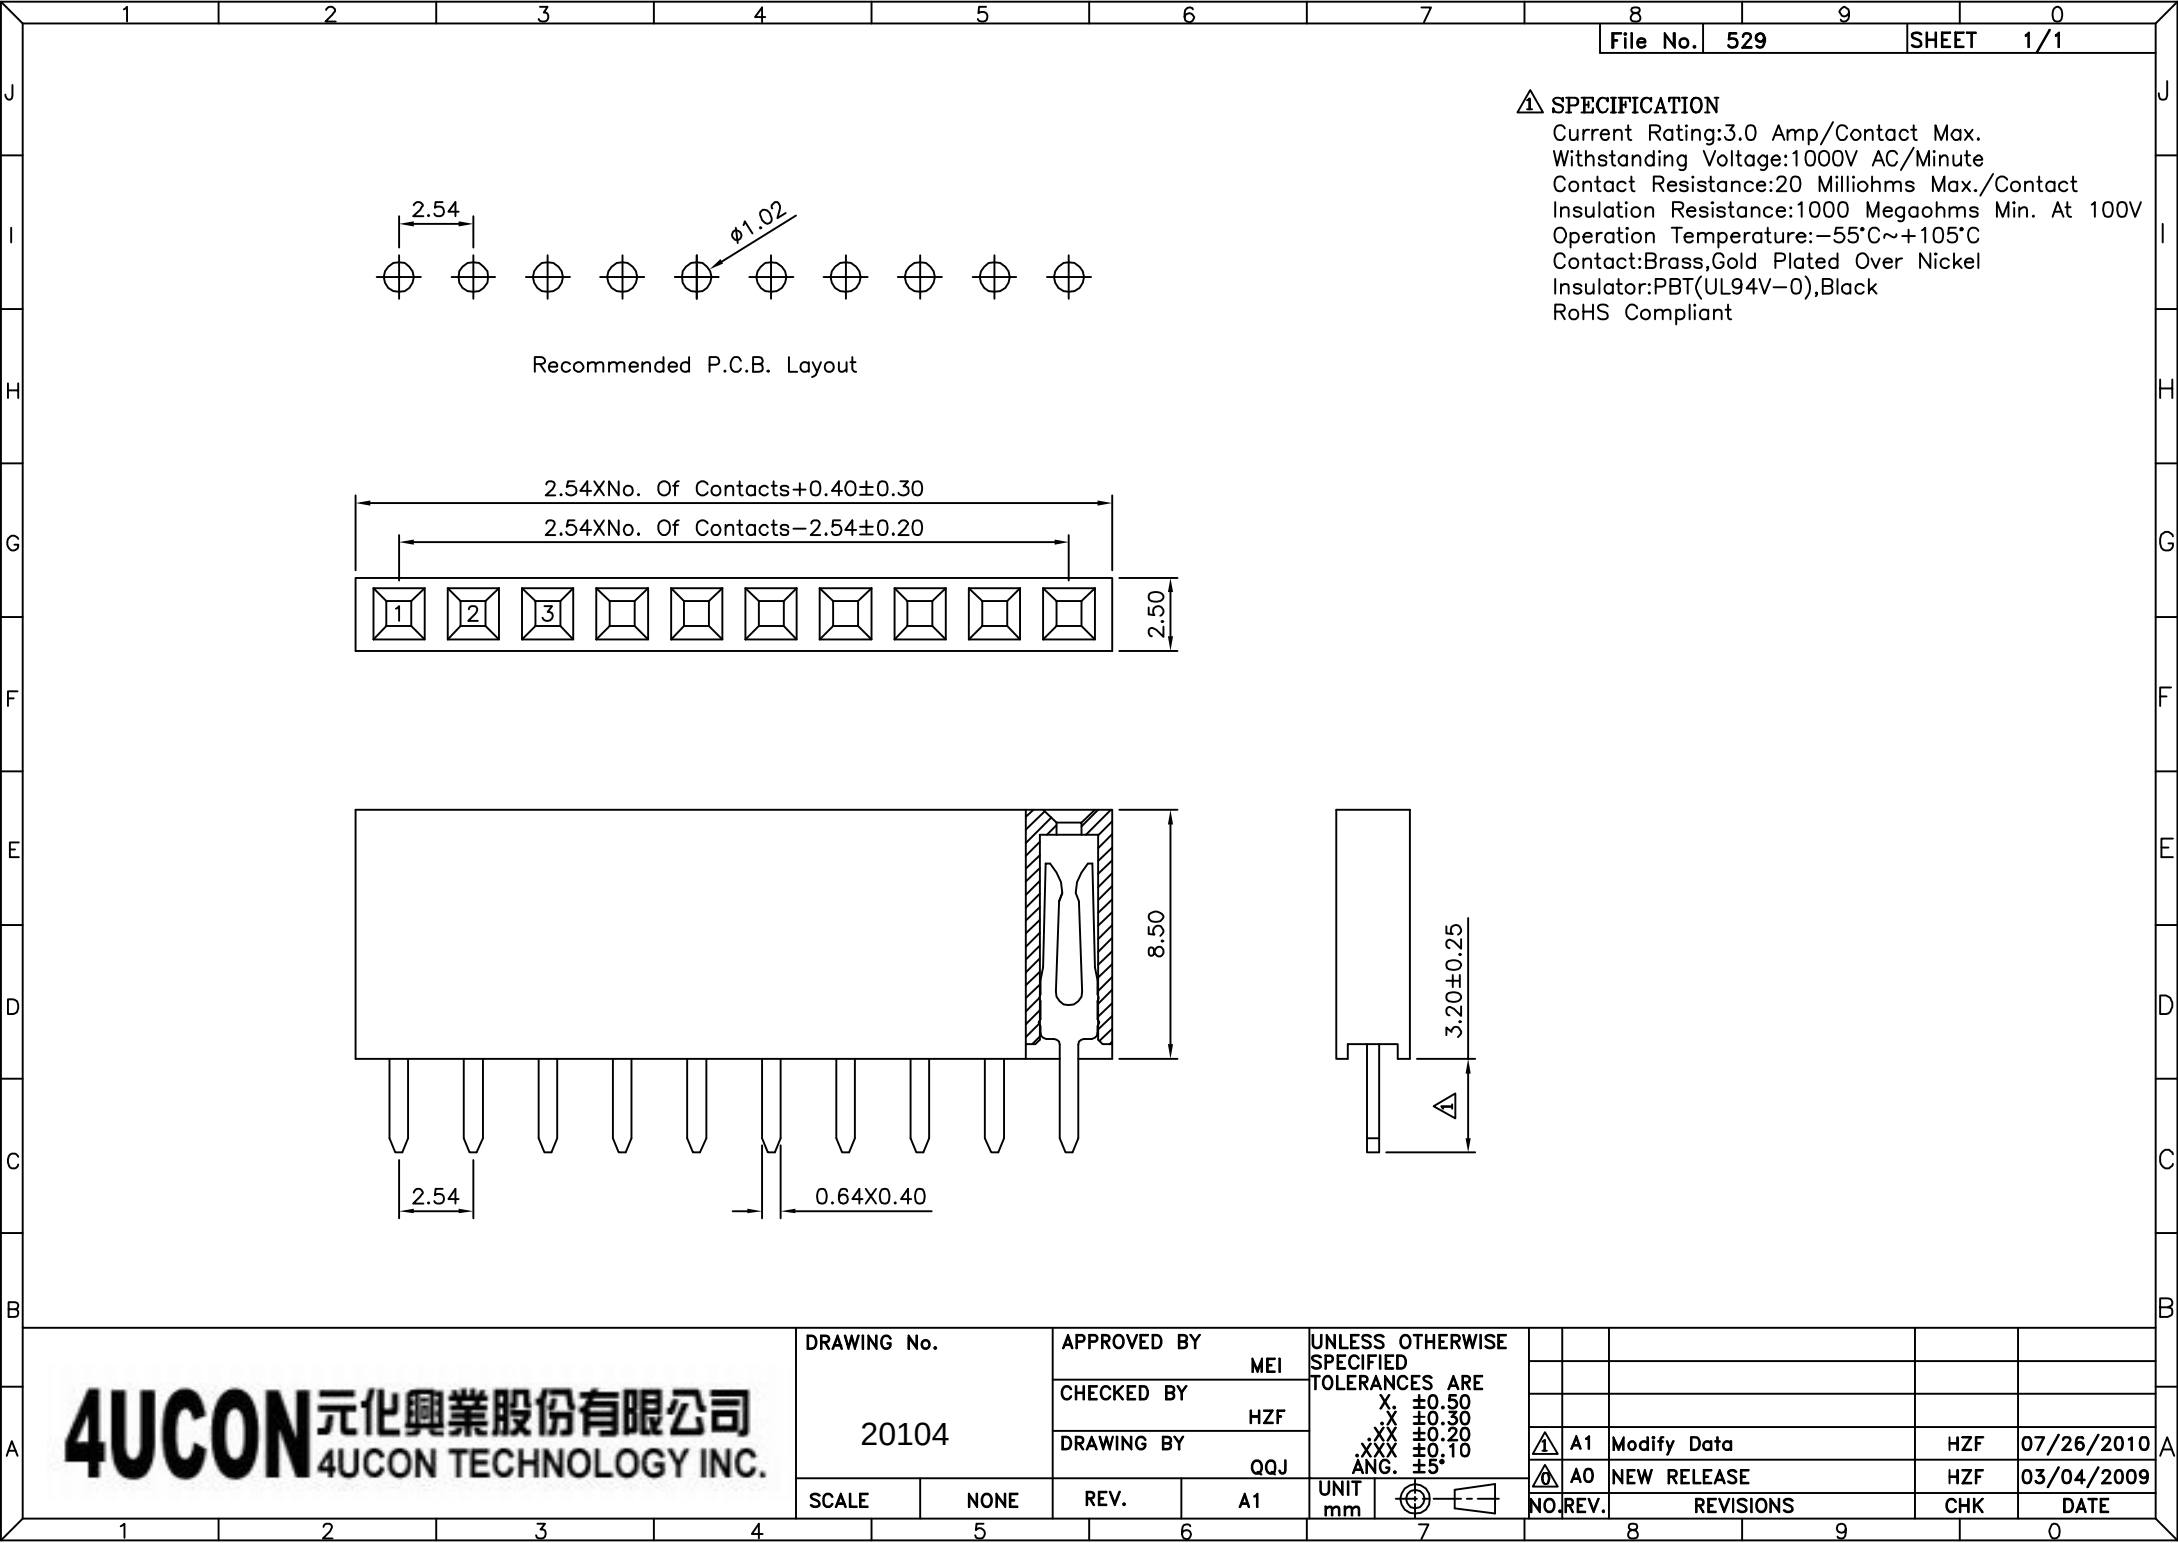

△ SPECIFICATION
Current Rating:3.0 Amp/Contact Max.
Withstanding Voltage:1000V AC/Minute
Contact Resistance:20 Milliohms Max./Contact
Insulation Resistance:1000 Megaohms Min. At 100V
Operation Temperature:-55°C~+105°C
Contact:Brass,Gold Plated Over Nickel
Insulator:PBT(UL94V-0),Black
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. 20104		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.50 XX ±0.30 XXX ±0.20 ANG. ±0.10 ANG. ±5°	
		MEI			
		CHECKED BY			
		HZF			
		DRAWING BY			
		QQJ			
SCALE	NONE	REV.	A1	UNIT mm	

NO.	REV.	REVISIONS	CHK	DATE
△ A1		Modify Data	HZF	07/26/2010
△ A0		NEW RELEASE	HZF	03/04/2009