



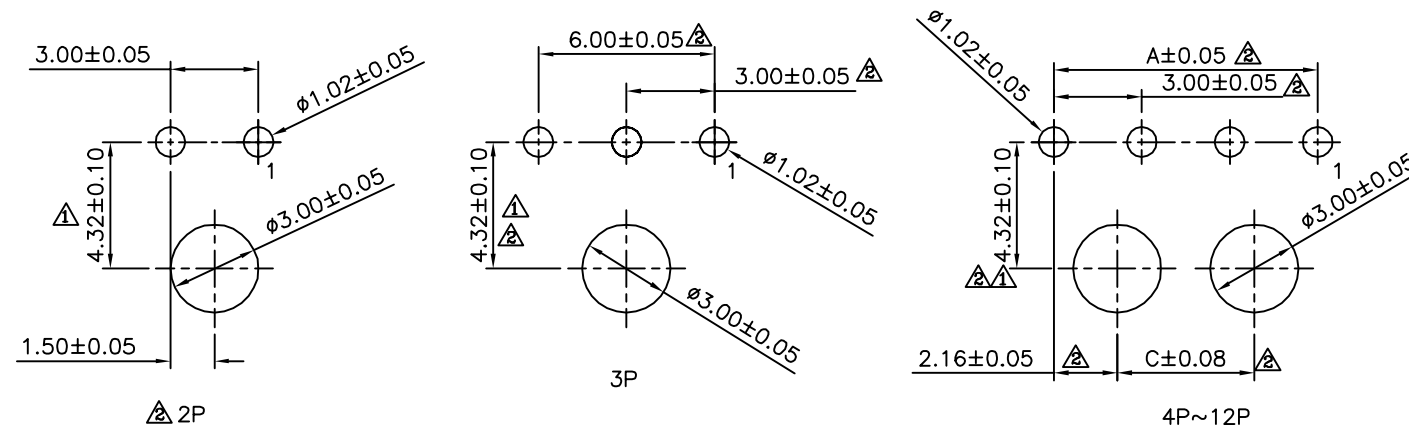

Recommended P.C.B. Layout

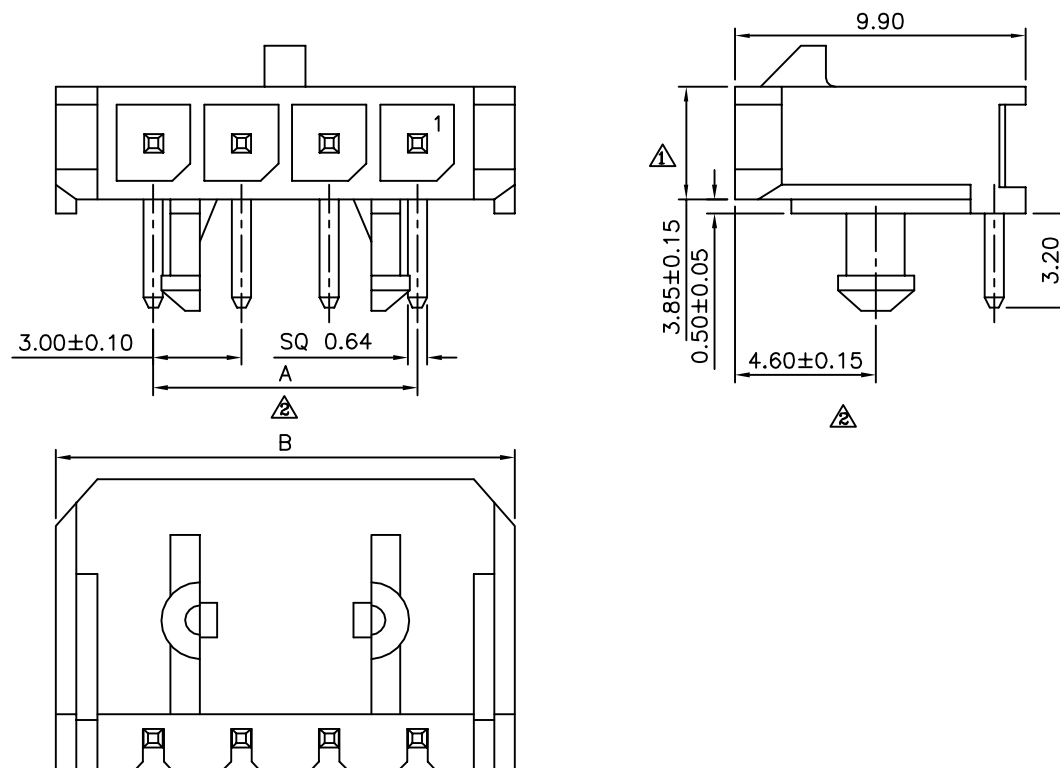

SPECIFICATION

1.General Characteristics

3.0mm Micro Fit 1XXX DIP 90° Male With Post

2.Material&Finish

Insulator:PBT+30%G.F.(UL94V-0),Black

Contact:Brass,Tin Plated

3.Electrical Characteristics

Current Rating:5A AC/DC

Voltage Rating:250V AC/DC

Withstand Voltage:1500V AC For 1 Minute

Contact Resistance:10 Milliohms Max.

Insulation Resistance:1000 Megaohms Min.

4.Environmental Characteristics

Operation Temperature Range:-25°C~+85°C

5.RoHS Compliant

MIF	1	X	XX	P	RP	-	H
(1)	(2)	(3)	(4)	(5)	(6)		

(1) MIF:3.0mm Micro Fit

(2) 1:Single Row

(3) XX:No. Of Position/Per Row

(4) P:Male

(5) RP:DIP Right Angle With Post

(6) H:RoHS Compliant

Pin	A	B	C
1	-	6.65	-
2	3.00	9.65	-
3	6.00	12.65	-
4	9.00	15.65	4.70
5	12.00	18.65	7.70
6	15.00	21.65	10.70
7	18.00	24.65	13.70
8	21.00	27.65	16.70
9	24.00	30.65	19.70
10	27.00	33.65	22.70
11	30.00	36.65	25.70
12	33.00	39.65	28.70

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

20144

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY


WSS

REV.

A2

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE.X ± 0.50 .XX ± 0.25 .XXX ± 0.10 ANG. $\pm 2^\circ$ UNIT
mm

NO.	REV.	REVISIONS	CHK	DATE
A2		Modify Data	HZF	06/21/2011
A1		Modify Data	HZF	08/02/2008
A0		NEW RELEASE	HZF	11/14/2007

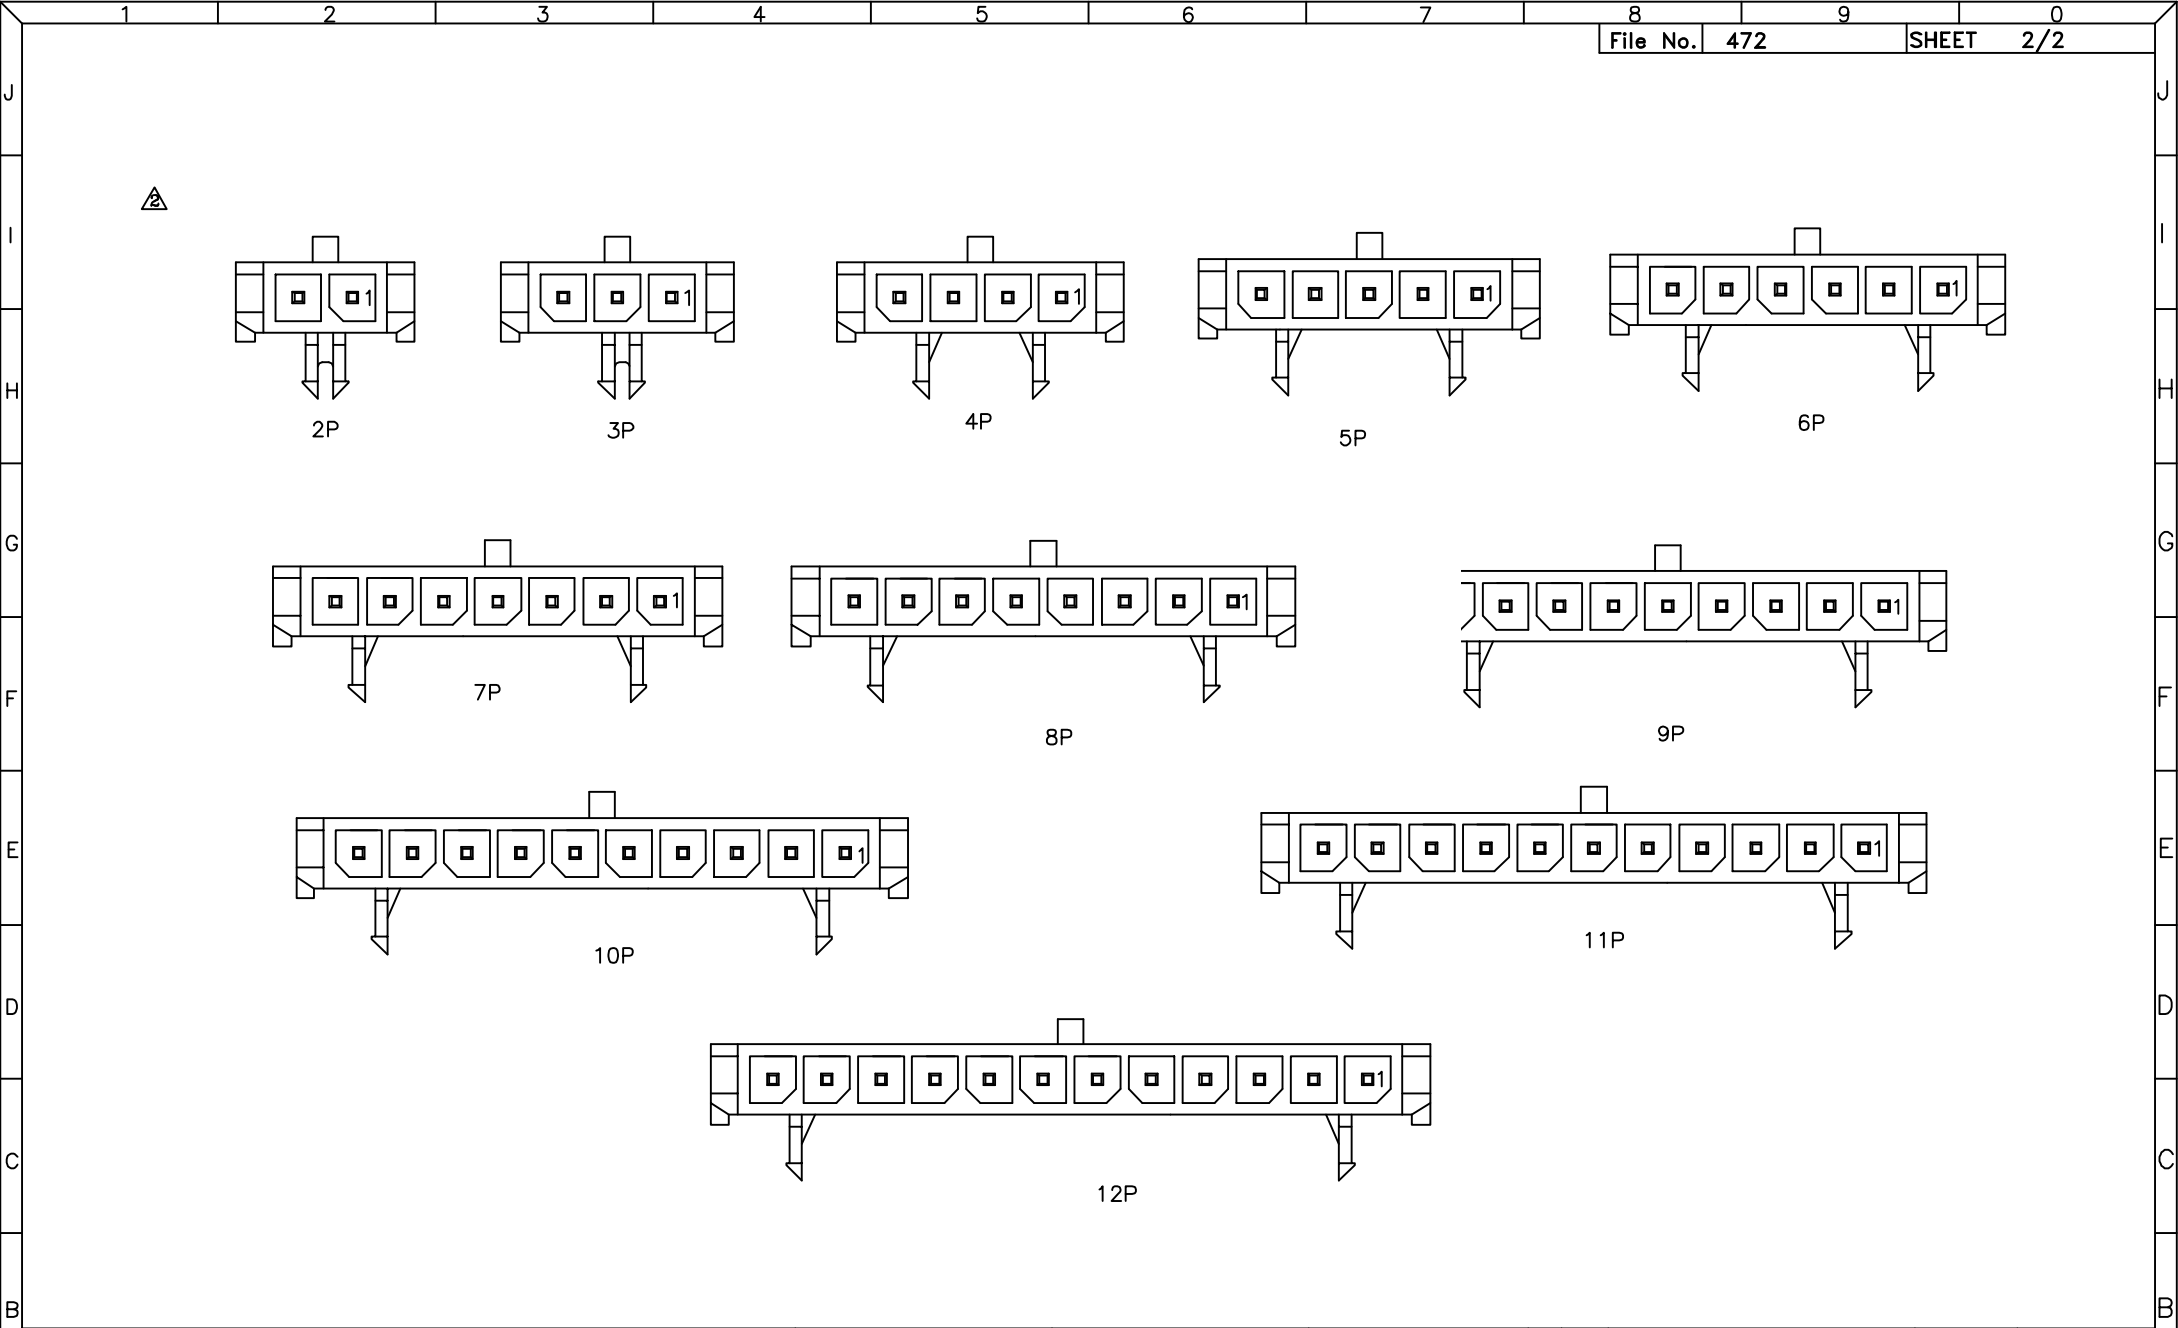

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. 20144		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.50 .XX ±0.25 .XXX ±0.10 ANG. ±2°							
		MEI									
		CHECKED BY									
		HZF									
DRAWING BY		WSS									
SCALE		NONE		REV.	A2	UNIT mm		NO. REV.	REVISIONS	CHK	DATE
5		6		7		8		9		0	