File No.	432	SHEET	1/1

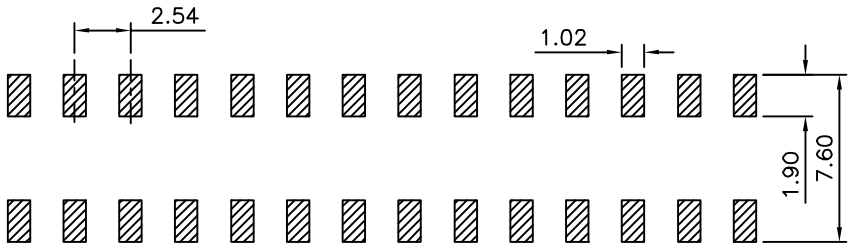

1 Recommended P.C.B. Layout(Top Side)
(PCB Board Tolerance±0.05)

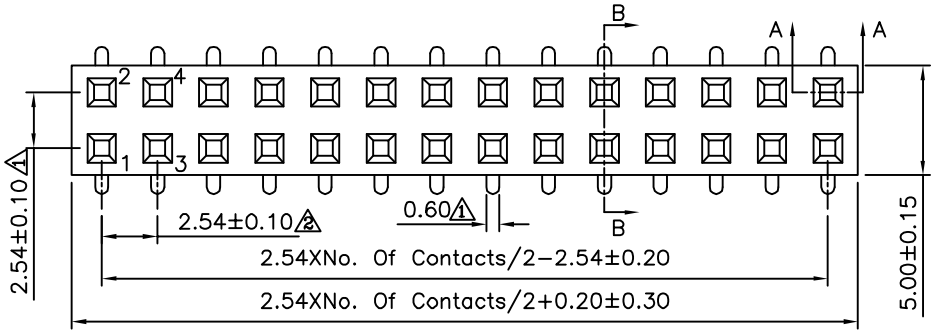

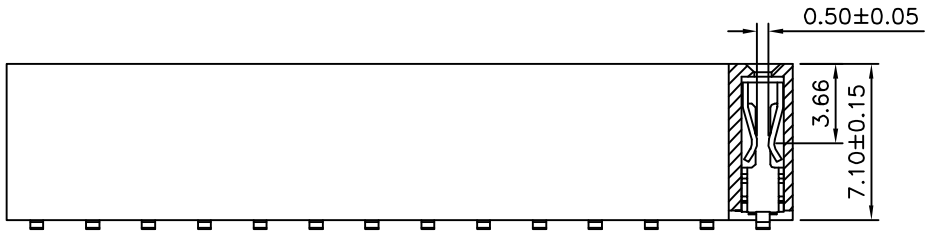

3 1 Section A−A



1 Section B−B

1 SPECIFICATION
Rated Current:3.0 Amp
Withstand Voltage:1000V AC/DC
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:−40°C~+105°C
3 Insulator:PA9T+30%G.F.(UL94V−0),Black
Contact:Phosphor Bronze,Gold Plated Over Nickel
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.	20228		
APPROVED BY	MEI		
CHECKED BY	HZF		
DRAWING BY	GAO		
SCALE	NONE	REV.	A3

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
1 .X ±0.40
.XX ±0.25
.XXX ±0.15
ANG. ±3°
UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
3	A3	Modify Data	HZF	08/09/2012
2	A2	Modify 2.54±1.10−−>2.54±0.10	HZF	10/17/2011
1	A1	Modify Data	HZF	01/16/2010
0	A0	NEW RELEASE	BECKY	04/11/2005