





SPECIFICATION

Current Rating:1.5A
Voltage:30V Max.
Withstanding Voltage:500V AC For 1 Minute
Contact Resistance:30 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Temperature Range:-55°C~+85°C
Mating Force:35N Max.
Withdrawal Force:10N Min.
Durability:1500 Cycles Min.
Contact:Phosphor Bronze

Gold Flash On Contact Area,Tin
Plated On Solder Tails,Over Nickel

Insulator:PBT+30%G.F.(UL94V-0)
Front Shell:Brass,Nickel Plated
Back Shell:SPCC,Nickel Plated
RoHS Compliant

No.	ITEM	Insulator Color
1	15765	White
2	20242	Black

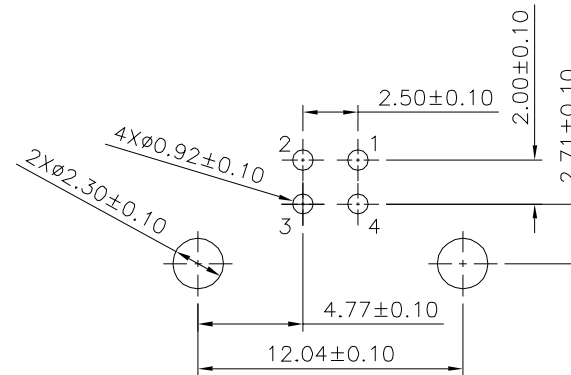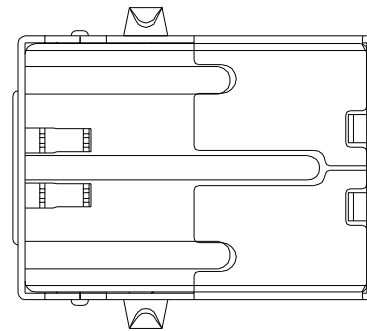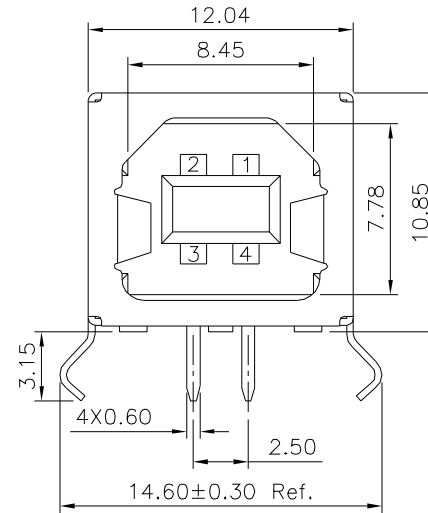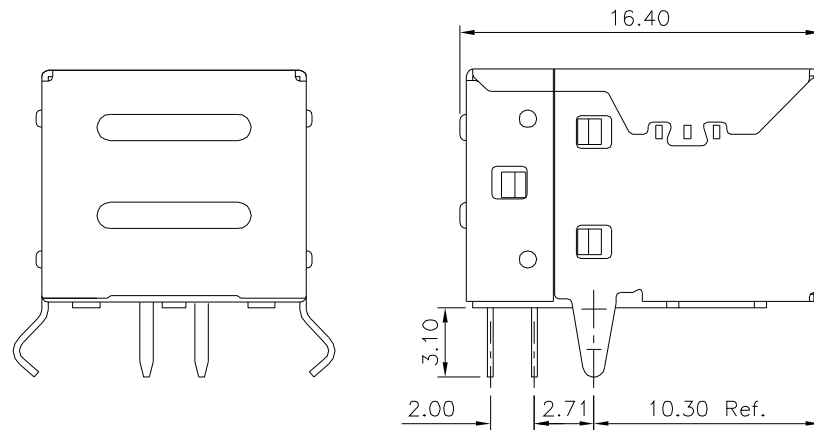

Recommended P.C.B. Layout(Component Side)

Tolerance:±0.05

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

20242

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

HAO


REV.

BO

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

.X ±0.38 .X* ±2*
.XX ±0.25 .XX* ±1*
.XXX ±0.13 .XXX* ±0.5*

UNIT
mm



NO.

REV.

BO

NEW RELEASE

REVISIONS

HZF

CHK

10/13/2015

DATE