


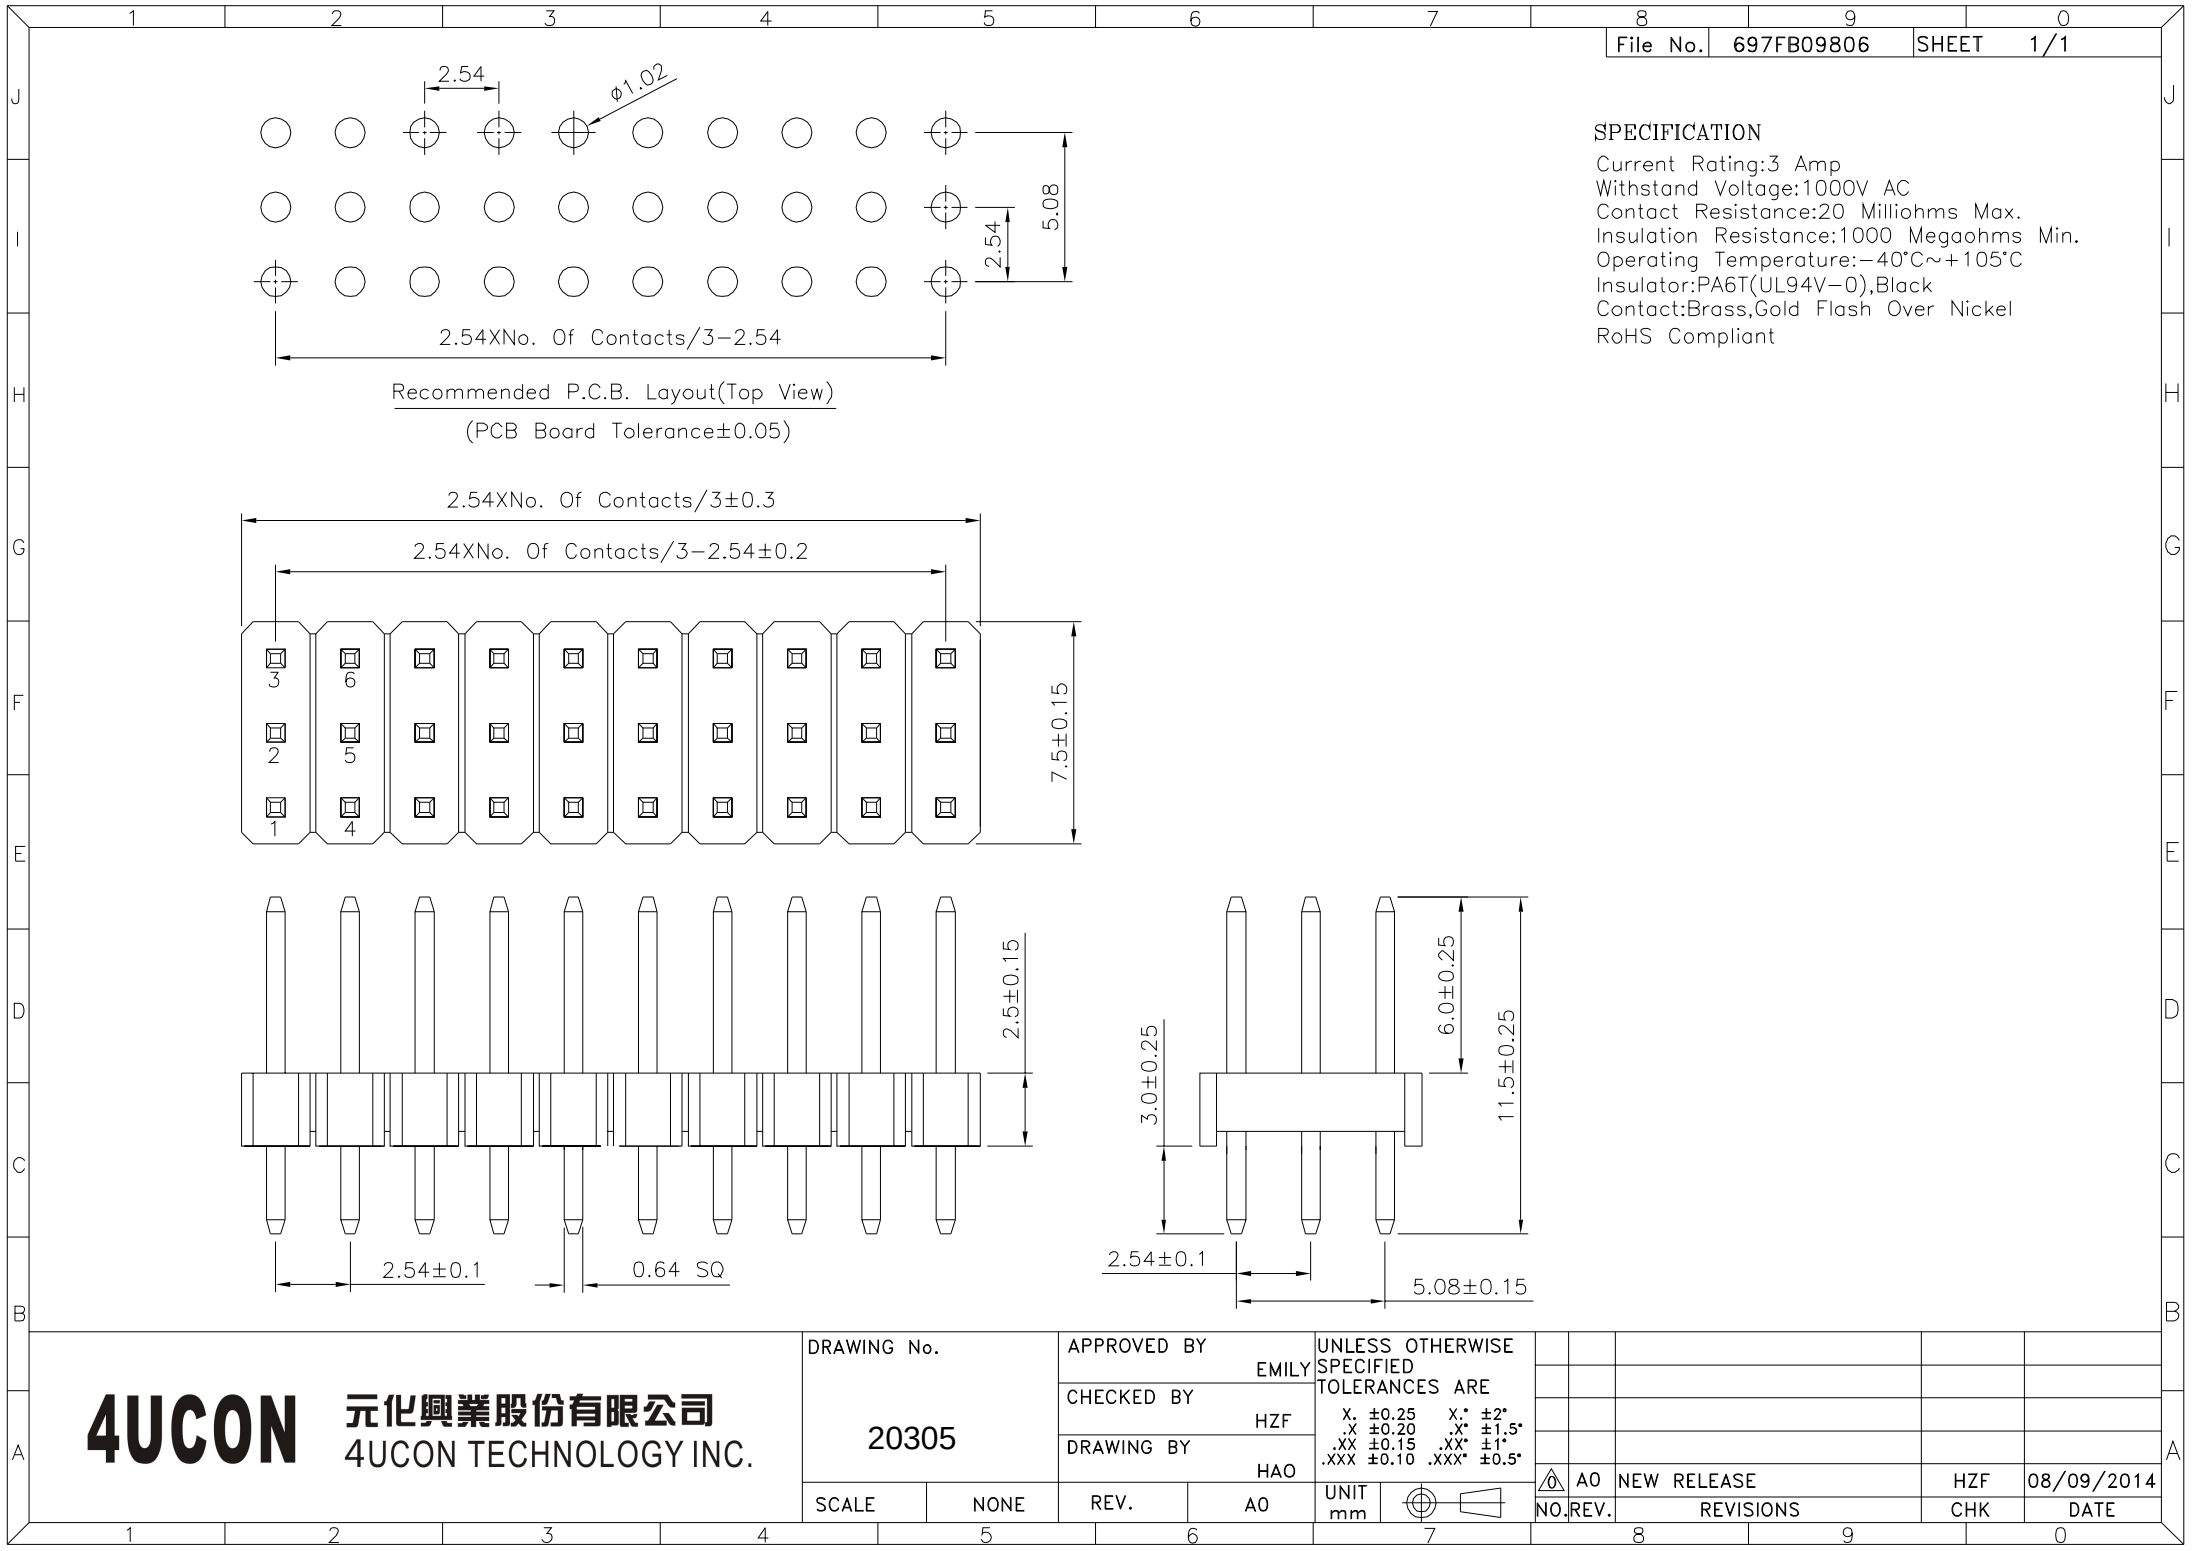

SPECIFICATION
Current Rating:3 Amp
Withstand Voltage:1000V AC
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operating Temperature:−40°C~+105°C
Insulator:PA6T(UL94V−0),Black
Contact:Brass,Gold Flash Over Nickel
RoHS Compliant

Recommended P.C.B. Layout(Top View)
(PCB Board Tolerance±0.05)

4Ucon 元化興業股份有限公司
4Ucon TECHNOLOGY INC.

DRAWING No.		APPROVED BY	
20305		EMILY	
		CHECKED BY	
		HZF	
		DRAWING BY	
		HAO	
SCALE	NONE	REV.	A0

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
X. ±0.25	X.± ±2°
.X ±0.20	.X± ±1.5°
.XX ±0.15	.XX± ±1°
.XXX ±0.10	.XXX± ±0.5°
UNIT	mm

