
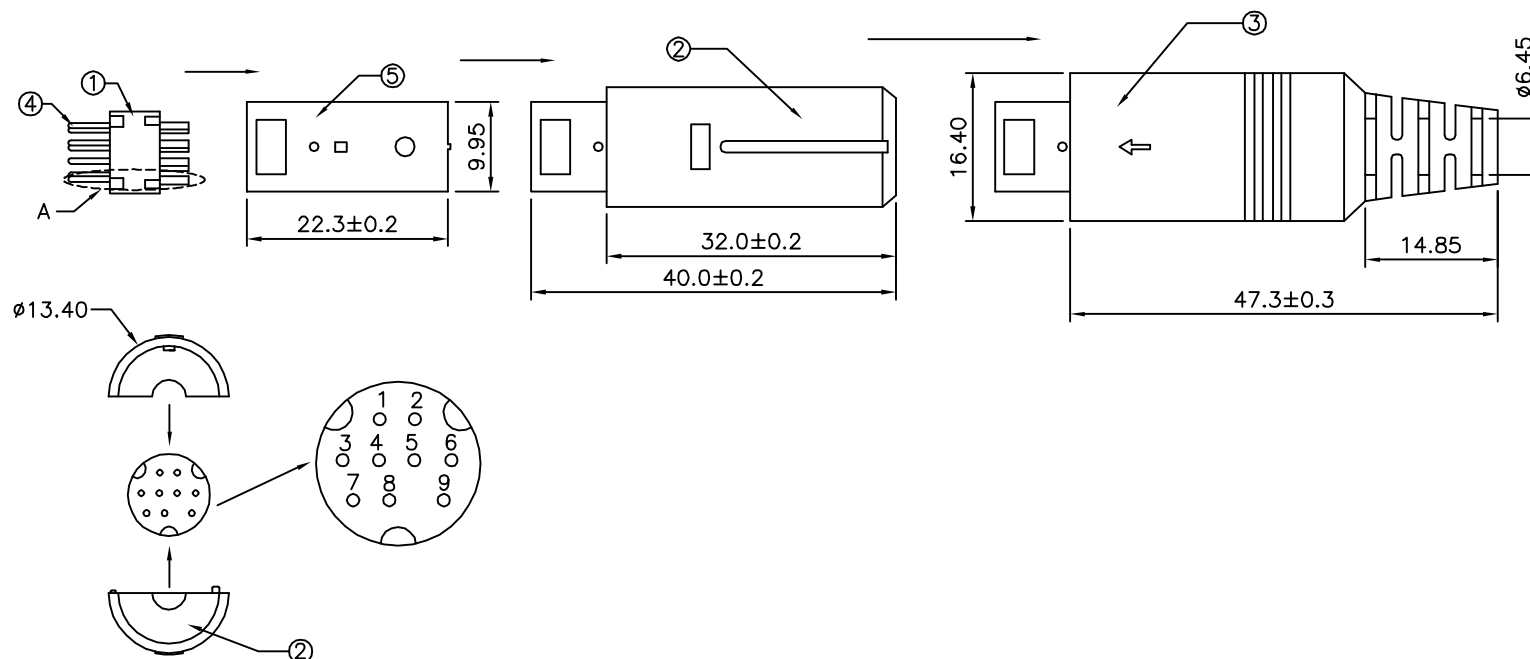


SPECIFICATION

Rating:100V AC 1A Max. Or 12V DC 2A Max.
 Dielectric Strength:250V AC/Minute
 Contact Resistance:30 Milliohms Max.
 Insulation Resistance:50 Megaohms Min. At 250V DC
 Operation Temperature:-5°C~+105°C
 Insertion Force:4.5Kg Max.
 Withdrawal Force:0.9Kg~3Kg
 ① Housing:PA66+G.F.
 ② Shell:ABS
 ③ Cover:PE+2L
 ④ Machined Pin:Brass,Silver Plated
 ⑤ Metal Shield:Brass,Nickel Plated
 RoHS Compliant

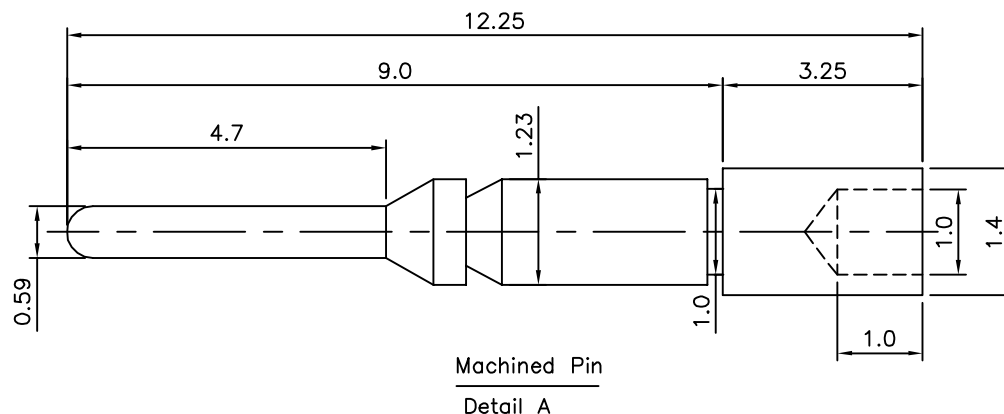

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

20375

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

GAO

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE
 .X ±0.10
 .XX ±0.05
 ANG.

SCALE

NONE

REV.

A0

UNIT
mm



NO. REV.

A0 NEW RELEASE

REVISIONS

HZF

02/27/2012

CHK

DATE