

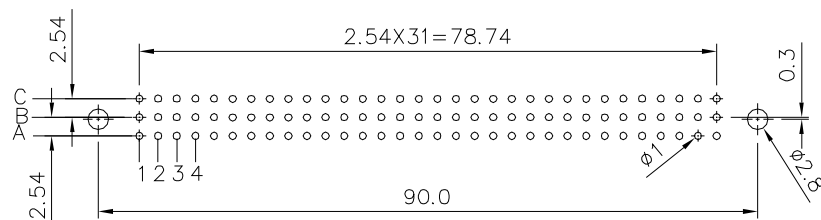



SPECIFICATION

Current Rating:2 Amp
 Withstand Voltage:1000V AC For 1 Minute
 Contact Resistance:30 Milliohms Max. At DC 100mA
 Insulation Resistance:1000 Megaohms Min. At DC 500V
 Operation Temperature:-55°C~+105°C
 Insulator&Cap:PBT+30%G.F.(UL94V-0),Gray
 Contact:C2680-H,Gold Flash On Contact Area,
 Tin Plated On Solder Tails,Over Nickel
 RoHS Compliant

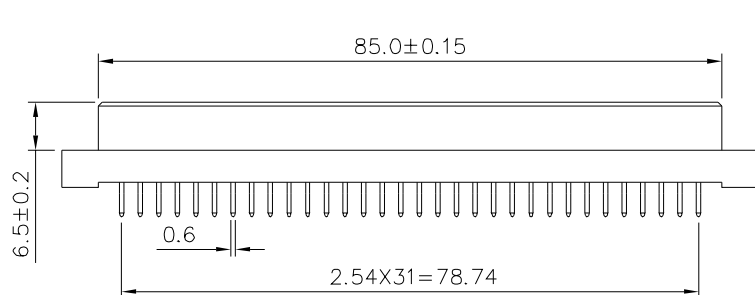

Recommended P.C.B. Layout

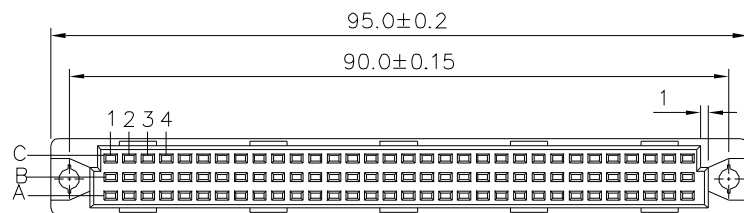

ITEM No.	Pin	Rows With Contacts	Contact Arrange
20406	96	A+B+C	
05620	64	A+C	
05619	32	A+C	

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

20406

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP


UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE

.X ±0.15 X.* ±3*

.XX ±0.10 .X.* ±2*

.XXX ±0.05 .XX.* ±1*

UNIT
 mm



NO. REV.

BO NEW RELEASE
 REVISIONS

HZF
 CHK

03/14/2016
 DATE