

△ SPECIFICATION

Current Range:

Non-Switching:100mA 50V DC

Switching:25mA 24V DC

Withstanding Voltage:500V AC 50Hz Or
60Hz For 1 Minute

Contact Resistance:50 Milliohms Max.(Initial)

Insulation Resistance:100 Megaohms Min.
At 500V DC,60s±5s

△ Operation Temperature Range:-40°C~+85°C


Storage Temperature Range:-40°C~+85°C

Operation Force:9.8N Max.

RoHS Compliant

Pin	A	B
02	6.44	2.54
03	8.98	5.08
04	11.52	7.62
05	14.06	10.16
06	16.60	12.70
07	19.14	15.24
08	21.68	17.78
09	24.22	20.32
10	26.76	22.86
12	31.84	27.94

chematic(Typ.)



(2,3,4,5,6,7,8,9,10,12 Pos Avail)



Description	Q'ty	Material	Remark
Terminal	1	Brass	Gold Plated Over Nickel
Cover	1	PBT,UL94V-0	Blue
Stem	2~12	PBT,UL94V-0	White
Contact	2~12	C7035	Gold Plated Over Nickel
Base	1	PA66+20%G.F.	Black

REV.	NO.	REV.	DESCRIPTION	CHK	DATE
1	B3	Modify Data	HZF	07/13/2018	
2	B2	Modify Data	HZF	08/11/2015	
3	B1	Modify Data	HZF	04/04/2014	
4	B0	Modify P/N:SWXXSR-RD → SWXXSR-XX-H	HZF	03/14/2009	
5	B0	NEW RELEASE	HZF	03/14/2009	



20504

元化興業股份有限公司
4UCON TECHNOLOGY INC.

4UCON

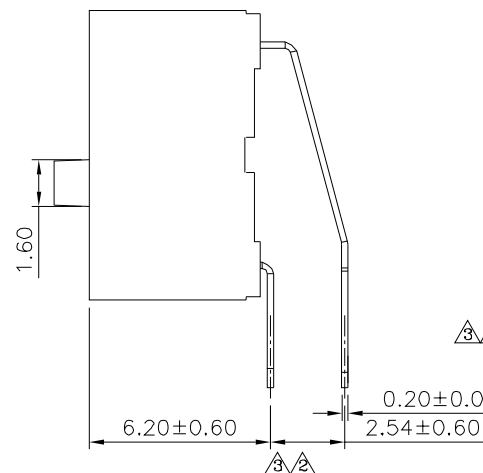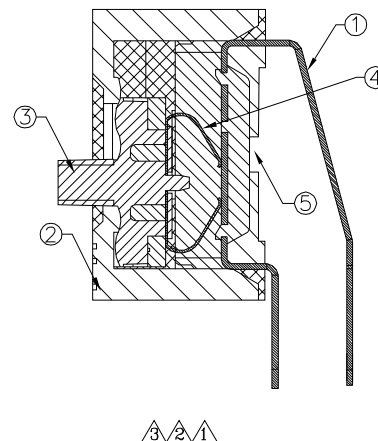

DRAWING No.		APPROVED BY		UN SPR TOL
		MEI		
		HZF		
		CYP		
SCALE	NONE	REV.	B3	UN mm

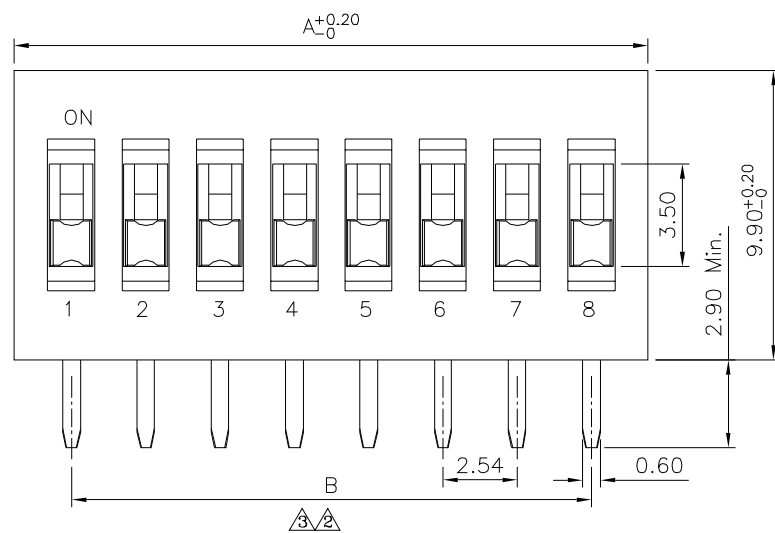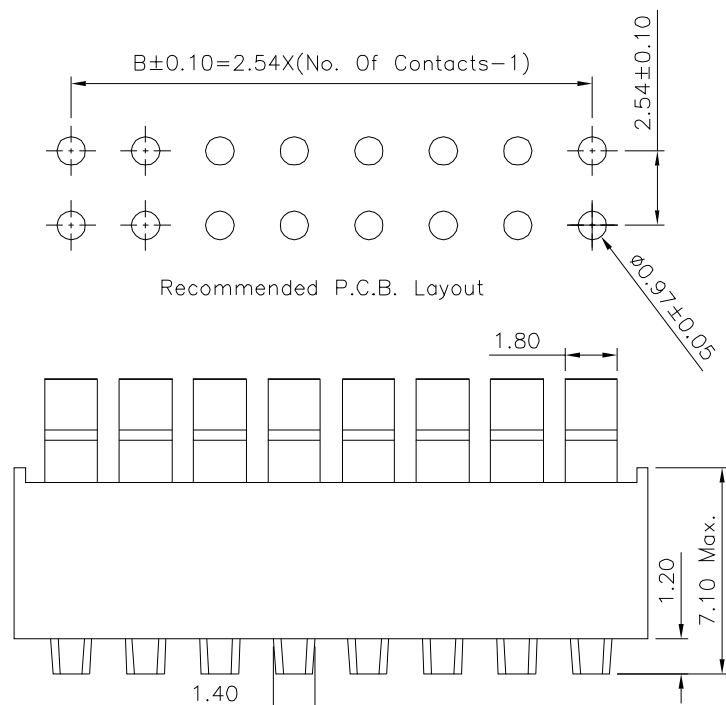

DRAWING No.		APPROVED BY		UN SPR TOL
		MEI		
		HZF		
		CYP		
SCALE	NONE	REV.	B3	UN mm