





# SPECIFICATION

Current Rating:3 Amp  
 Withstand Voltage:1000V AC  
 Contact Resistance:20 Milliohms Max.  
 Insulation Resistance:1000 Megaohms Min.  
 Operation Temperature:−40°C~+105°C

⚠ Insulator:PBT(UL94V−0),Black  
 Contact:Brass,Gold Flash Over Nickel  
 RoHS Compliant

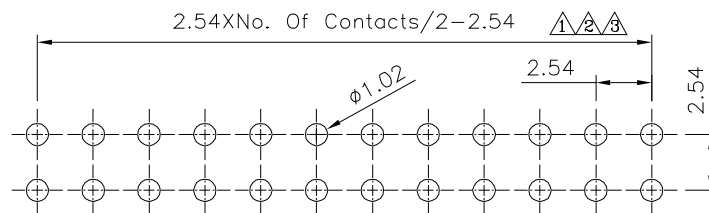

Recommended P.C.B. Layout  
 Tolerance:±0.05 (Top View)

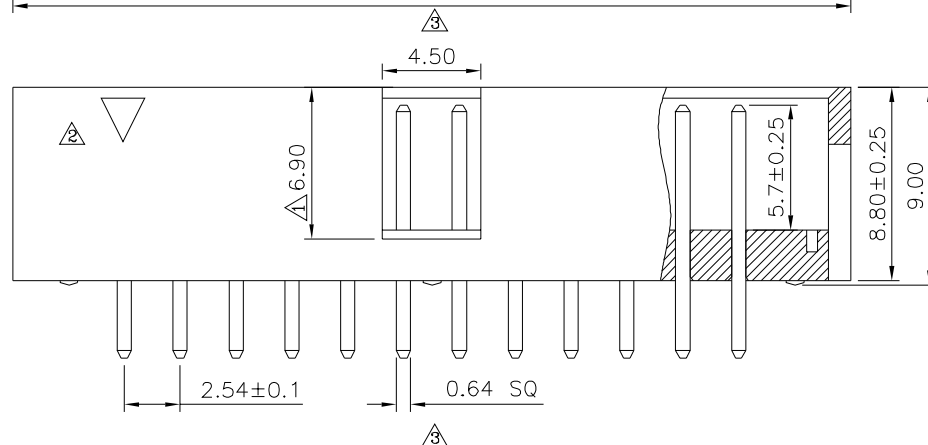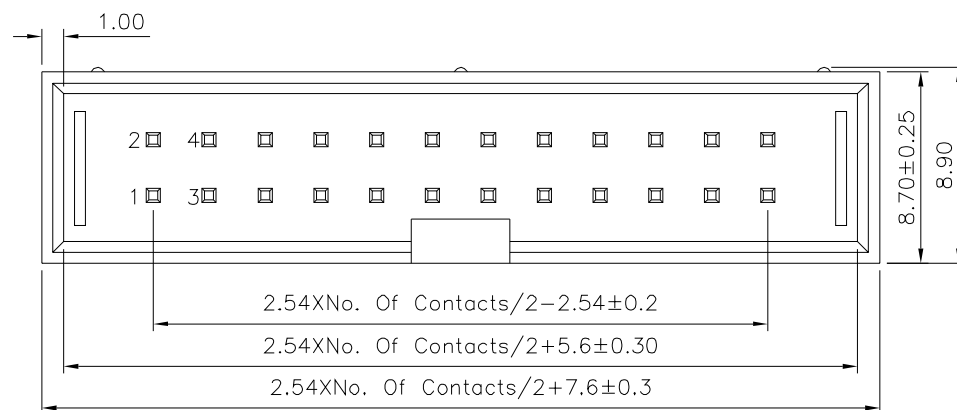

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No. ⚠

20525

SCALE NONE

APPROVED BY EMILY

CHECKED BY HZF


DRAWING BY HAO

REV. A4

UNLESS OTHERWISE  
 SPECIFIED  
 TOLERANCES ARE

|   |      |       |       |       |
|---|------|-------|-------|-------|
| ⚠ | X    | ±0.25 | X*    | ±2*   |
| ⚠ | .X   | ±0.20 | .X*   | ±1.5* |
| ⚠ | .XX  | ±0.15 | .XX*  | ±1.0* |
| ⚠ | .XXX | ±0.1  | .XXX* | ±0.5* |

UNIT mm



| NO. | REV. | REVISIONS   | CHK | DATE       |
|-----|------|-------------|-----|------------|
| ⚠   | A4   | Modify Data | HZF | 01/10/2023 |
| ⚠   | A3   | Modify Data | HZF | 04/17/2015 |
| ⚠   | A2   | Modify Data | HZF | 11/20/2013 |
| ⚠   | A1   | Modify Data | HZF | 09/03/2013 |
| ⚠   | A0   | NEW RELEASE | HZF | 12/14/2010 |