

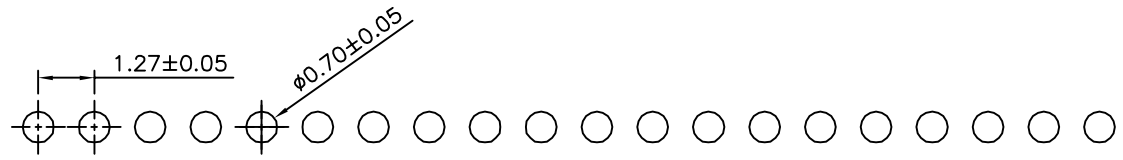



SPECIFICATION

Current Rating:1.0 Amps/Contact Max.
 Withstand Voltage:300V AC/Minute
 Contact Resistance:20 Milliohms/Contact Max.
 Insulation Resistance:500 Megaohms Min. At 100V
 Operation Temperature:-55°C~+105°C
 Insulator:PA6T+30%G.F.(UL94V-0),Black
 Contact:Phosphor Bronze,Gold Flash Over Nickel
 RoHS Compliant

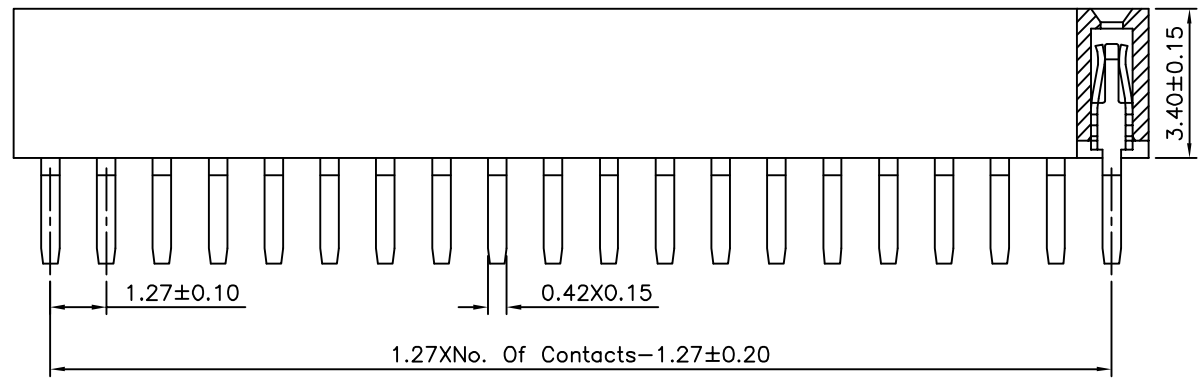

Recommended P.C.B. Layout

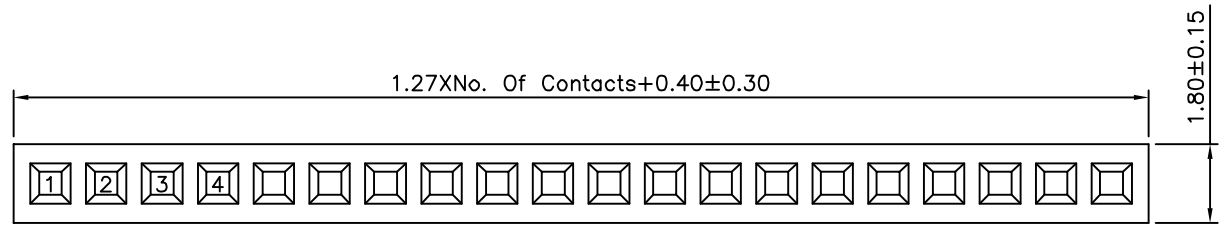

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.
 20580

APPROVED BY
 EMILY
 CHECKED BY
 HZF
 DRAWING BY
 SONG

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 X. ±0.50
 .X ±0.30
 .XX ±0.20
 .XXX ±0.10
 ANG. ±5°

SCALE NONE

REV. A0

UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△ A0		NEW RELEASE	HZF	07/26/2012