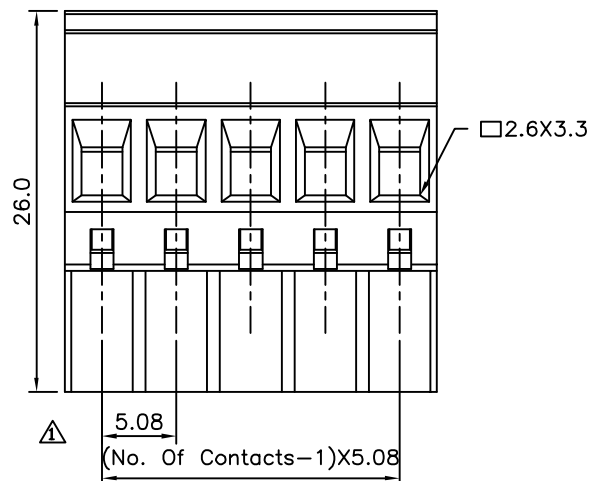
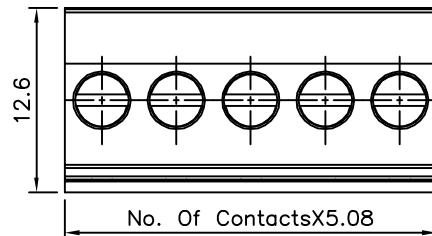


△ SPECIFICATION

Current Rating:16 Amps/Way Max.
Voltage Rating:300V AC
Contact Resistance:20 Milliohms Max.
Withstanding Voltage:2500V AC(1 Minute)
Test Time=60 Sec/1 PCS

Wire Range:12~26 AWG
Operation Temperature:-40°C~+105°C
Soldering Reliability:Test Temperature=250°C±10°C/5 Seconds Max.
Torque:5.0 Kgf.cm/M3
Contact(Metal Housing):Copper Alloy,Nickel Plated
Wire Guard:Copper Alloy,Tin Plated
Terminal Screw:Steel,Galvanized With Cr3+ Plated
Insulator Body(Housing):Polyamide(UL94V-0),Green
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

20599

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

CYP

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
X. ±0.50
.X ±0.30
.XX ±0.20
ANG. ±1°


SCALE

NONE

REV.

A1

UNIT
mm



NO.

REV.

A1 Modify Data

A0 NEW RELEASE

REVISIONS

HZF

HZF

CHK

10/31/2014

09/26/2009

DATE