
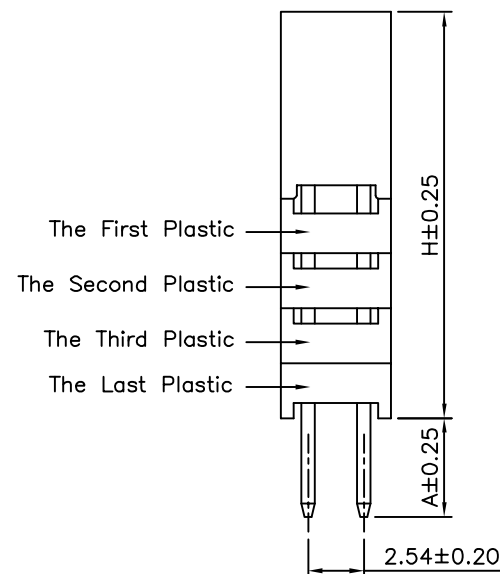


SPECIFICATION

Current Rating:3.0 Amp
 Withstand Voltage:1000V AC/DC
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operation Temperature:-40°C~+105°C
 Contact:Brass,Gold Plated Over Nickel
 Insulator:PA9T+30%G.F.(UL94V-0),Black
 RoHS Compliant

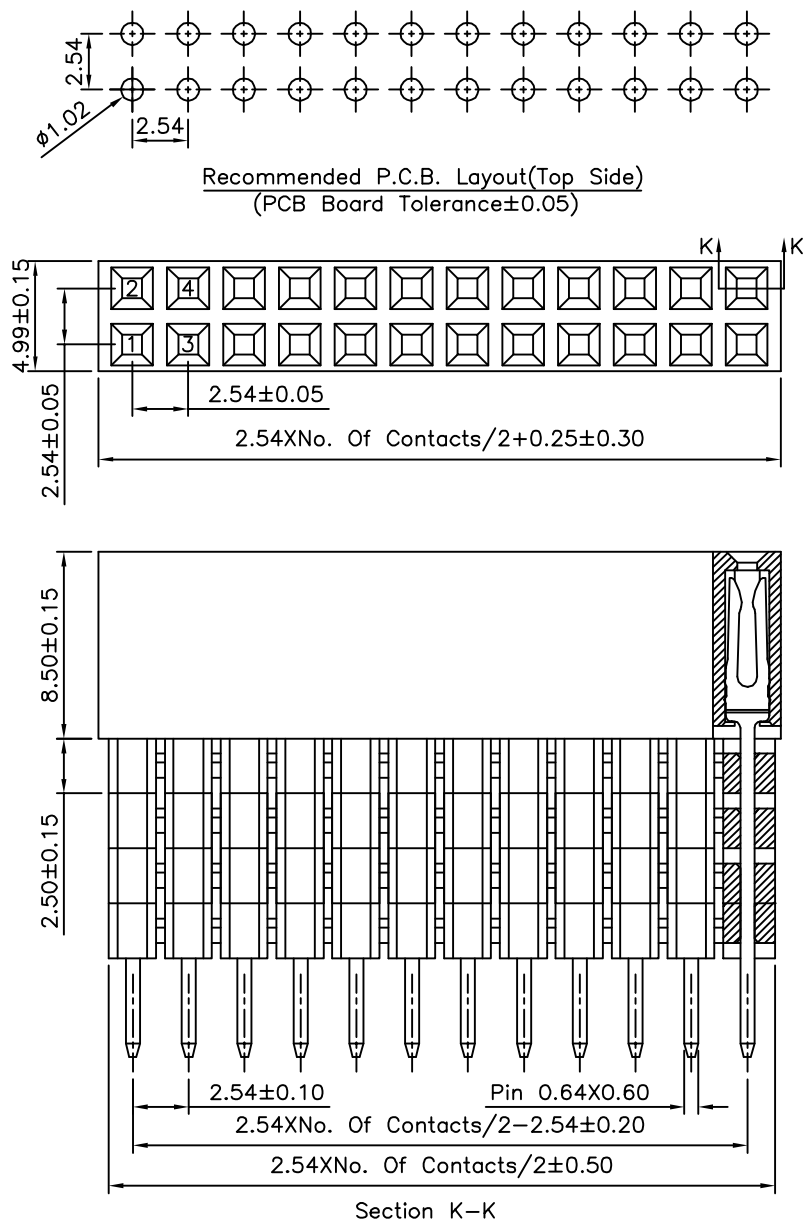

Series No.	Plastic Q'ty	H	A
0196	1	11.05	2.30
0196	1	11.05	7.35
0196	1	11.05	12.2
0197	2	13.59	4.85
0197	2	13.59	9.65
0198	3	16.13	7.10
0199	4	18.67	4.60

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

20625

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

SAN

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE
 .X ±0.40
 .XX ±0.25
 .XXX ±0.15
 ANG. ±3°


SCALE

NONE

REV.

A0

UNIT
 mm



NO.

REV.

NEW RELEASE

REVISIONS

HZF

CHK

01/29/2014

DATE