

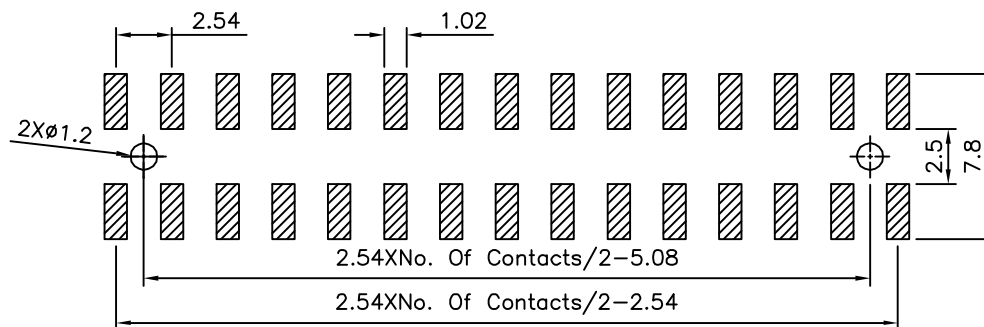



SPECIFICATION

Current Rating:3A
 Withstand Voltage:1000V AC
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operation Temperature:-40°C~+105°C
 Insulator:PA6T(UL94V-0),Black
 Contact:Phosphor Bronze
 Gold Flash On Contact Area,Tin
 Plated On Solder Tails,Over Nickel
 RoHS Compliant

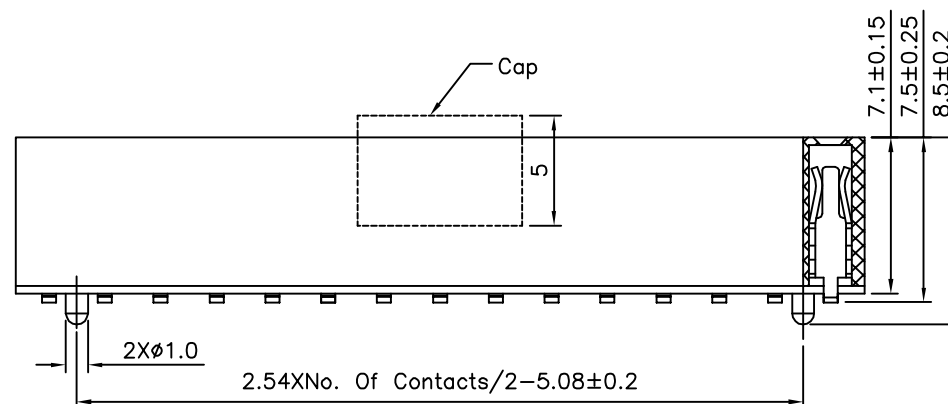

Recommended P.C.B. Layout(Top View)
 (PCB Board Tolerance±0.05)

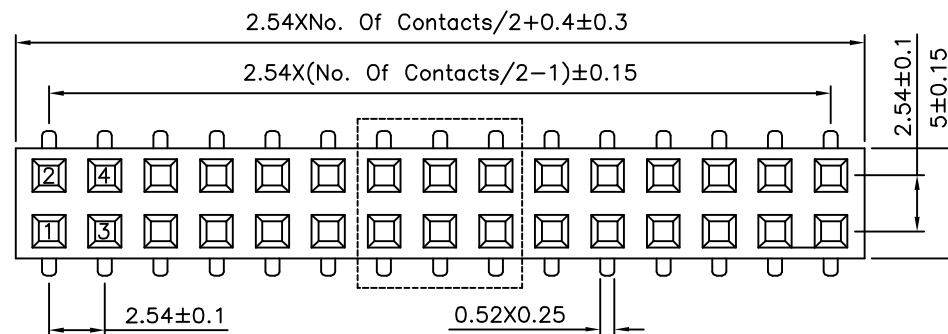

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

20653

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

HAO

REV.

A0

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE

X. ±0.25 X. ±2°
 .X ±0.20 .X ±1.5°
 .XX ±0.15 .XX ±1°
 .XXX ±0.10 .XXX ±0.5°

UNIT
 mm



NO. REV.

REVISIONS

CHK

DATE

A0

NEW RELEASE

HZF

07/05/2014