

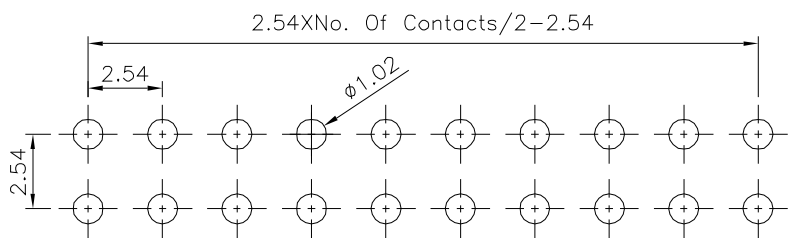
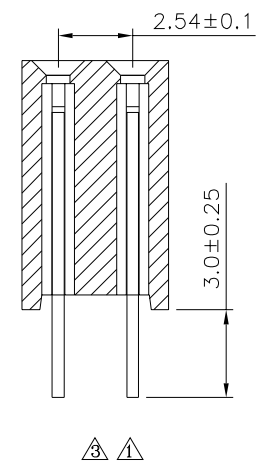


SPECIFICATION

Current Rating:3 Amps
 ⚠ Withstand Voltage:1000V AC Min./Minute
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operation Temperature:-40°C~+105°C
 Contact:Brass,Gold Flash Over Nickel
 Insulator:PBT(UL94V-0),Black
 RoHS Compliant

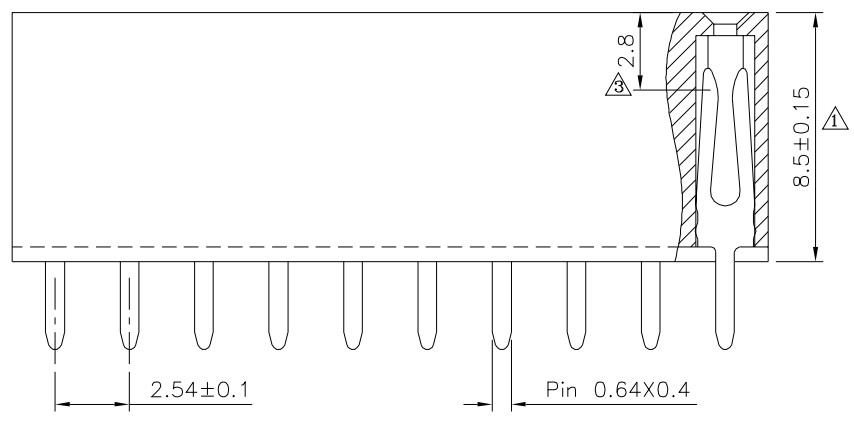

⚠ Recommended P.C.B. Layout(Top View)
 (PCB Board Tolerance±0.05)

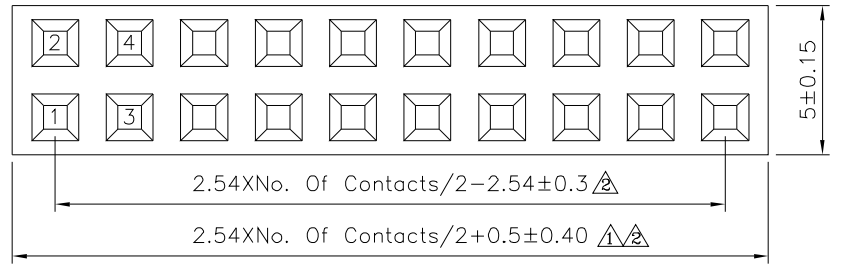

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.25 X.* ±2° .X ±0.20 .X* ±1.5° .XX ±0.15 .XX* ±1° .XXX ±0.10 .XXX* ±0.5°	
20668		EMILY			
		CHECKED BY			
		HZF			
		DRAWING BY		UNIT mm	
		SAN			
SCALE		REV.			
NONE		A3		NO. REV.	
				REVISIONS	
				CHK	
				DATE	

⚠ A3	Modify Data	HZF	10/30/2021
⚠ A2	Modify Data	HZF	05/28/2014
⚠ A1	Modify Data	HZF	09/03/2013
⚠ A0	NEW RELEASE	HZF	08/03/2011