


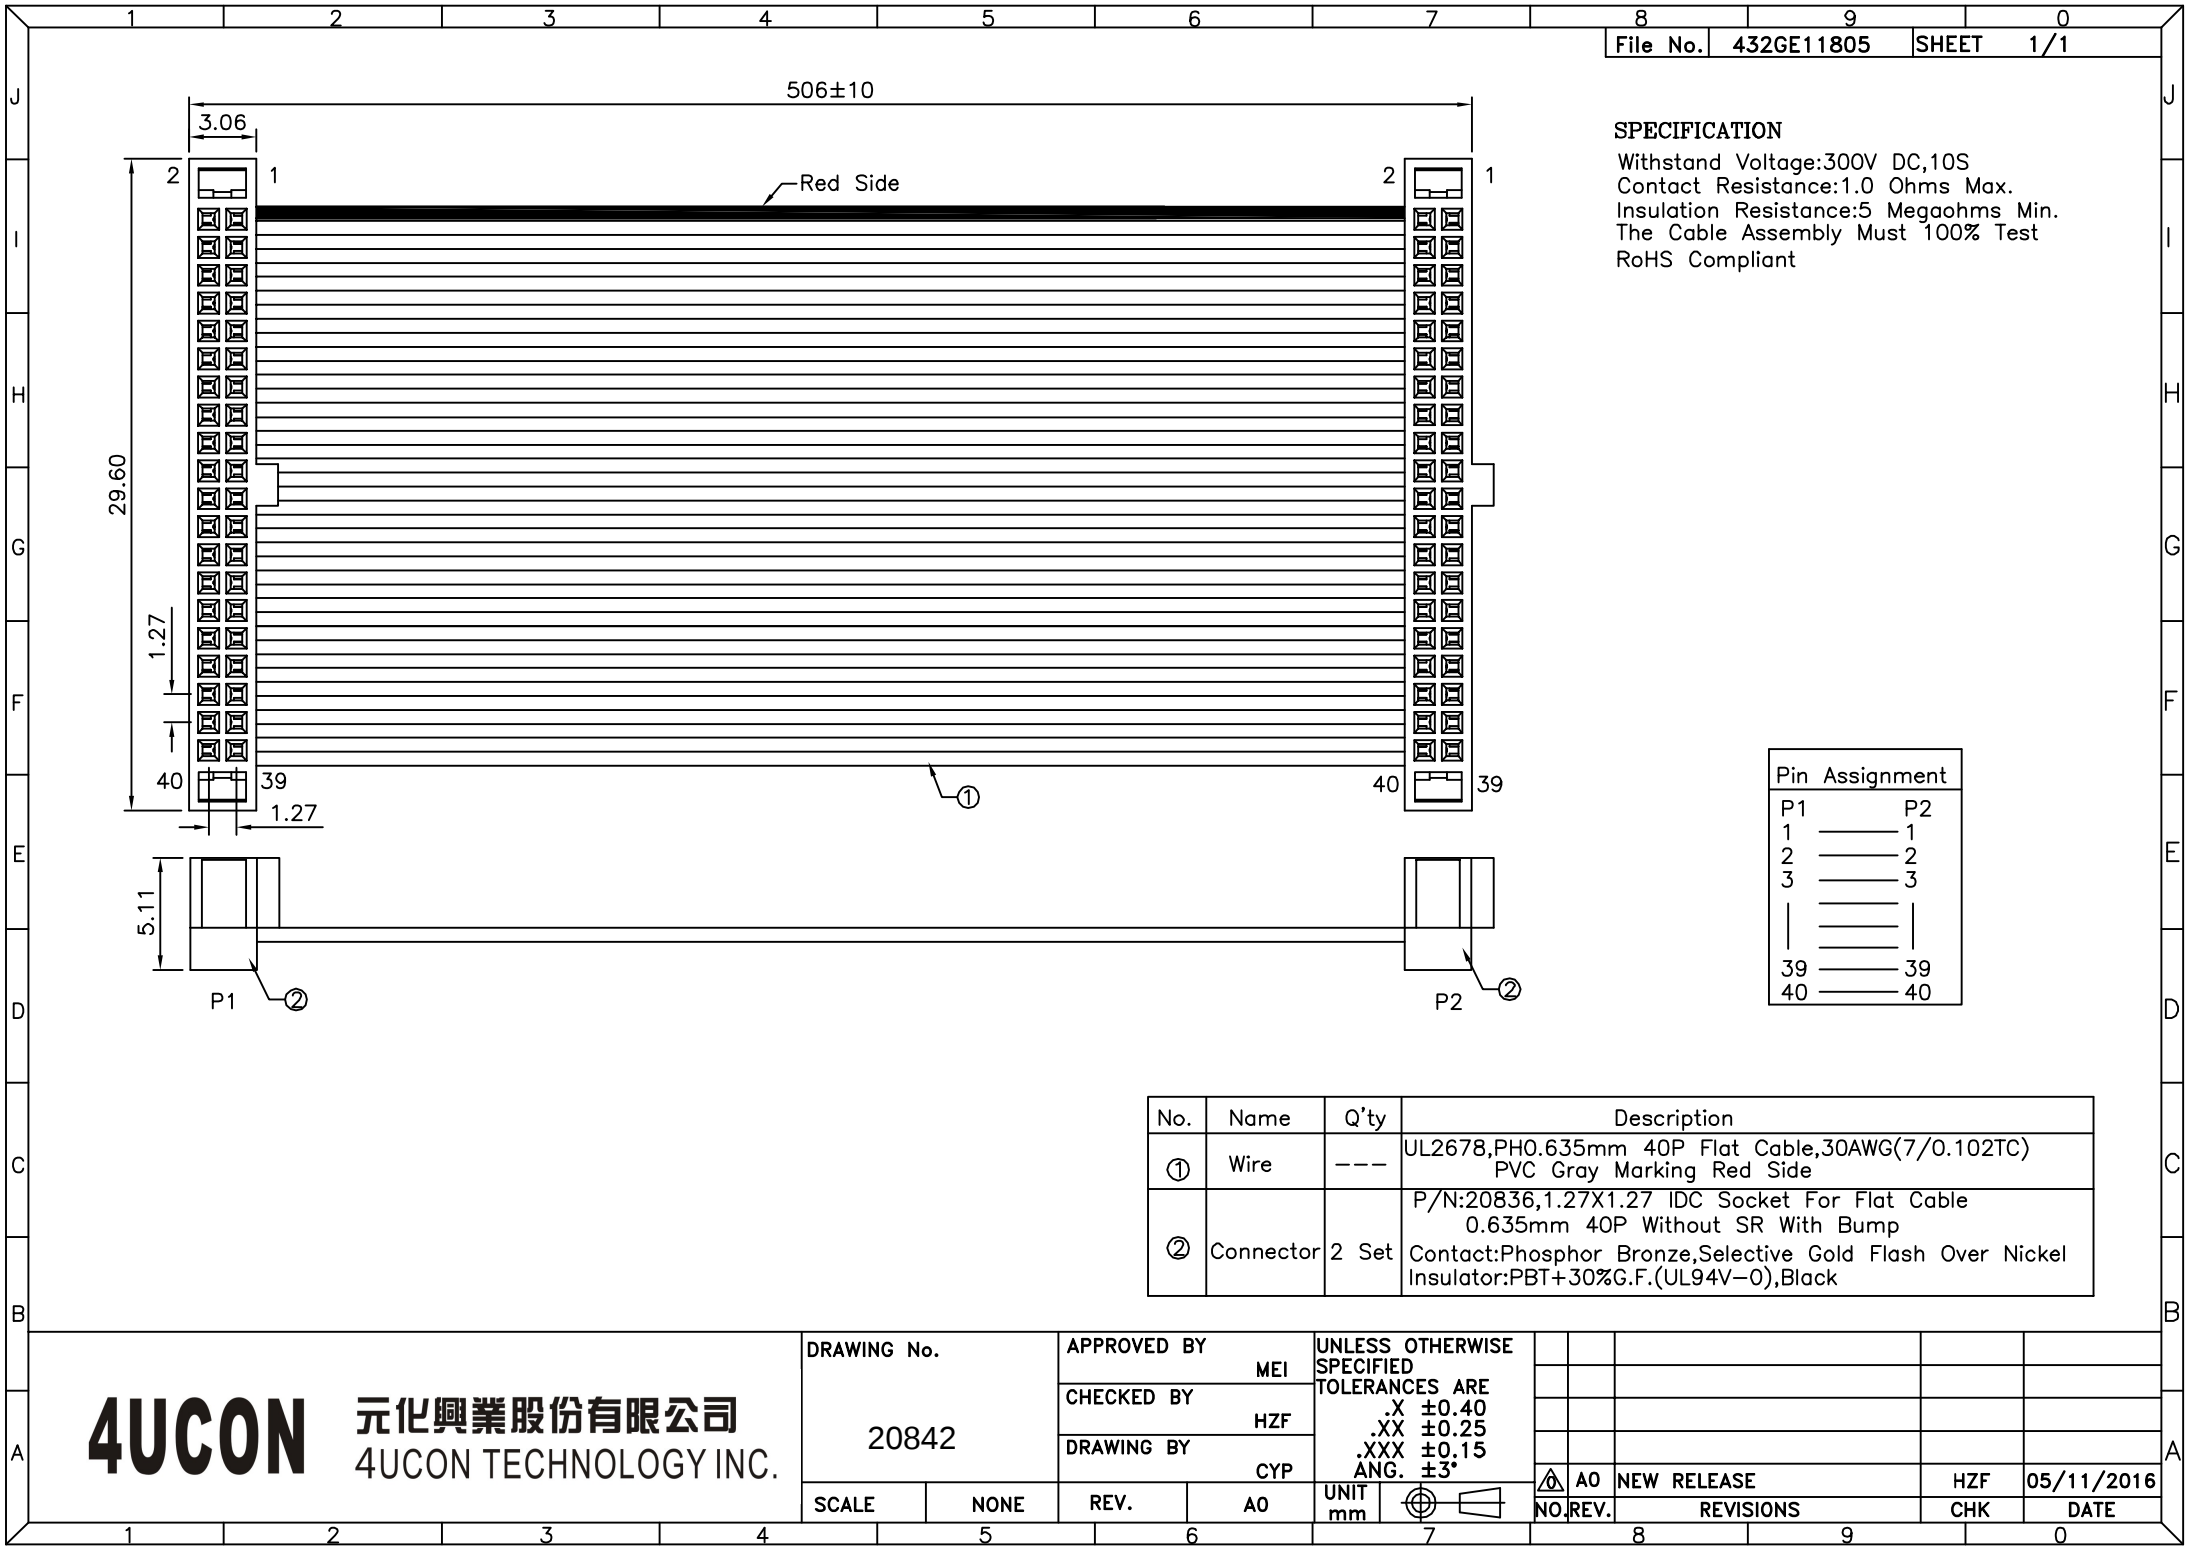

SPECIFICATION
Withstand Voltage:300V DC,10S
Contact Resistance:1.0 Ohms Max.
Insulation Resistance:5 Megaohms Min.
The Cable Assembly Must 100% Test
RoHS Compliant

Pin Assignment	
P1	P2
1	1
2	2
3	3
39	39
40	40

No.	Name	Q'ty	Description
①	Wire	---	UL2678,PH0.635mm 40P Flat Cable,30AWG(7/0.102TC) PVC Gray Marking Red Side
②	Connector	2 Set	P/N:20836,1.27X1.27 IDC Socket For Flat Cable 0.635mm 40P Without SR With Bump Contact:Phosphor Bronze,Selective Gold Flash Over Nickel Insulator:PBT+30%G.F.(UL94V-0),Black

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. 20842		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.40 .XX ±0.25 .XXX ±0.15 ANG. ±3°	
		MEI			
		CHECKED BY			
		HZF			
		DRAWING BY			
		CYP			
SCALE	NONE	REV.	A0	UNIT mm	

△ A0	NEW RELEASE	HZF	05/11/2016
NO.REV.	REVISIONS	CHK	DATE