


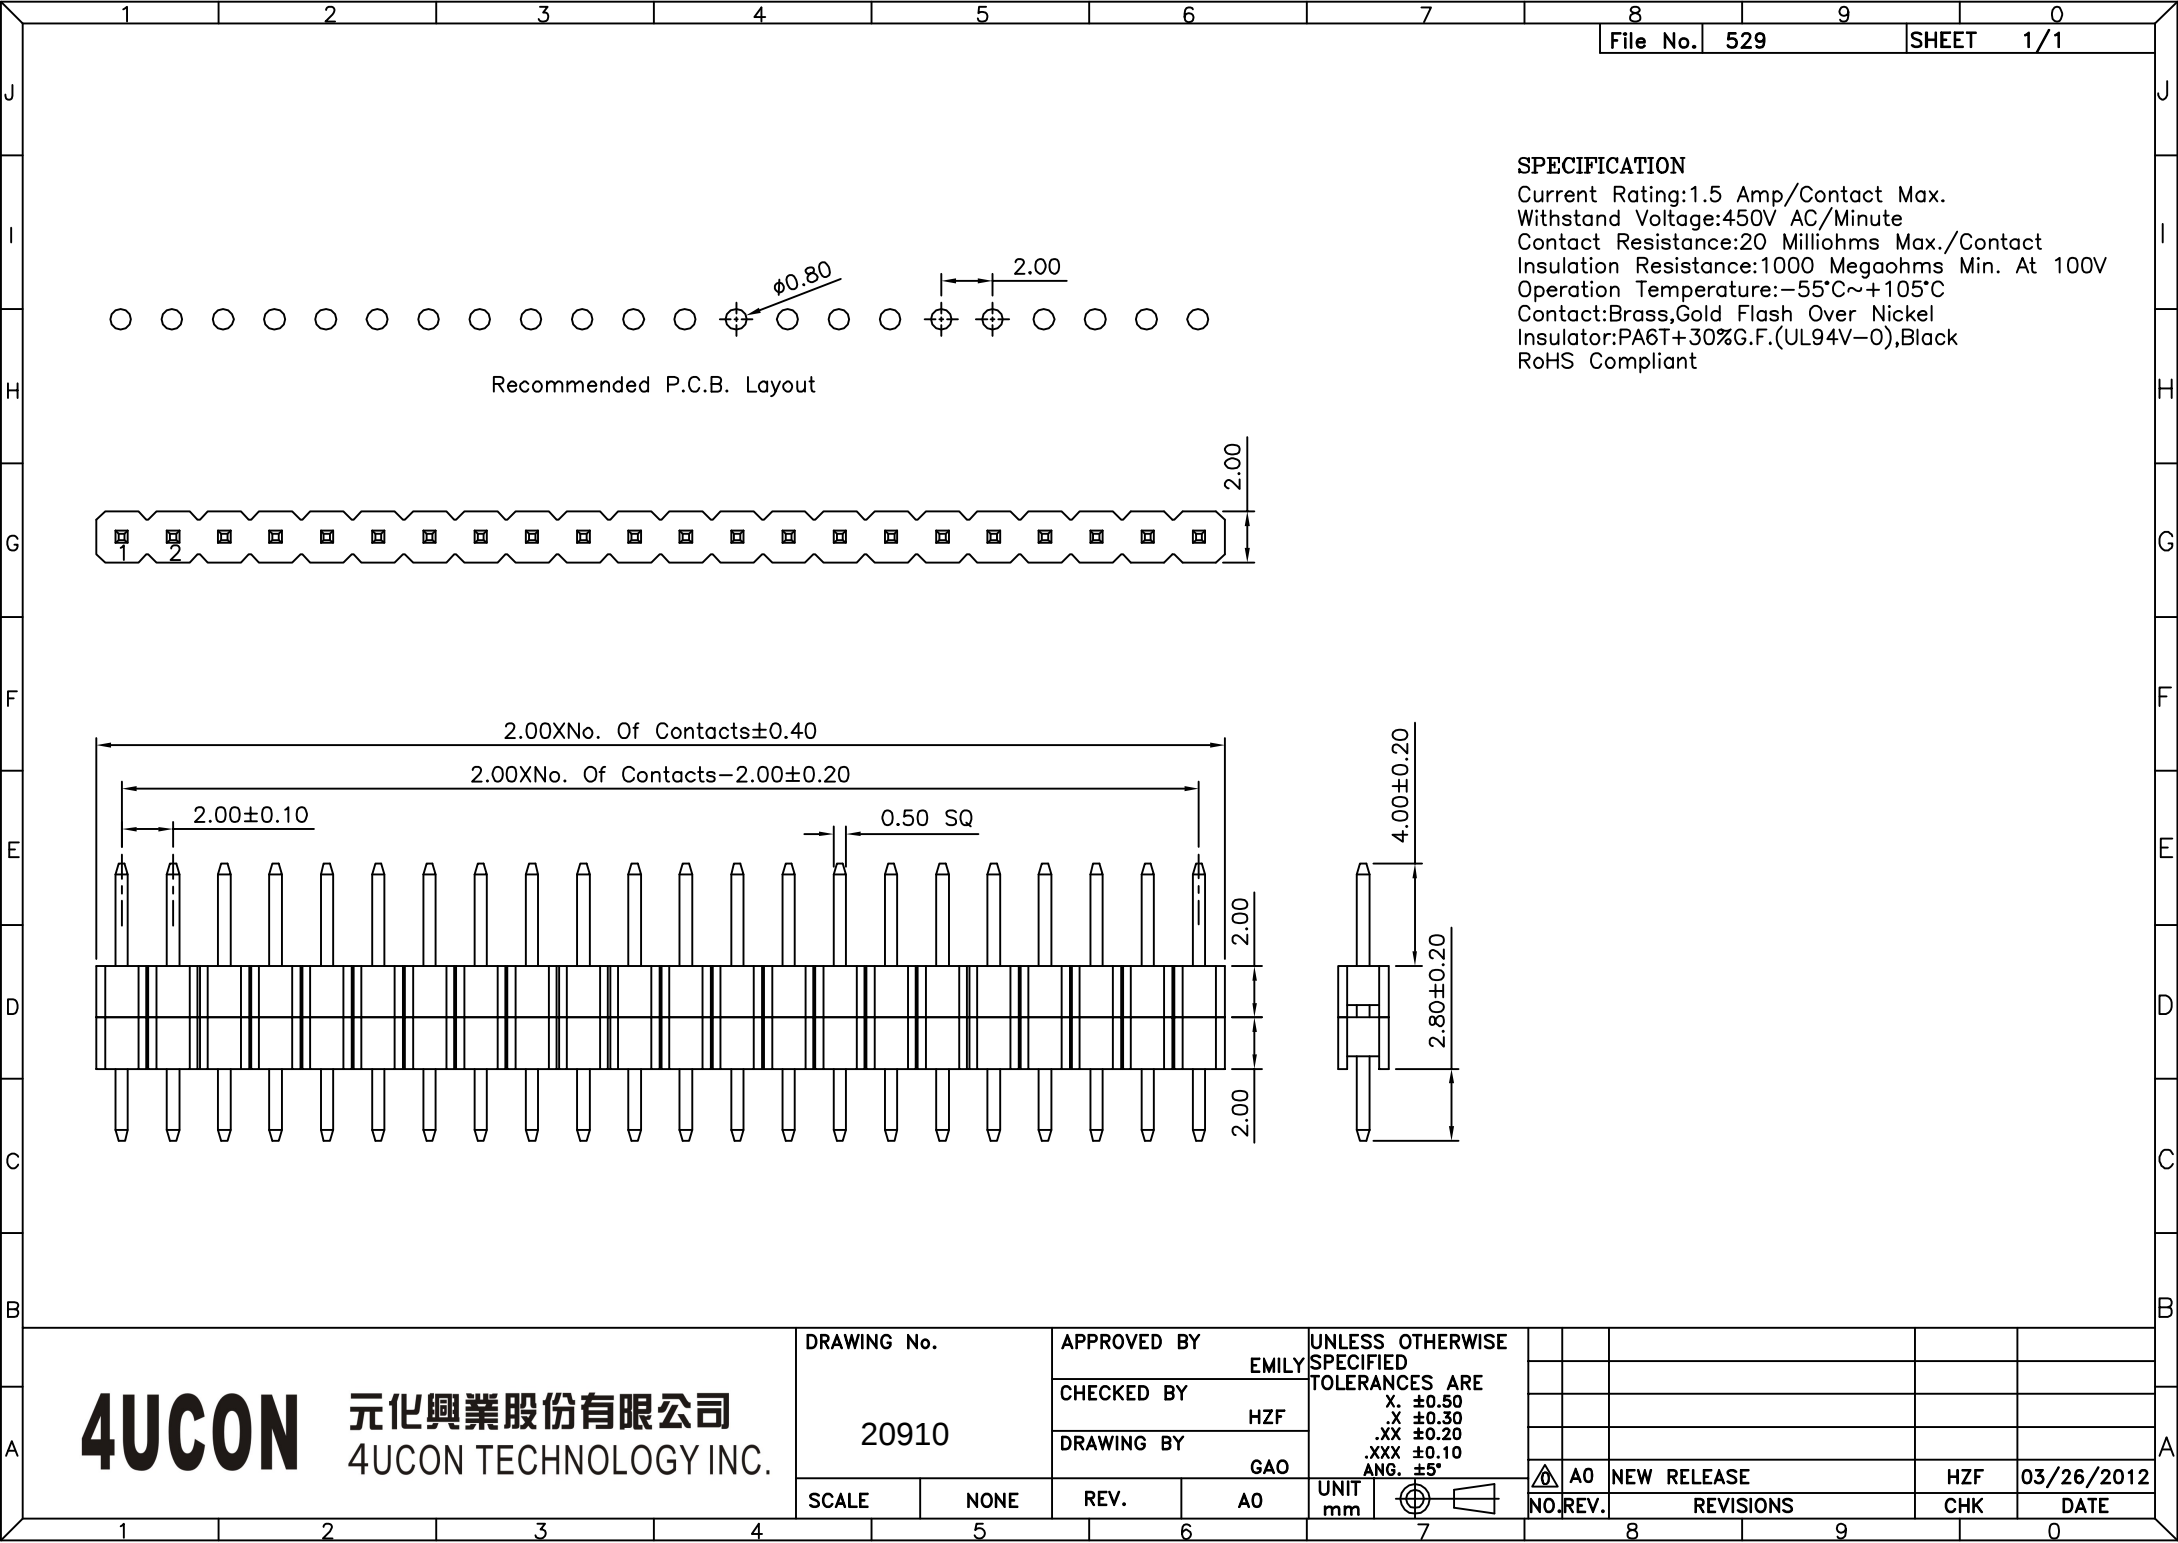

SPECIFICATION

Current Rating:1.5 Amp/Contact Max.
Withstand Voltage:450V AC/Minute
Contact Resistance:20 Milliohms Max./Contact
Insulation Resistance:1000 Megaohms Min. At 100V
Operation Temperature:-55°C~+105°C
Contact:Brass,Gold Flash Over Nickel
Insulator:PA6T+30%G.F.(UL94V-0),Black
RoHS Compliant

4UCON

元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

20910

APPROVED BY

EMILY


CHECKED BY

HZF

DRAWING BY

GAO

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
X. ± 0.50
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG. $\pm 5^\circ$



UNIT

mm

NO.

REV.

NEW RELEASE

REVISIONS

CHK

03/26/2012

DATE