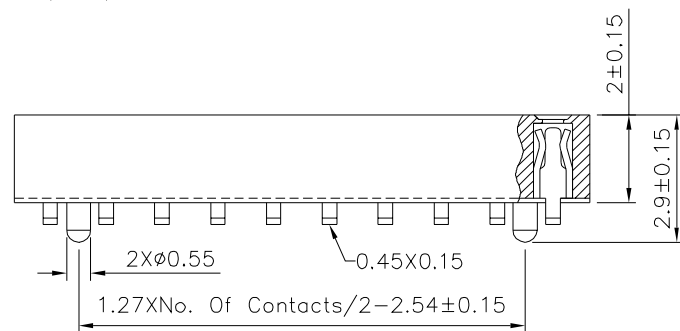
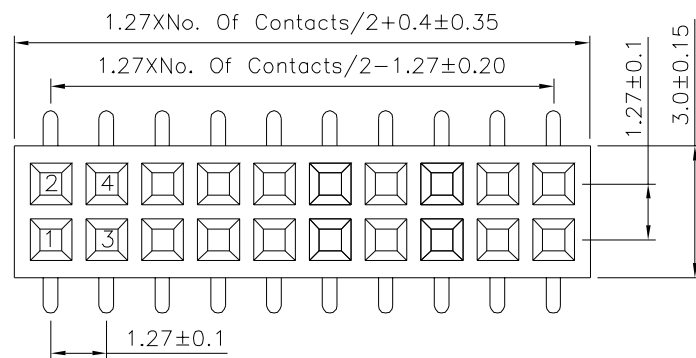
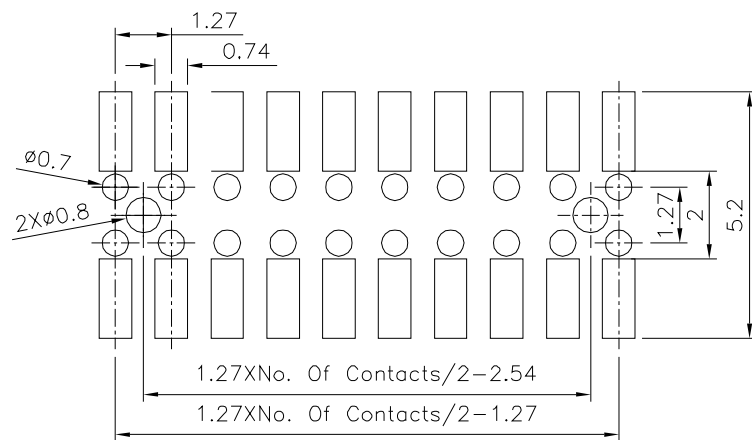


SPECIFICATION

Current Rating: 1 Amp
Withstand Voltage: 500V AC
Contact Resistance: 20 Milliohms Max.
Insulation Resistance: 1000 Megaohms Min.
Operating Temperature: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$
Insulator: PA6T(UL94V-0), Black
Contact: Phosphor Bronze, Gold Flash Over Nickel
RoHS & Halogen Free Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

20916

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

X. ± 0.25 X." $\pm 2^{\circ}$
.X ± 0.20 .X" $\pm 1.5^{\circ}$
.XX ± 0.15 .XX" $\pm 1^{\circ}$
.XXX ± 0.10 .XXX" $\pm 0.5^{\circ}$

UNIT
mm



NO. REV.

REVISIONS

CHK

DATE

AO

NEW RELEASE

HZF

04/18/2016