


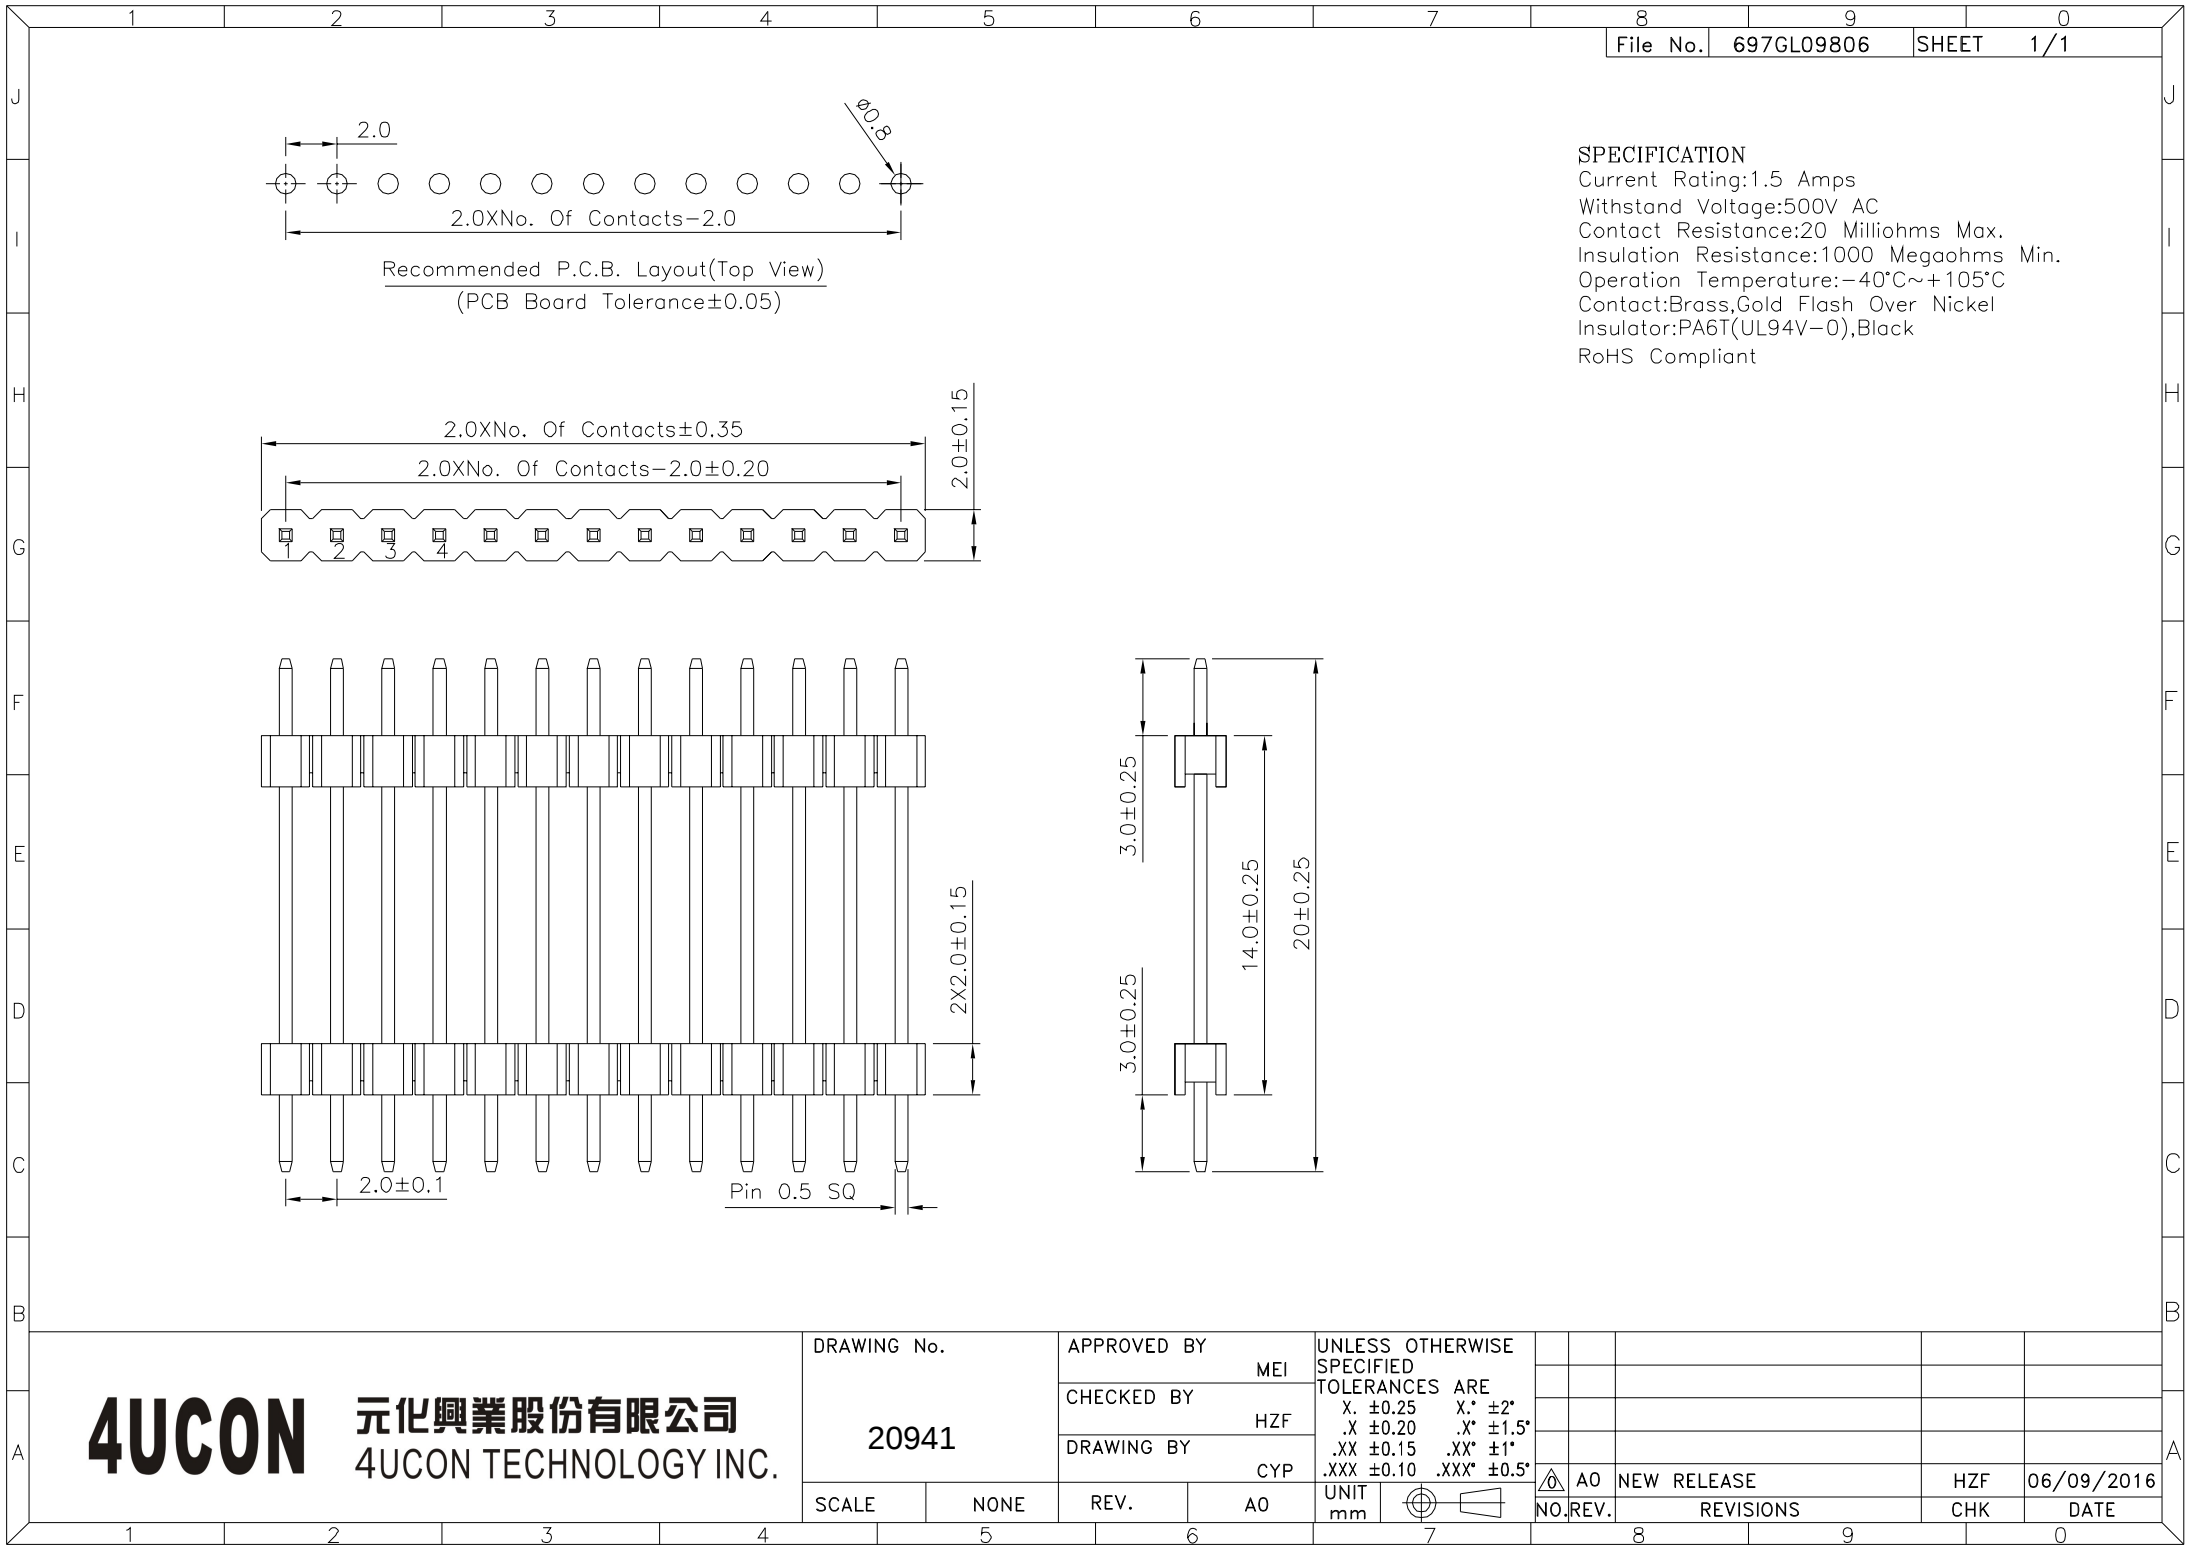

SPECIFICATION
Current Rating:1.5 Amps
Withstand Voltage:500V AC
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:-40°C~+105°C
Contact:Brass,Gold Flash Over Nickel
Insulator:PA6T(UL94V-0),Black
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. 20941		APPROVED BY MEI	
		CHECKED BY HZF	
		DRAWING BY CYP	
SCALE	NONE	REV.	A0

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.25 X.* ±2° .X ±0.20 .X* ±1.5° .XX ±0.15 .XX* ±1° .XXX ±0.10 .XXX* ±0.5°		UNIT mm	
		NO. REV.	
		REVISIONS	
A0 NEW RELEASE		HZF 06/09/2016	
A0		CHK DATE	