


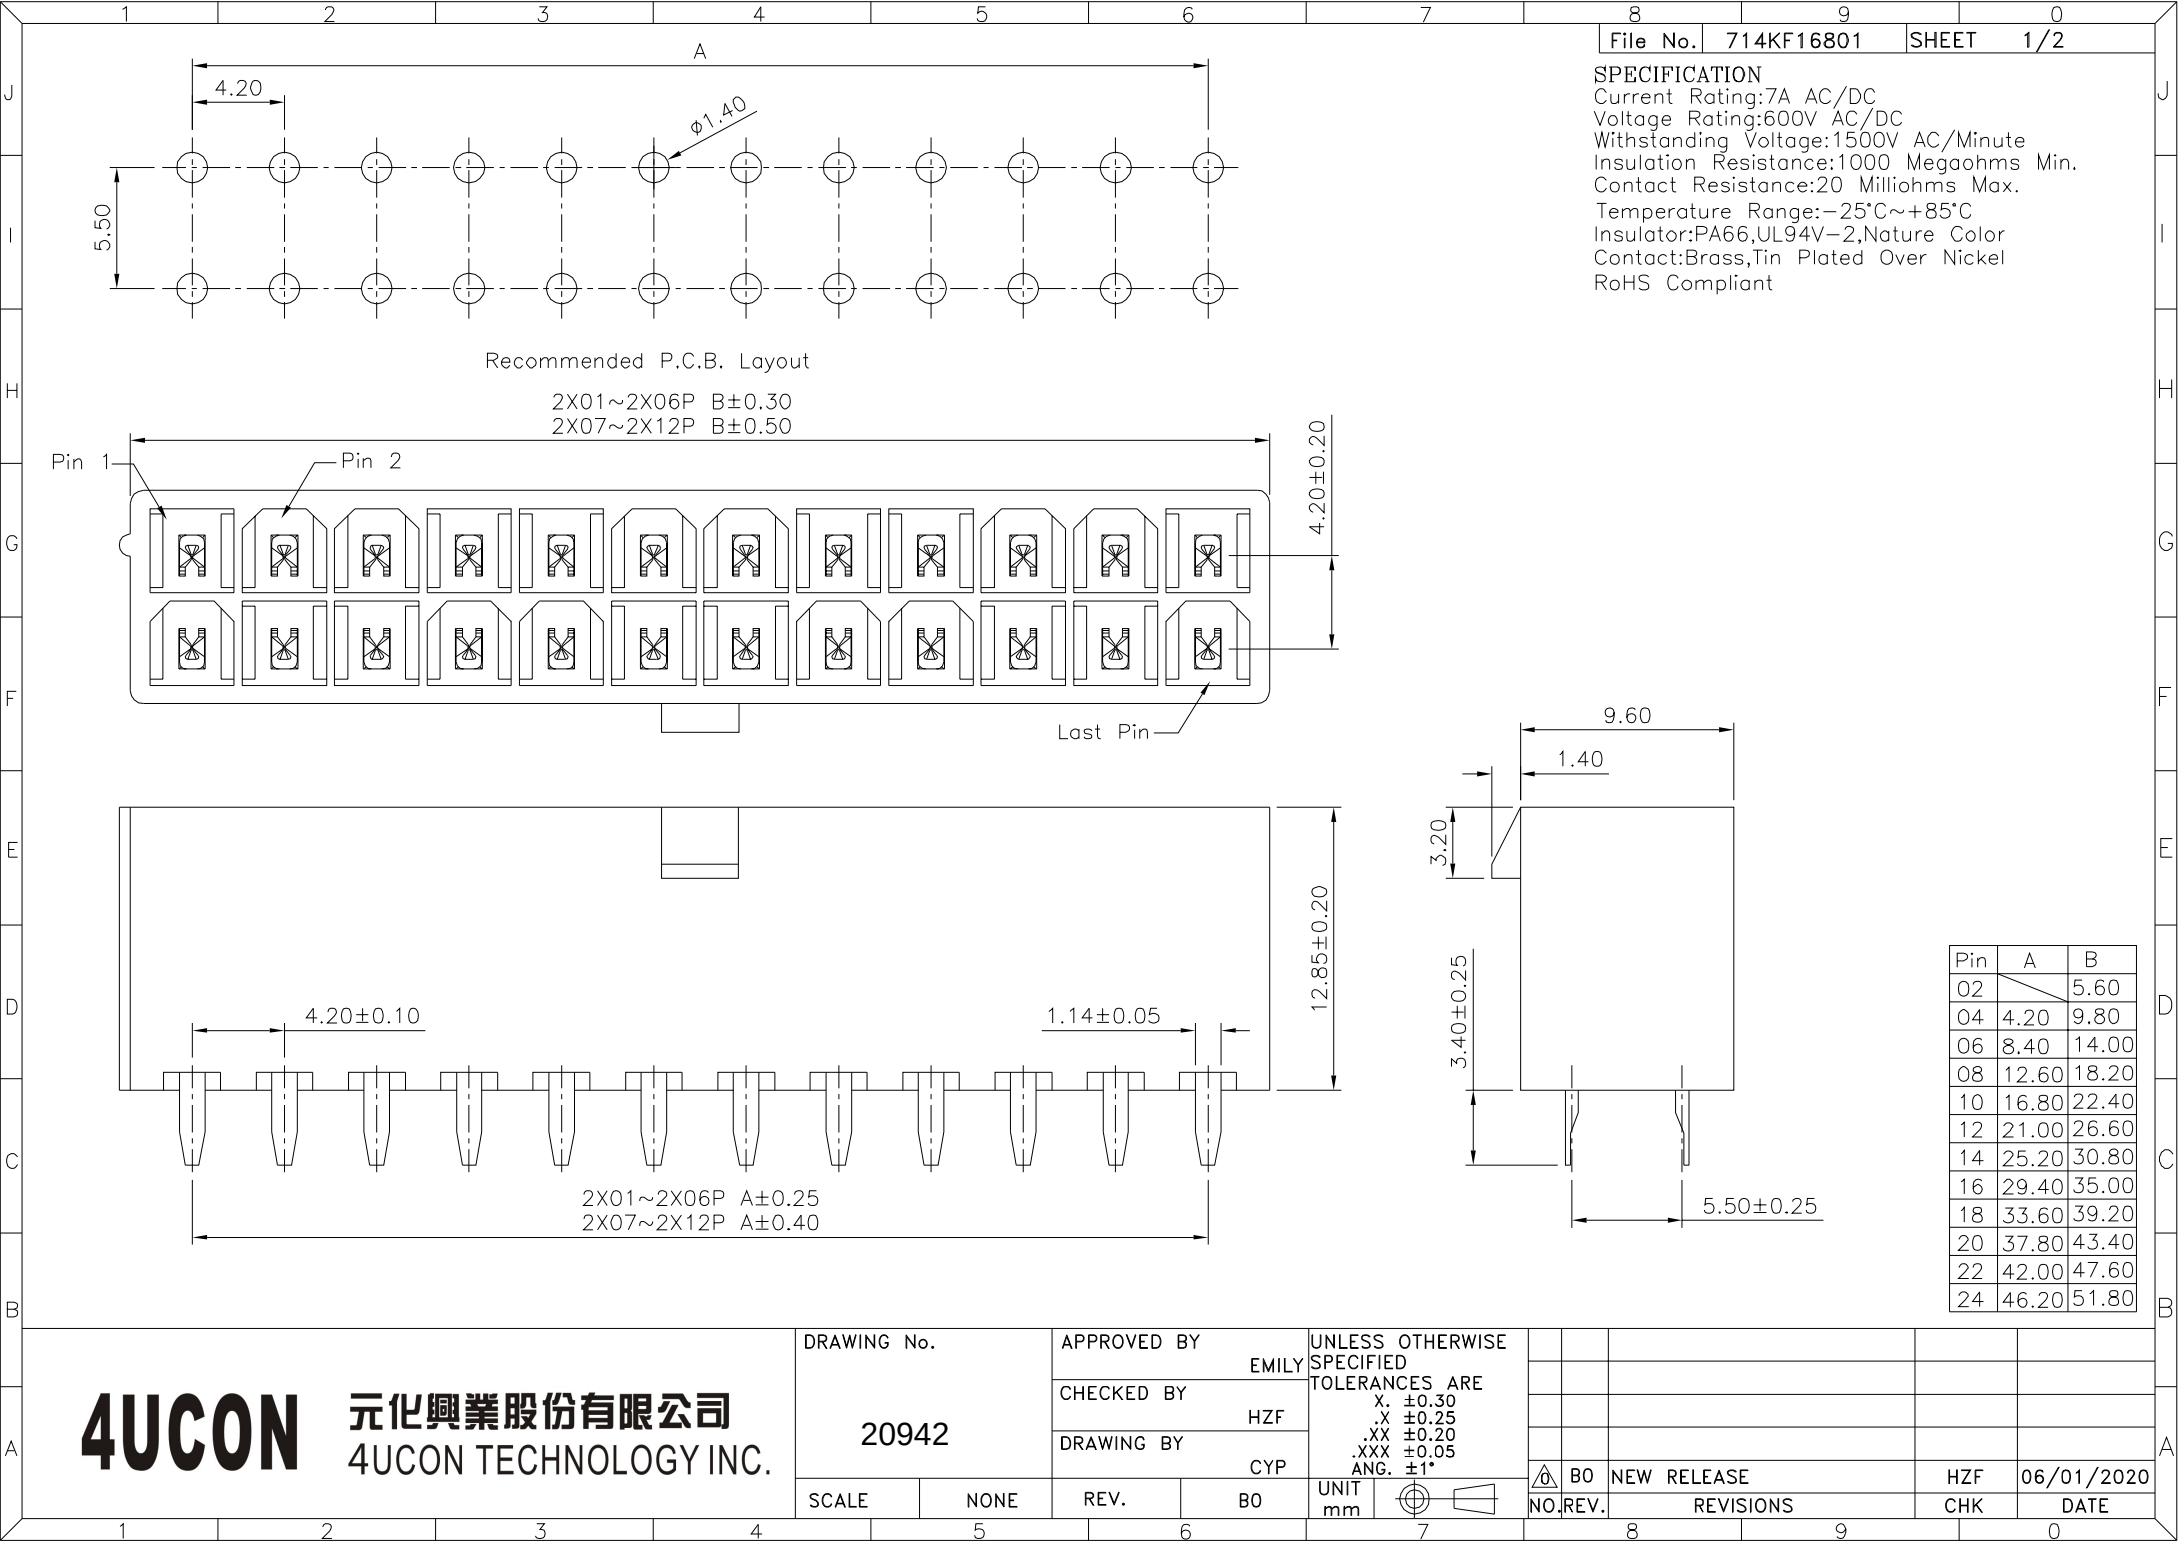

SPECIFICATION
Current Rating:7A AC/DC
Voltage Rating:600V AC/DC
Withstanding Voltage:1500V AC/Minute
Insulation Resistance:1000 Megaohms Min.
Contact Resistance:20 Milliohms Max.
Temperature Range:-25°C~+85°C
Insulator:PA66,UL94V-2,Nature Color
Contact:Brass,Tin Plated Over Nickel
RoHS Compliant

Recommended P.C.B. Layout

2X01~2X06P B±0.30
2X07~2X12P B±0.50


2X01~2X06P A±0.25
2X07~2X12P A±0.40

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.


DRAWING No.		APPROVED BY	
		EMILY	
		CHECKED BY	
20942		HZF	
		DRAWING BY	
		CYP	
SCALE	NONE	REV.	BO

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE					
UNIT	mm				


NO.	REV.	BO	NEW RELEASE	HZF	06/01/2020
		REVISIONS		CHK	DATE

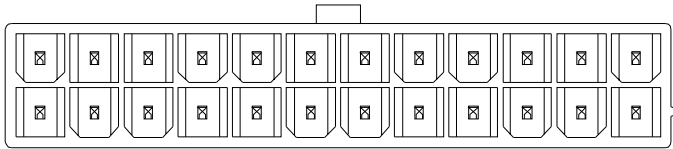


2X12P

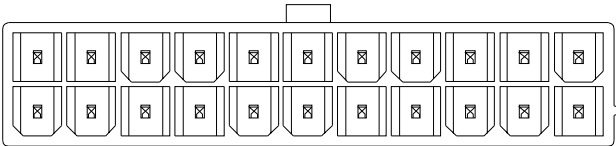


2X11P

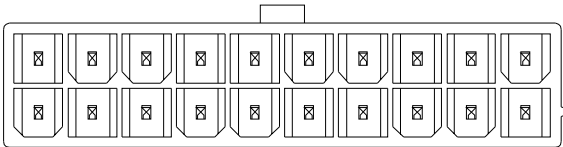


2X10P

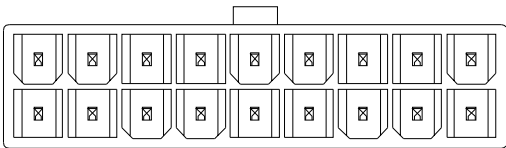


2X9P

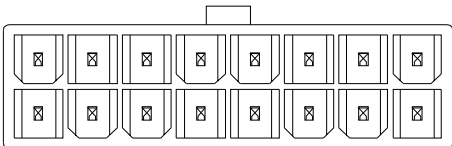


2X8P

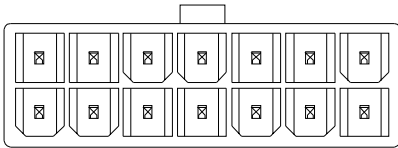


2X7P




2X6P




2X5P




2X4P



2X3P



2X2P



2X01P

4UCON

元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. 20942		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.30 .X ±0.25 .XX ±0.20 .XXX ±0.05 ANG. ±1°							
		EMILY									
		CHECKED BY									
		HZF									
		DRAWING BY									
		CYP									
SCALE		NONE	REV.	B0	UNIT mm			BO	NEW RELEASE	HZF	06/01/2020
								NO. REV.	REVISIONS	CHK	DATE