

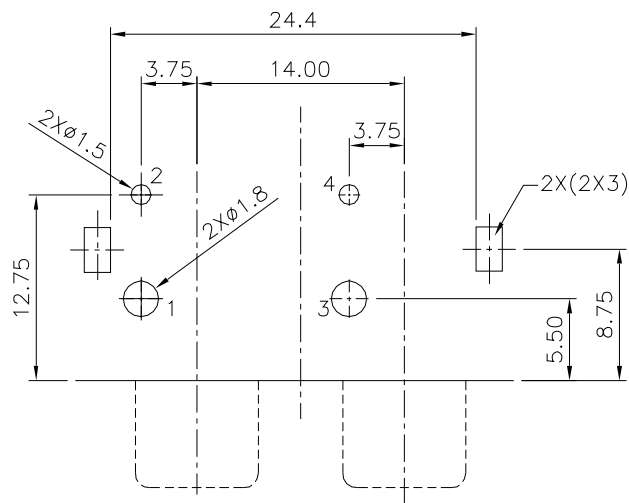



△ SPECIFICATION

Current Rating:1A Max.
Voltage Rating:12V DC
Withstand Voltage:500V AC Min.
Insulation Resistance:100 Megaohms Min.
Contact Resistance:30 Milliohms Max.
After Testing:100 Milliohms Max.
Temperature Range:-20°C~+60°C
RoHS Compliant

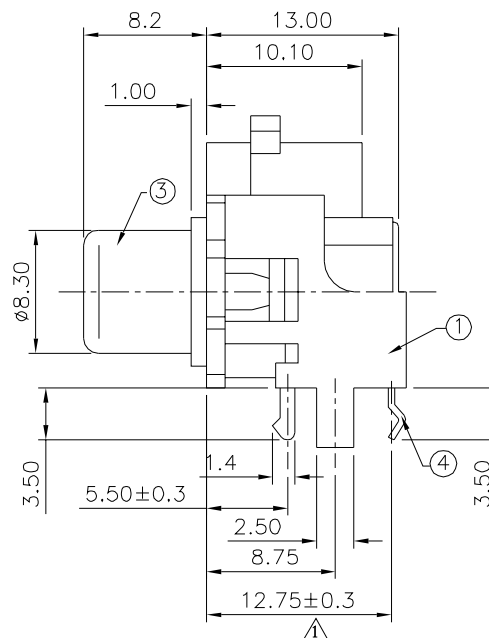

△ PCB Layout(Top View)

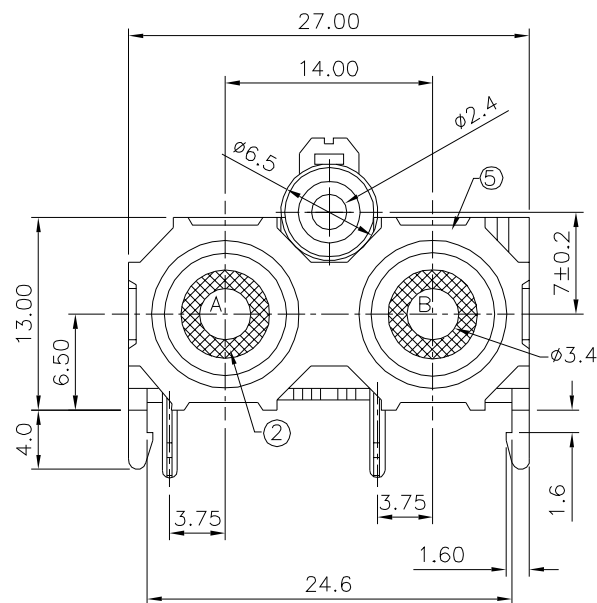

Schematic

⑤	Cover	ABS	1	Black
④	Terminal	Brass	2	CuSn Plated
③	Socket	Brass	2	CuSn Plated
②	Ring	PBT	2	A:White,B:Red
①	Body	ABS	1	Black
No.	Part Name	Material	Q'ty	Finish

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

20950

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

XYH

SCALE

NONE

REV.

A1

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
L≤4 ±0.2
4<L≤16 ±0.3
16<L≤63 ±0.4
63<L ±0.5
ANG. ±5°

UNIT
mm



△ A1

Modify Data

HZF

07/28/2025

△ A0

NEW RELEASE

HZF

07/03/2016

NO. REV.

REVISIONS

CHK

DATE