

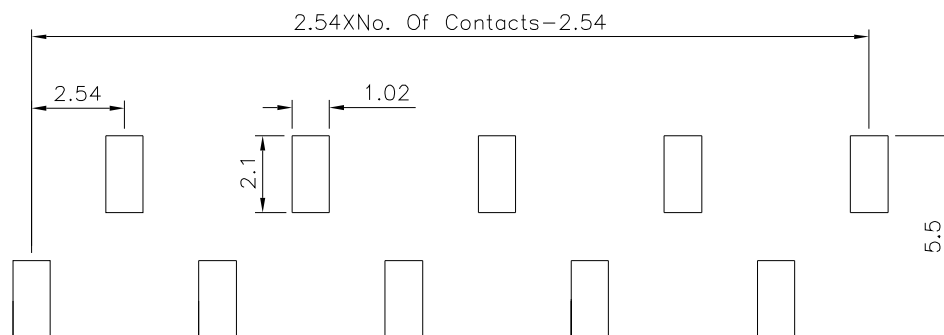
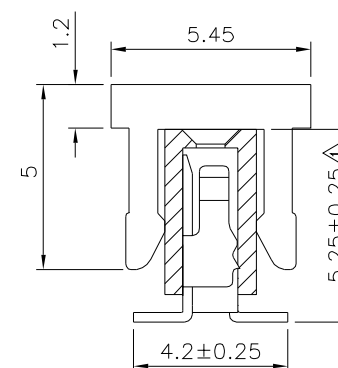


SPECIFICATION

Current Rating:3A
 Withstand Voltage:1000V AC
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operation Temperature:-40°C~+105°C
 Housing:PA6T(UL94V-0),Black
 ⚠ Contact:Phosphor Bronze,Gold Flash Over Nickel
 RoHS Compliant

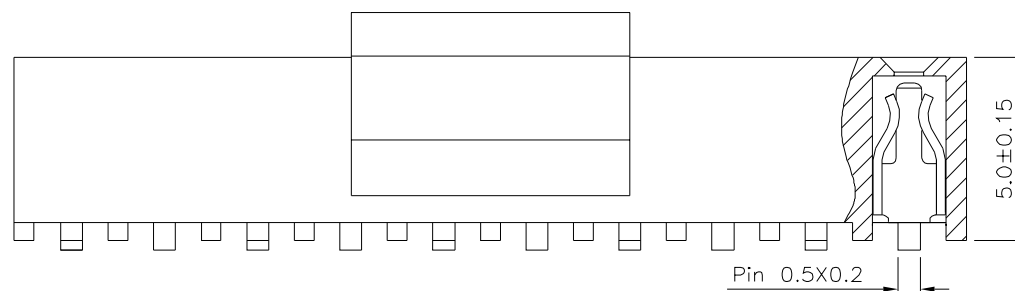

⚠ Recommended P.C.B. Layout(Top View)
 (PCB Board Tolerance ± 0.05)

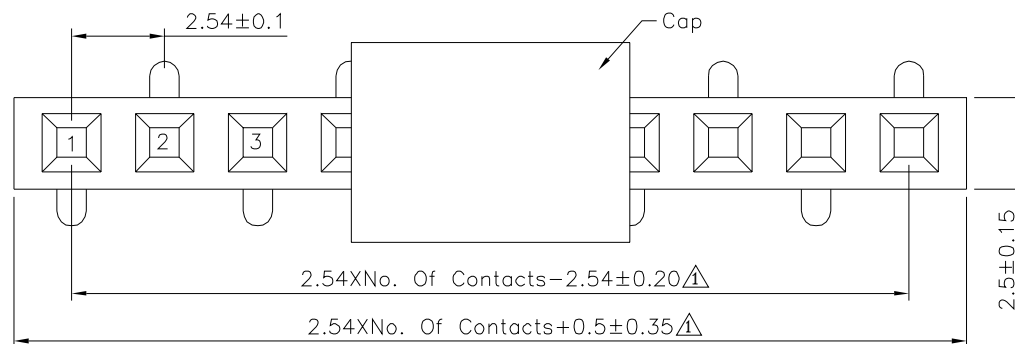

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

20976

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP


REV.

A2

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE

X. ± 0.25 X.* $\pm 2^{\circ}$
 .X ± 0.20 .X* $\pm 1.5^{\circ}$
 .XX ± 0.15 .XX* $\pm 1^{\circ}$
 .XXX ± 0.10 .XXX* $\pm 0.5^{\circ}$

UNIT
 mm



5-	A2	Modify Data	HZF	04/08/2016
5-	A1	Modify Data	HZF	10/26/2015
	A0	NEW RELEASE	HZF	09/30/2013
	NO.REV.	REVISIONS	CHK	DATE