
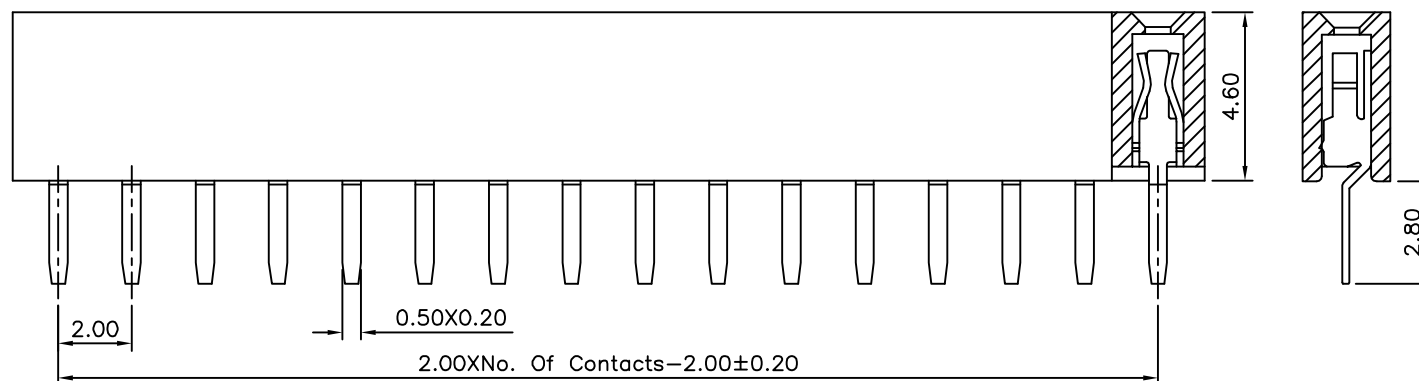


Recommended P.C.B. Layout

SPECIFICATION

Current Rating:1.5 Amp/Contact Max.
Withstand Voltage:450V AC/Minute
Contact Resistance:20 Milliohms Max./Contact
Insulation Resistance:1000 Megaohms Min. At 100V
Operation Temperature:-55°C~+105°C
Contact:Phosphor Bronze,Gold Flash Over Nickel
Insulator:PA6T+30%G.F.(UL94V-0),Black
RoHS Compliant

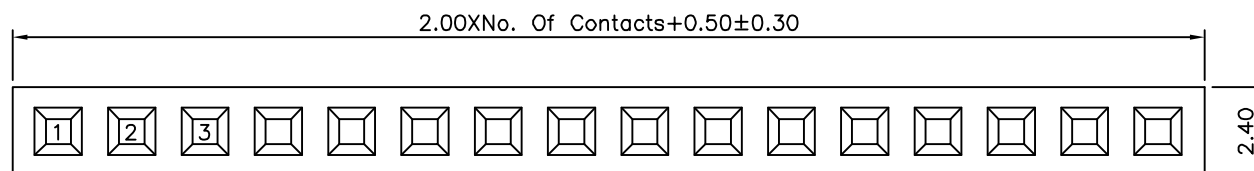

4U CON 元化興業股份有限公司
4U CON TECHNOLOGY INC.

DRAWING No.

21082

SCALE	NONE
-------	------

NONE

APPROVED BY

EMILY

CHECKED BY

HZF


DRAWING BY

SONG

Y	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
---	---

	TOLERANCES ARE
	X. ± 0.50
	.X ± 0.30
	.XX ± 0.20
	.XXX ± 0.10
G	ANG. $\pm 5^\circ$

UNIT	mm
------	----



△	AO
NO.	REV.

	NEW RELEASE
--	-------------

REVISIONS

HZF

04/12/2013

CHK

	DATE
--	------