

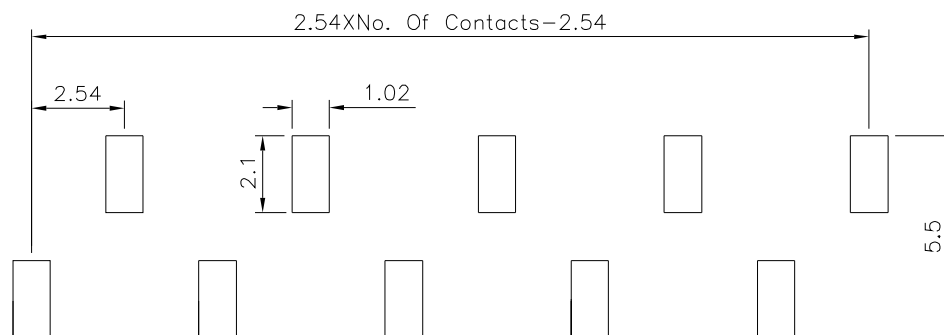
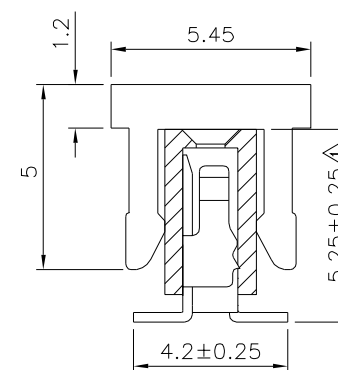


SPECIFICATION

Current Rating:3A
 Withstand Voltage:1000V AC
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operation Temperature:-40°C~+105°C
 Housing:PA6T(UL94V-0),Black
 ⚠ Contact:Phosphor Bronze,Gold Flash Over Nickel
 RoHS Compliant

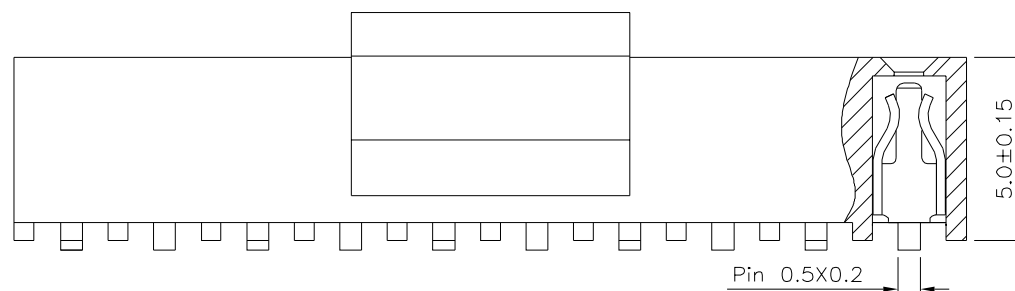

⚠ Recommended P.C.B. Layout(Top View)
 (PCB Board Tolerance±0.05)

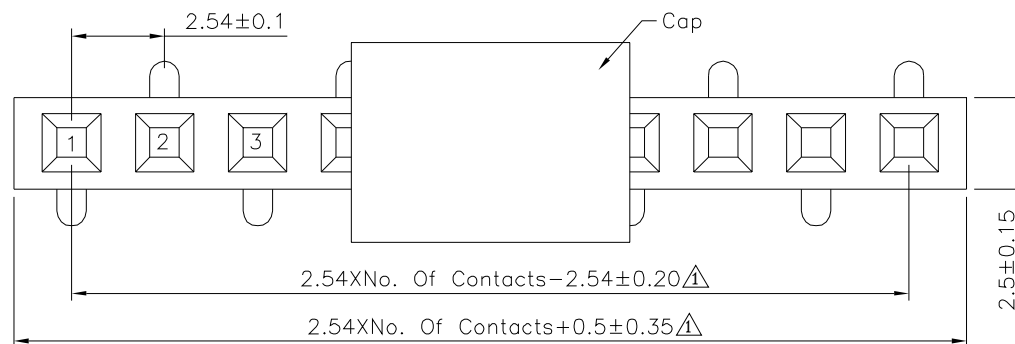

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

21168

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP


REV.

A2

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

X. ±0.25 X.* ±2*
 .X ±0.20 .X* ±1.5*
 .XX ±0.15 .XX* ±1*
 .XXX ±0.10 .XXX* ±0.5*

UNIT mm



5-	A2	Modify Data	HZF	04/08/2016
5-	A1	Modify Data	HZF	10/26/2015
	A0	NEW RELEASE	HZF	09/30/2013
	NO.REV.	REVISIONS	CHK	DATE