



Recommended P.C.B. Layout (Top View)
(PCB Board Tolerance ±0.05) ⚠


⚠ SPECIFICATION
 Current Rating: 3 Amp
 Withstand Voltage: 1000V AC Min./Minute
 Contact Resistance: 20 Milliohms Max.
 Insulation Resistance: 1000 Megaohms Min.
 Operation Temperature: -40°C ~ +105°C
 Insulator: PBT (UL94V-0), Black
 Contact: Phosphor Bronze, Gold Flash Over Nickel
 RoHS Compliant

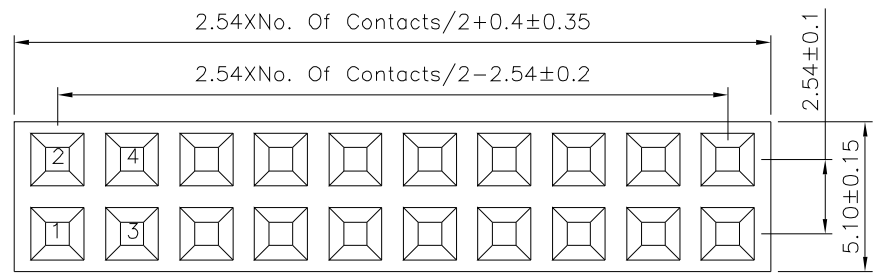

⚠

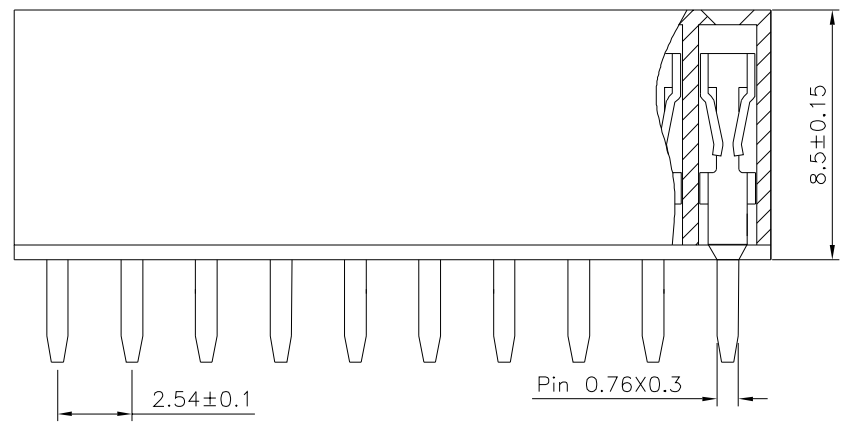

⚠

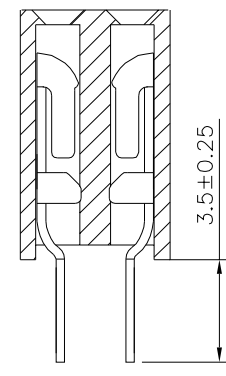

⚠

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
21227		MEI		X. ±0.25 X.* ±2°	
		CHECKED BY		.X ±0.20 .X.* ±1.5°	
		HZF		.XX ±0.15 .XX.* ±1°	
		DRAWING BY		.XXX ±0.10 .XXX.* ±0.5°	
		CYP			
SCALE	NONE	REV.	A1	UNIT	mm

NO.	REV.	REVISIONS	CHK	DATE
⚠ A1		Modify Data	HZF	10/15/2019
⚠ A0		NEW RELEASE	HZF	03/04/2013