


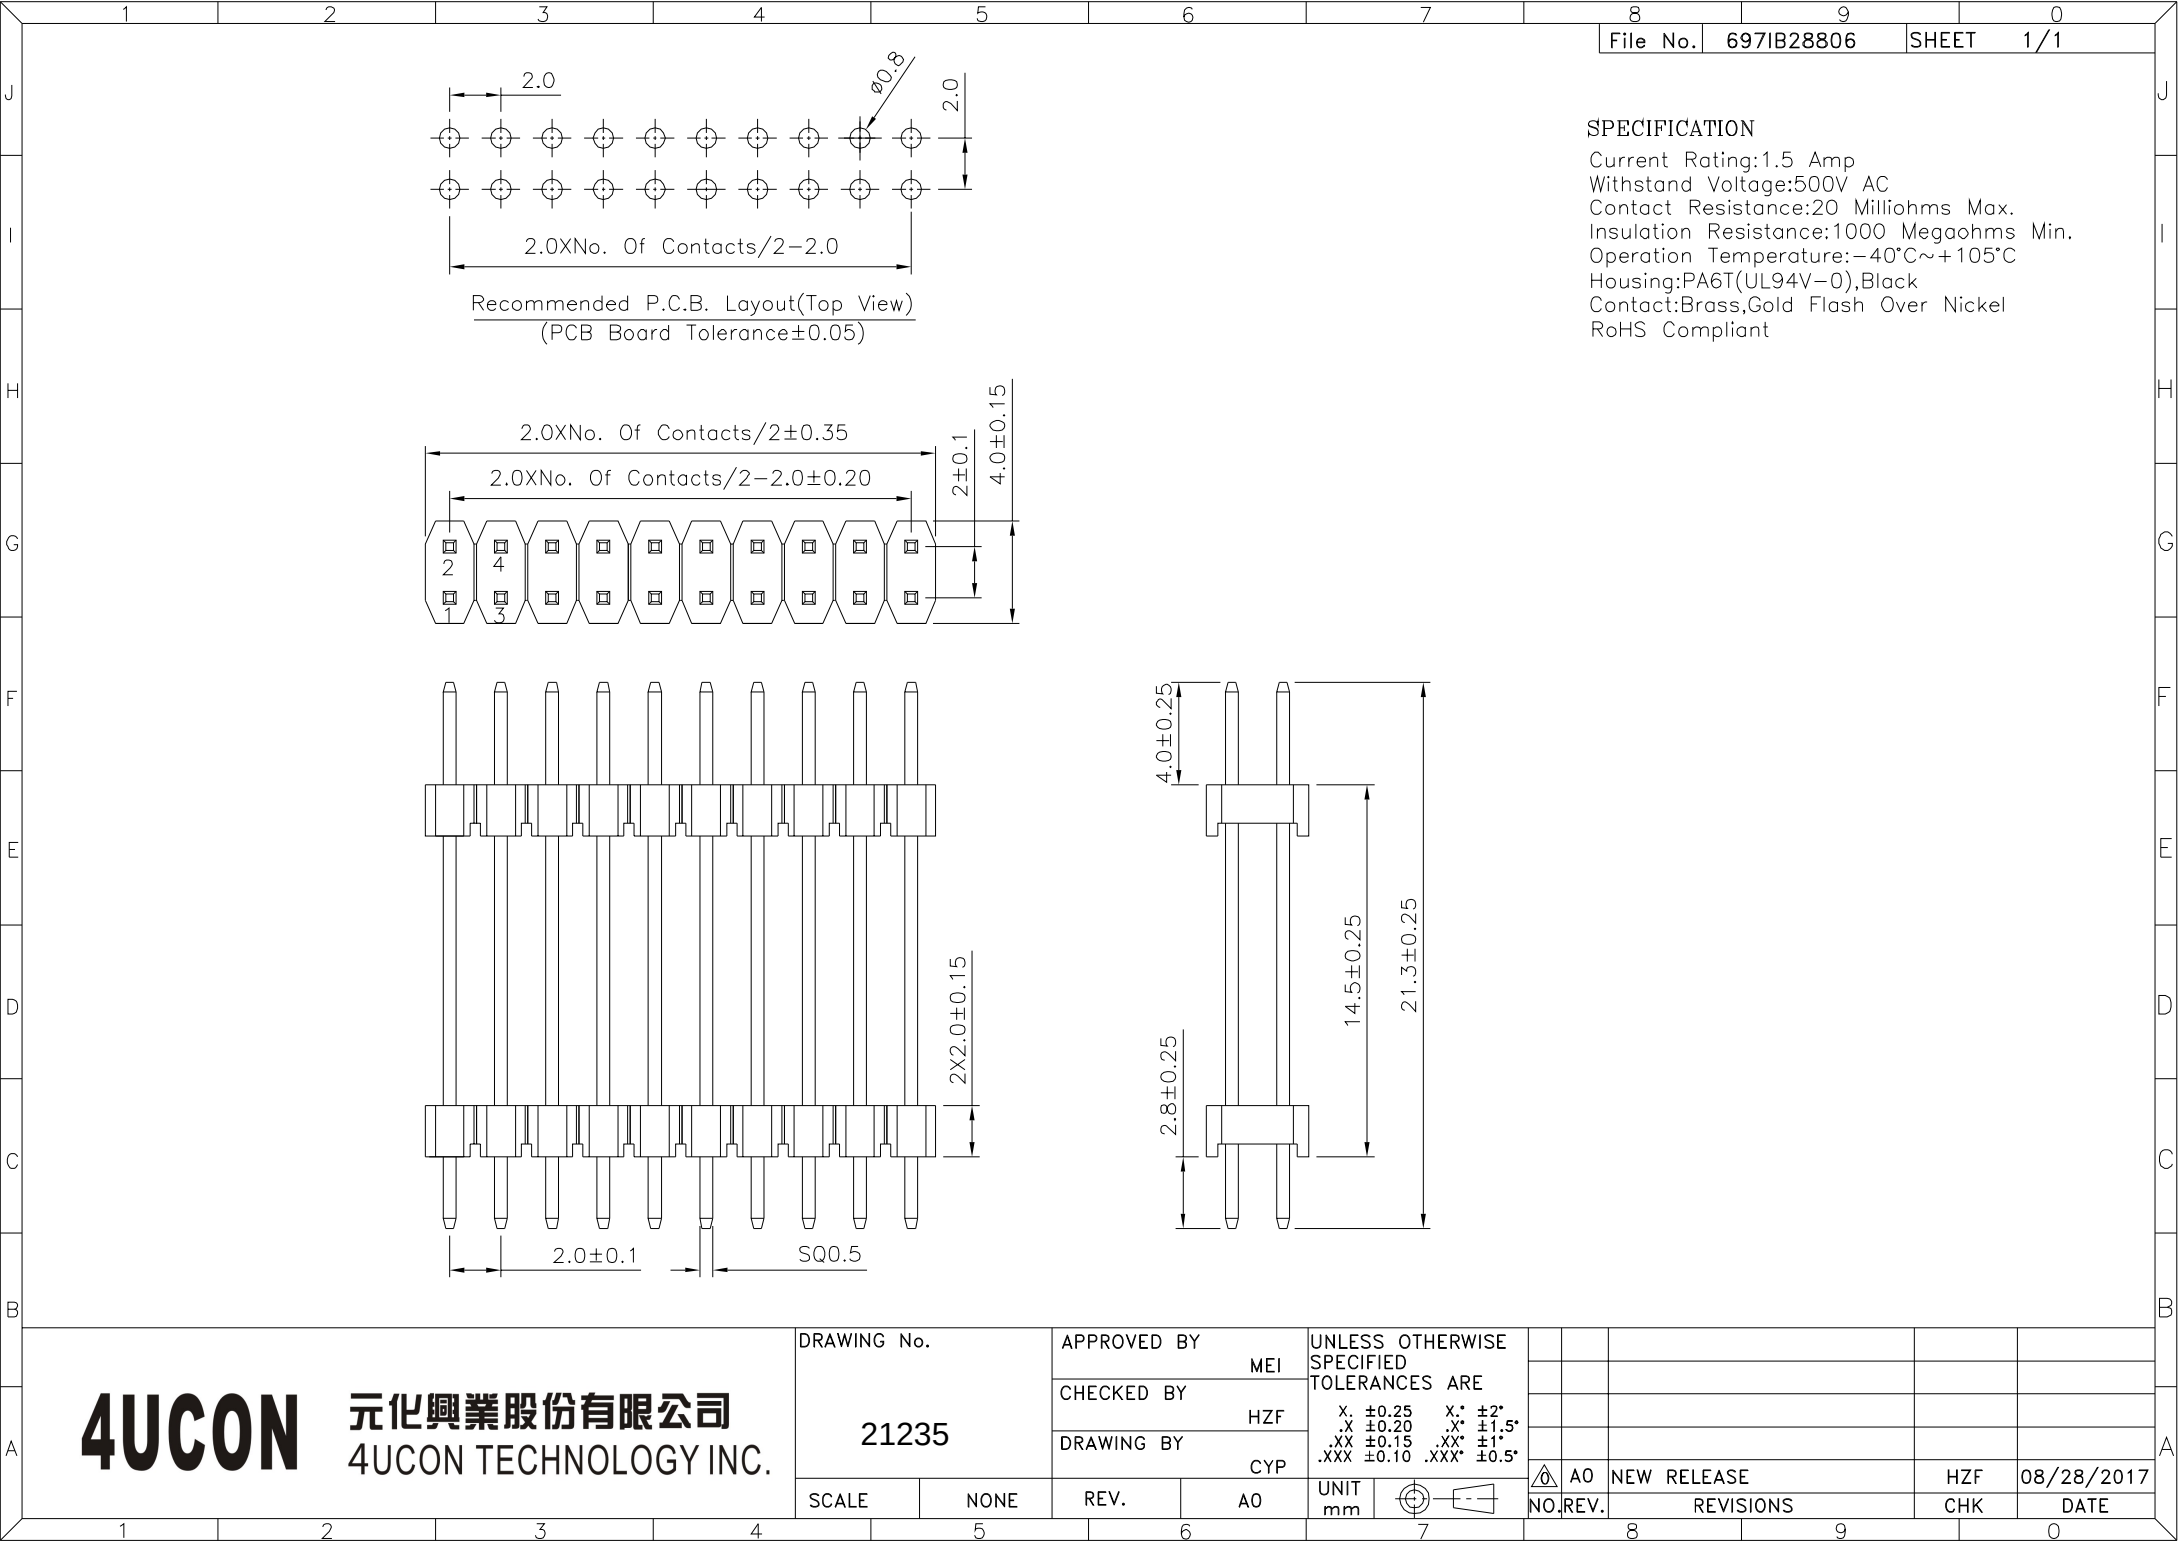

SPECIFICATION
Current Rating:1.5 Amp
Withstand Voltage:500V AC
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:-40°C~+105°C
Housing:PA6T(UL94V-0),Black
Contact:Brass,Gold Flash Over Nickel
RoHS Compliant

DRAWING No. 21235		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.25 X.° ±2° .X ±0.20 .X.° ±1.5° .XX ±0.15 .XX.° ±1° .XXX ±0.10 .XXX.° ±0.5°						
		MEI								
		CHECKED BY								
		HZF								
		DRAWING BY								
		CYP								
SCALE	NONE	REV.	A0	UNIT mm			A0	NEW RELEASE	HZF	08/28/2017
						NO.	REV.	REVISIONS	CHK	DATE