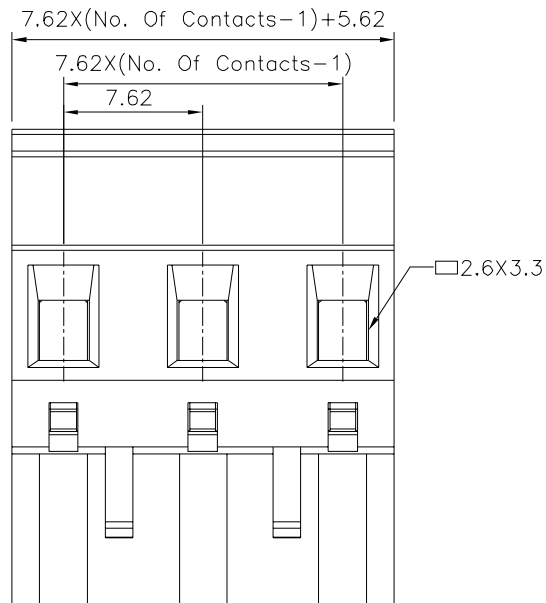
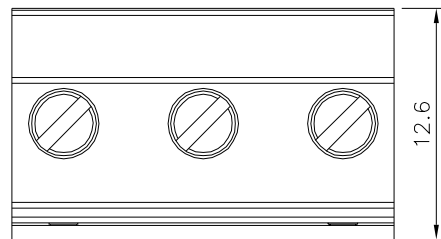


SPECIFICATION

Current Rating:16 Amps/Way Max.

Voltage Rating: 300V AC

Contact Resistance: 20 Milliohms Max.

Withstanding Voltage:2500V AC(1 Minute)

Test Time=60 Sec/1 PCS

Wire Range:12~26 AWG

Operating Temperature: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$

Torque: 5.0 Kgf.cm/M3

Soldering Reliability:

Test Temperature=250°C±10°C,5s Max.

Terminal Screw: Steel, Galvanized With Cr3+ Plated

Contact(Metal Housing):Copper Alloy,Nickel Plated

Wire Guard:Copper Alloy,Tin Plated

Insulator Body(Housing):Polyamide(UL94V-0)

RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

21241

APPROVED BY

MEI

CHECKED BY


HZF

DRAWING BY

CYP

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
X. ± 0.50	
.X ± 0.30	
.XX ± 0.20	
ANG. $\pm 1^\circ$	

UNI
mm



	AO
NO. REV.	

	NEW RELEASE
--	-------------

REVISIONS

HZF

05/13/2017

CHK

DATE _____