

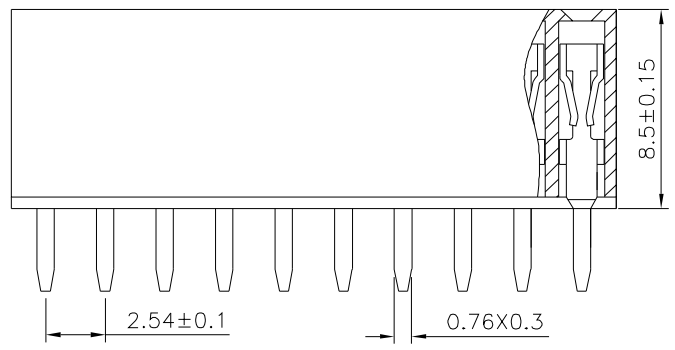


SPECIFICATION
 Current Rating: 3A
 Withstand Voltage: 1000V AC
 Contact Resistance: 20 Milliohms Max.
 Insulation Resistance: 1000 Megaohms Min.
 Operation Temperature: -40°C ~ +105°C
 Housing: PA6T (UL94V-0), Black
 Contact: Phosphor Bronze, Tin Plated Over Nickel
 RoHS Compliant

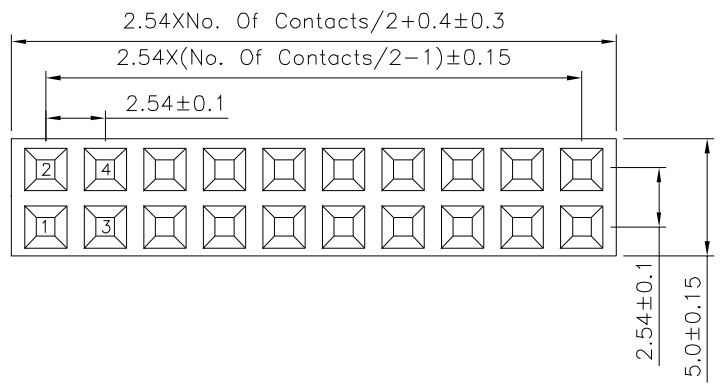

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
21274		EMILY		
		CHECKED BY		
SCALE		HZF		
		DRAWING BY		
NONE		HAO		X. ±0.25 X* ±2°
REV.		A0		.X ±0.20 .X* ±1.5°
UNIT		mm		.XX ±0.15 .XX* ±1°
REV.		A0		.XXX ±0.10 .XXX* ±0.5°

NO.	REV.	REVISIONS	CHK	DATE
△	A0	NEW RELEASE	HZF	02/15/2014